

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD:
- | | |
|----------------------|-----------------------------------|
| UNIT TYPE: | MONITORED INPUT |
| ORIENTATION: | VERTICAL, MID |
| OUTLET QTY&TYPE: | (20) C13, (4) C19 |
| INPUT VOLTAGE: | 200-240VAC |
| INPUT CURRENT: | 32A |
| BREAKER QTY&TYPE: | (2) 16AMP, SINGLE-POLE |
| INPUT PHASE: | SINGLE-PHASE |
| RATED POWER: | 7.4kVA |
| INPUT PLUG: | IEC 60309 2P+E 6H |
| INPUT POWER CORD: | SEE SHEET 2 FOR PART NUMBER TABLE |
| REGULATORY STANDARD: | RoHS COMPLIANT |

2. ADDITIONAL:
THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS


3. ACCESSORIES:
DOCUMENTATION KIT
PRODUCT SAFETY WARNING SHEET

NOTES:


- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P24D03G-XX Y Z**

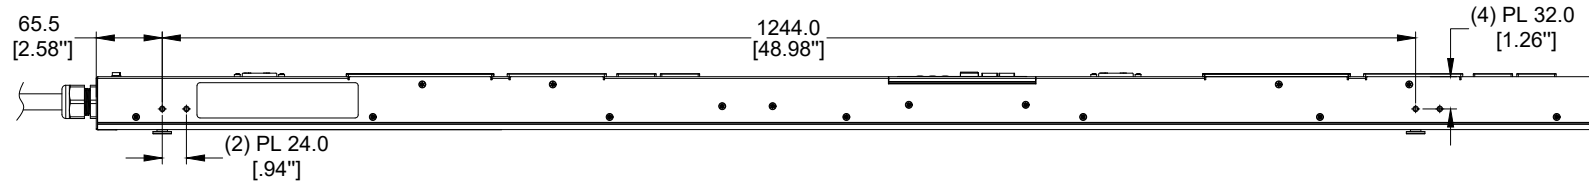


LEFT VIEW

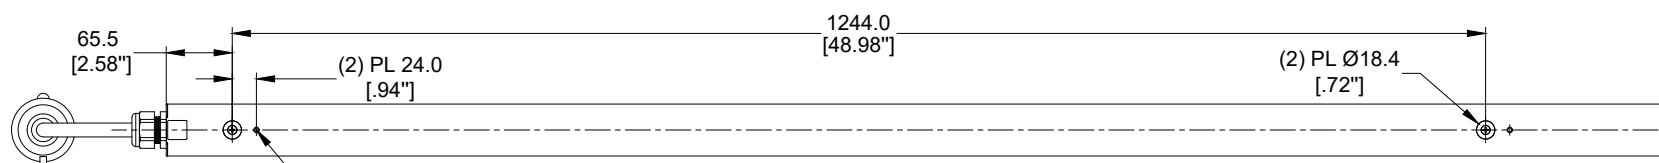


REAR VIEW

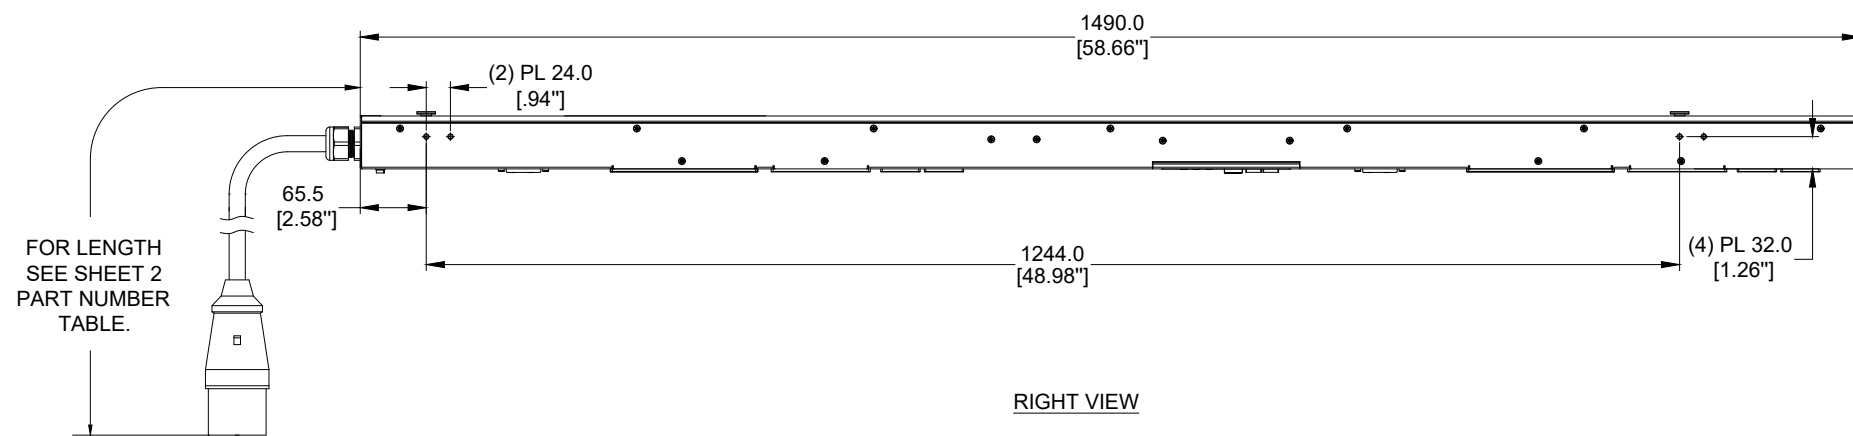

RIGHT VIEW

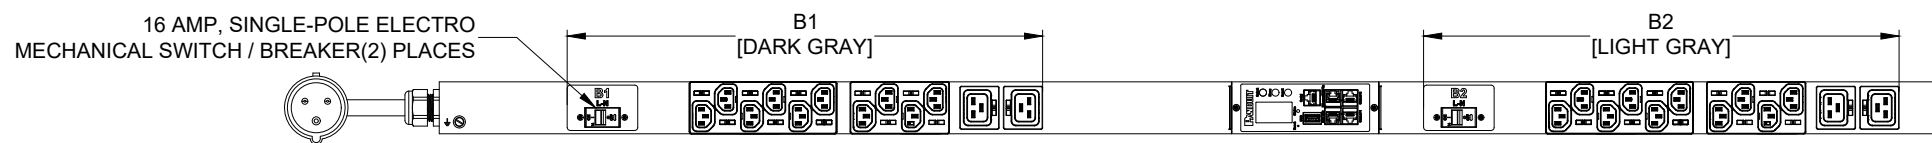

FRONT VIEW




BOTTOM VIEW

XX: FINISHED GOOD COLOR BL=BLACK YL=YELLOW RD=RED BU=BLUE WH=WHITE GN=GREEN	Y: INPUT FEED TYPE 1=TOP-END FED 2=BOTTOM-END FED	Z: INPUT CORD LENGTH A=1 METER B=2 METER C=3 METER
--	---	---


PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPASHPROOF)
32A, 200-250V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	08/31/2023	CCQ	CSH	MJD	INITIAL RELEASE	P24D03G-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24D03G-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24D03G-XXYZ_DC
DRAWN BY: CCQ	DATE: 08/31/2023	CHK: CSH
SCALE: NONE	SHT 1 OF 2	
SCALE: B		

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D03G	G6 MI PDU, 32AMP, (20)C13 (4)C19, IEC 60309 2P 3W 6H IP44-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254mm/-127mm) 10'[+10"/-5"]	6.8kg



B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	08/31/2023	CCQ	CSH	MJD	INITIAL RELEASE	P24D03G-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P24D03G-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A	
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P24D03G-XXYZ_DC	
DRAWN BY	DATE	CHK	SCALE
CCQ	08/31/2023	CSH	NONE
SHT 2 OF 2			SCALE B

2

1

