


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

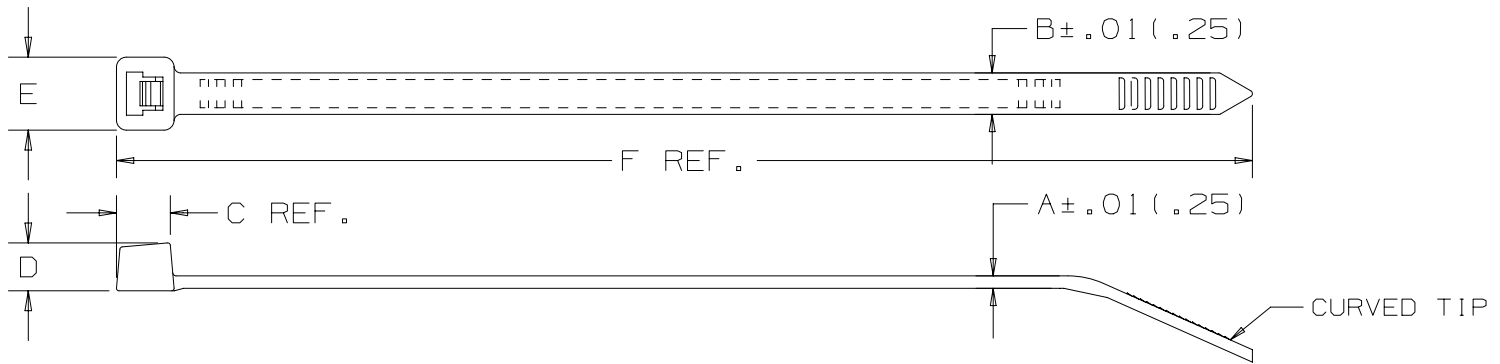

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
PLT1M	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	18 (80)	MINIATURE	.07 (32)
PLT2I	.06 (1.5)	2.00 (51)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	8.0 (203)	40 (178)	INTERMEDIATE	.20 (91)
PLT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.316 (8.0)	7.4 (188)	50 (222)	STANDARD	.29 (132)
PLT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	50 (222)	STANDARD	.45 (204)

NOTES:

- * 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE. SEE NOTE 2 FOR PART NUMBER SUFFIX FOR PART COLOR.
- 2. CABLE TIES ARE AVAILABLE IN 4 DIFFERENT FLUORESCENT COLORS:

PART NUMBER SUFFIX	COLOR
-53	ORANGE
-54	YELLOW
-55	GREEN
-59	PINK



REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	SCALE	SHT 1 OF 1	SIZE
							PREMIUM FLUORESCENT LOCKING CABLE TIE			A
							CUSTOMER DRAWING			
							ITEM REVISION NAME			
							03431NKD/07			
							DATASET FILE NAME			
							03431NKD/07			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
							.x ± ---- .xxx ± .020 (.51)			
							.xx ± .02 (.5) ANGLES ± ----			
							THIRD ANGLE PROJECTION			
							DRAWING NUMBER:			
							SS-26476			
							DRAWN BY			
							C.HARVELL			
							DATE			
							11/08/91			
							CHK			
							HVP			
							SCALE			
							NONE			

D10100DA/16