


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

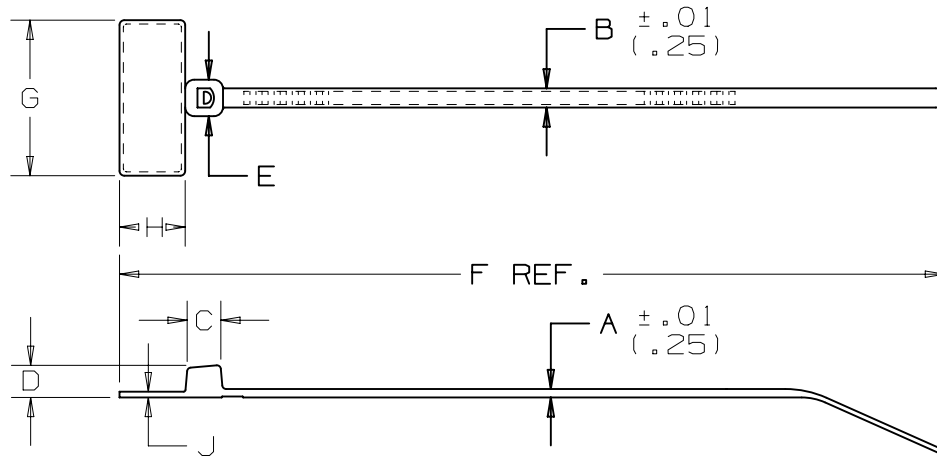

PANDUIT * PART NO.	BUNDLE DIA.		A IN. (mm)	B IN. (mm)	C IN. (mm)	D IN. (mm)	E IN. (mm)	F IN. (mm)	G IN. (mm)	H IN. (mm)	J IN. (mm)	WRITE-ON AREA IN. (mm)	MINIMUM LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs/100pcs. (g)
	MIN IN. (mm)	MAX IN. (mm)													
PLF1M-69	.06 (1.5)	.87 (22.1)	.045 (1.1)	.098 (2.5)	.177 (4.5)	.154 (3.9)	.180 (4.6)	4.3 (109)	.812 (20.6)	.366 (9.3)	.028 (.71)	.31 × .75 (7.9 × 19.1)	18 (80)	MINIATURE	.10 (46)

NOTES:

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.
- 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).
- 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
- 6) COLOR: NATURAL--OFF WHITE.



TITLE <b>PREMIUM FLAG MARKER TIE FLAME RETARDANT SERIES</b>											
CUSTOMER DRAWING											
ITEM REVISION NAME 03431NKE/03						<b>PANDUIT</b>					
DATASET FILE NAME 03431NKE/03											
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]										MATERIAL: FLAME RETARDANT NYLON 6/6	
.x ± ----					.xxx ± .020 [ .51 ]					DRAWING NUMBER: <b>SS-26822</b>	
.xx ± .02 [ .5 ]					ANGLES ± ----					THIRD ANGLE PROJECTION	
DRAWN BY RAMA		DATE 5-19-93		CHK HVP		SCALE NONE		SHT 1 OF 1		SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	11-01-24	BDK	JADE	DJSL	A. UPDATED TITLE BLOCK WITH ALTERNATE DESCRIPTION	006205 r00

XGLOBAL-ASIZE