THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

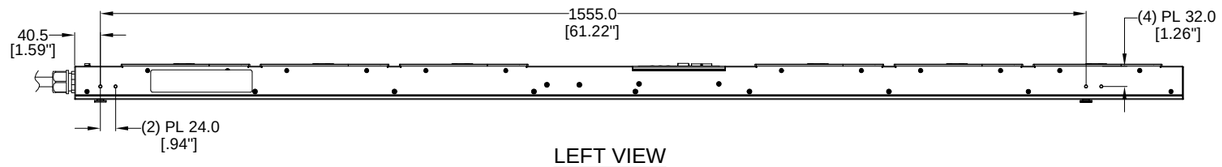

LEFT VIEW

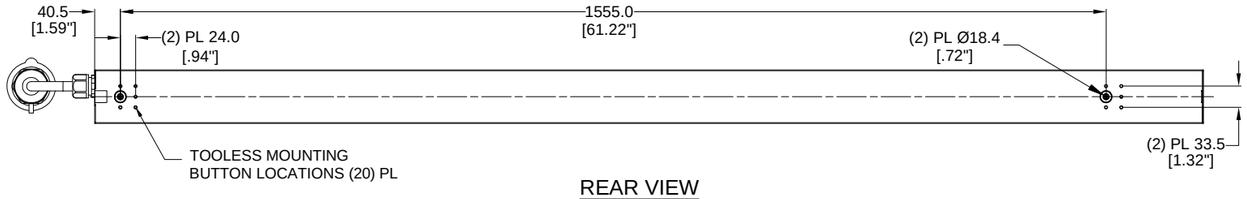

REAR VIEW

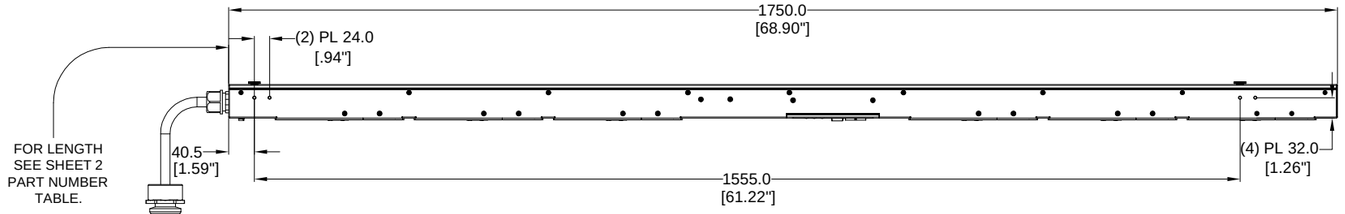

RIGHT VIEW

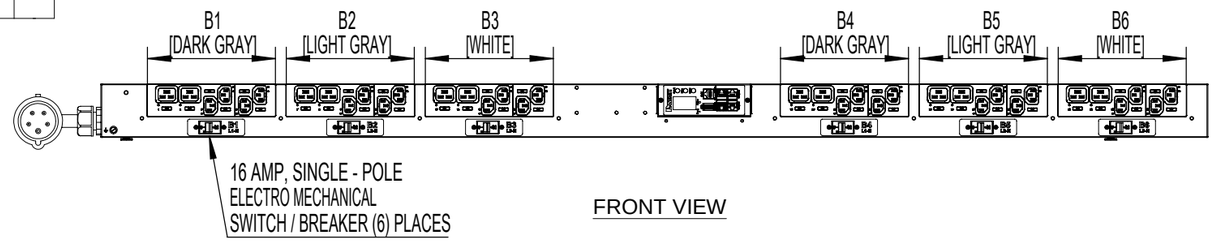

FRONT VIEW



BOTTOM VIEW

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	SEE SHEET 2
ORIENTATION:	VERTICAL, 0U FULL, WIDE
OUTLET QTY&TYPE:	(24) C13, (12) C19
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	32A
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
   THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:
   DOCUMENTATION KIT
   PRODUCT SAFETY WARNING SHEET

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION
6. PARTS USING UPGRADEABLE iPDU BLANKING PANEL CAN BE UPGRADED TO INTELLIGENT MODELS USING PANDUIT CONTROLLER PART NUMBER MA002

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36E09G-XX Y Z

XX: FINISHED GOOD COLOR		Y: INPUT FEED TYPE	Z: INPUT CORD LENGTH
BL =BLACK	YL =YELLOW	1 =TOP-END FED	A =1 METER
RD =RED	BU =BLUE	2 =BOTTOM-END FED	B =2 METER
WH =WHITE	GN =GREEN		C =3 METER

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPLASHPROOF)
32A, 346-415V MAX RATED INPUT

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	09/01/2023	CCQ	CSH	MJD	INITIAL RELEASE	P36E09G-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE:
INTELLIGENT SERIES PDU
P36E09G-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P36E09G-XXYZ_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 2	SCALE
CCQ	09/01/2023	CSH	NONE		B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E09G	G6 MS PDU, 32AMP, (24)C13 (12)C19, IEC 60309, 4P 5W, 6H IP44-3M, TOP FED,BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	10.8kg

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	09/01/2023	CCQ	CSH	MJD	INITIAL RELEASE	P36E09G-XXYZ

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN

DATE

PRINT

TITLE:
INTELLIGENT SERIES PDU
P36E09G-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P36E09G-XXYZ_DC

DRAWN BY	DATE	CHK	SCALE
CCQ	09/01/2023	CSH	NONE

SHT 2 OF 2

SCALE B