


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

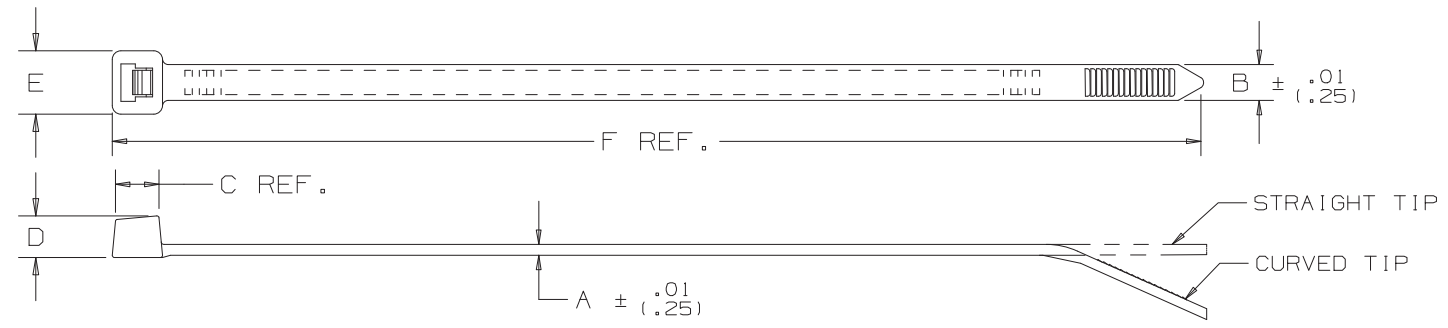

PANDUIT PART NO. *	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE lbs. (N)	CROSS ** SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-60	.06 (1.5)	.87 (22)	.043 (1.1)	.098 (2.5)	.170 (4.3)	.154 (3.9)	.188 (4.8)	3.9 (99)	18 (80)	M	CURVED	.07 (32)
PLT2S-60	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.260 (6.6)	.220 (5.6)	.320 (8.1)	7.4 (188)	50 (222)	S	CURVED	.29 (132)

NOTES:

- \* 1) SEE [www.panduit.com](http://www.panduit.com) FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- \*\* 2) CABLE TIE CROSS-SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD & H=HEAVY.
- 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).
- 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
- 6) COLOR: BLACK



N\GLOBAL-ASIZE

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07A	3.04.25	BWG	JADE	DJSL	TITLE WAS SHOWN AS CONTROL DRAWING.	008507/00
06	11-01-24	BDK	JADE	DJSL	A. UPDATED TITLE BLOCK WITH ALTERNATE DESCRIPTION	006205 r00

TITLE <b>PREMIUM CABLE TIES BLACK FLAME RETARDANT -60 SERIES</b> CUSTOMER DRAWING					
ITEM REVISION NAME W10001EF/07					
DATASET FILE NAME W10001EF/07					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± ---- .xxx ± .020 (.51) .xx ± .02 (.5) ANGLES ± ----					
DRAWN BY KET			DATE 2-3-95		CHK HVP
SCALE NONE			DRAWING NUMBER: SS-26944		
SHT 1 OF 1					SIZE A