


PART NUMBER	DIMENSIONS - IN								
	$\pm .06$ L [1.5]	$\pm .04$ W [1.0]	$\pm .04$ G [1.0]	D DIA $\pm .02$ [0.5]	C RAD REF	$\pm .01$ T [0.3]	$\pm .04$ B [1.0]	O.D. $\pm .01$ [0.3]	I.D. $\pm .01$ [0.3]
LCAXN300-38-6	2.91 [73.9]	0.95 [24.1]	0.50 [12.7]	0.41 [10.3]	0.67 [17.0]	0.23 [5.7]	1.19 [30.2]	0.95 [24.1]	0.76 [19.4]

PART NUMBER	WIRE SIZE	WIRE TYPE	WIRE STRIP LENGTH	STUD SIZE	PANDUIT COLOR CODE ON BARREL	PANDUIT DIE INDEX NO. ON BARREL	ALTERNATE INDUSTRY DIE INDEX NO. ON BARREL
LCAXN300-38-6	300 STR/FLEX	STRANDED COPPER: CLASS G, H, I, K, M, LOCOMOTIVE	1-9/16	3/8	RED	P71	(18)

NOTES:

1. MATERIAL: ELECTRO-TIN PLATED HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
2. UL LISTED FOR APPLICATIONS UP TO 35 KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
3. UL TEMPERATURE RATING: 90° C
4. DIMENSIONS IN BRACKETS ARE MILLIMETERS

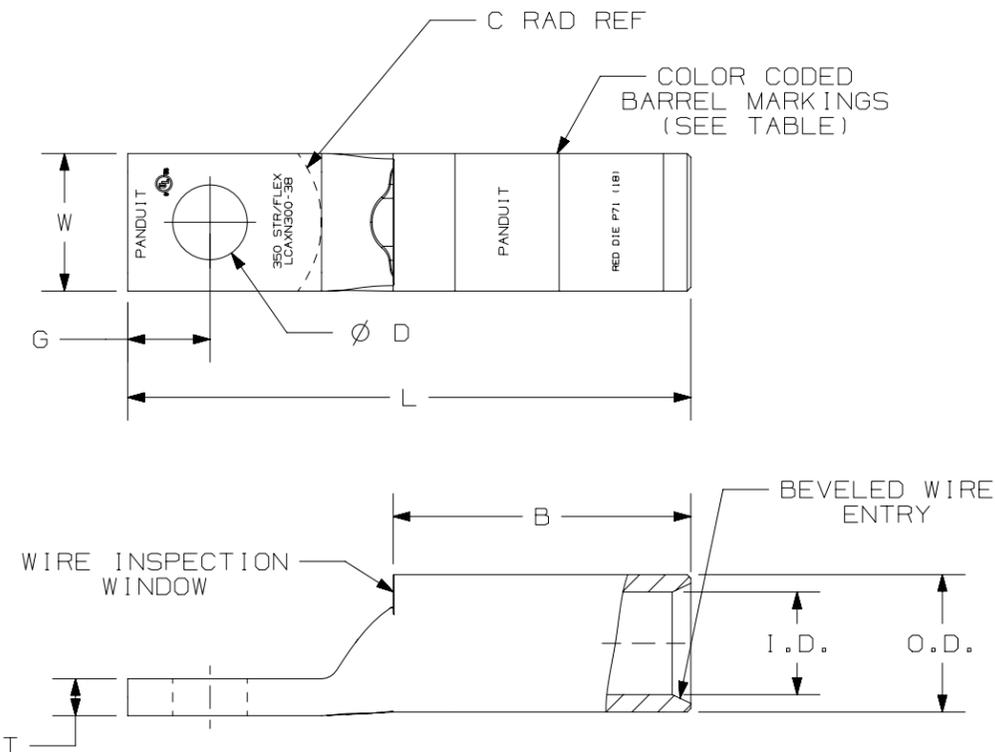

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	5-6-25	JHNU	NMOL	JSUN	DRAWING RELEASED	013070

PART NUMBER		SEE TABLE	
TITLE		LCAXN300 NARROW TONGUE LUGS CUSTOMER DRAWING	
ITEM REVISION NAME		03038NBQ/00	
DATASET FILE NAME		03038NBQ-DC/00A	
MATERIAL		SEE NOTES	
DRAWING NUMBER		03038NBQ-DC	
DRAWN BY	DATE	CHK	SCALE
JHNU	5-6-25	ALP	NONE
SHEET 1 OF 1			SIZE B