



LEFT VIEW



REAR VIEW

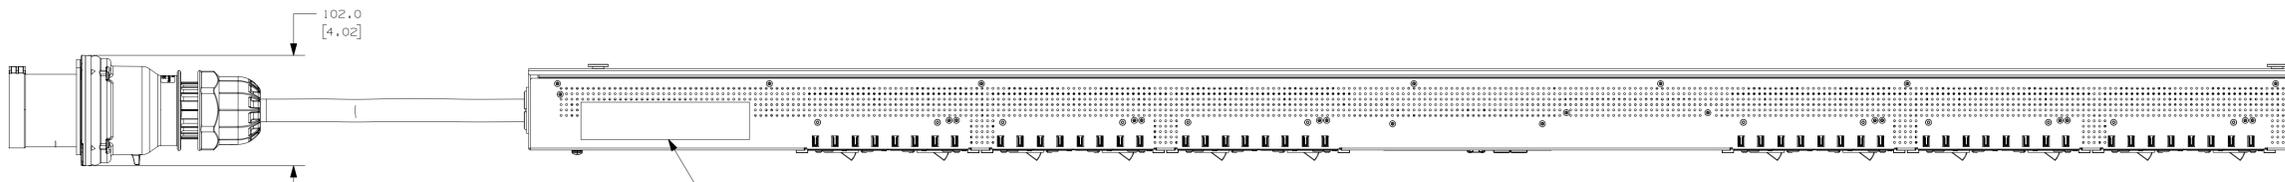

RIGHT VIEW

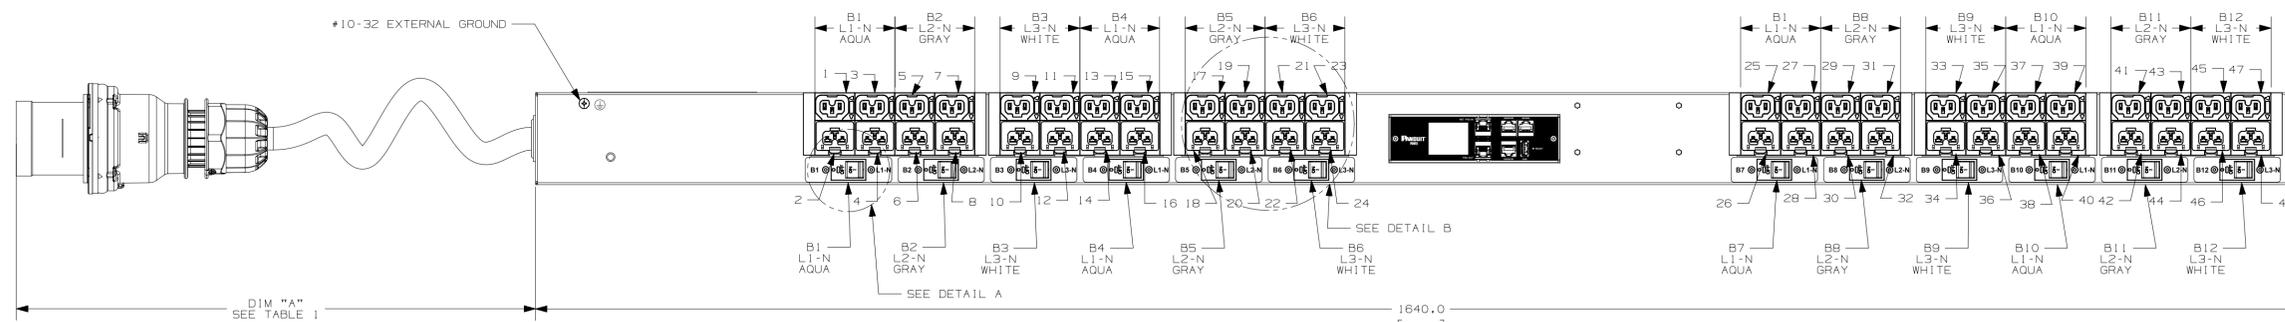

FRONT VIEW

SPECIFICATION


1. STANDARD:
 UNIT TYPE: MS
 ORIENTATION: VERTICAL, 0U FULL
 OUTLET QTY & TYPE: (24)C13/C15, (24)C13/C15/C19/C21
 INPUT VOLTAGE: 200-240/346-415 VAC
 INPUT CURRENT: 60A (48A DERATED) (NA) / 63A (EU)
 BREAKER QTY & TYPE: (12) 20AMP, SINGLE-POLE
 INPUT PHASE: THREE-PHASE WYE, L-N
 RATED POWER: 34.6 kVA (NA) / 43.5 kVA (EU)
 INPUT PLUG: IEC 60309 3P+N+E 6h 63A/60A (1P44)

2. ADDITIONAL:
 CORD TYPE: 5W 6AWG SOOW & 16mm² H07RN-F

3. ACCESSORIES:
 PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN (INCHES)



BOTTOM VIEW


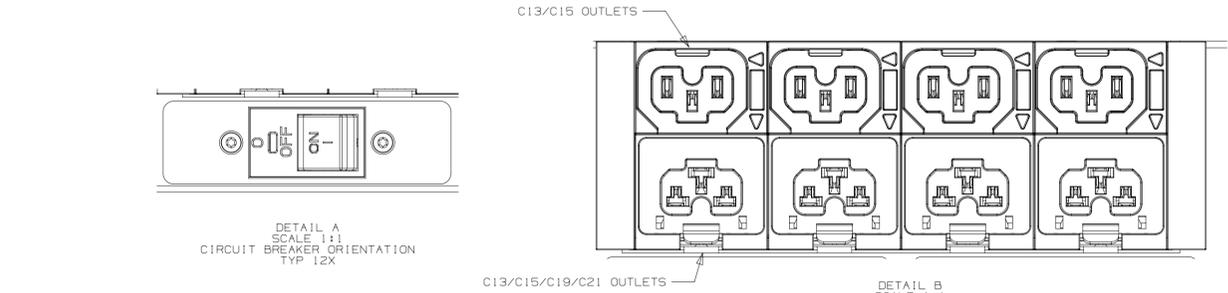


TABLE 1

| PART NUMBER | DESCRIPTION | DIM A | COLOR (-XX) | SHIPPING WEIGHT (KG) |
|-------------|--|-------------------------------|------------------|----------------------|
| E48E25L | EL2P MS PDU, 63/60 AMP, (24)C13/C15, (24)C13/C15/C19/C21, IEC 60309 3P+N+E 6h 63A/60A (1P44) | 3000 +178/-89 [118.1 +7/-3.5] | BLACK (RAL 9005) | 20.3 |



INPUT_PLUG_FRONT_VIEW

PANDUIT
 18900 Panduit Drive, 60487, USA
 www.panduit.com
 SKU #: E48E25L
 Model #: C2Y063C0(EU)/C2Y048C0(NA)
 INPUT: 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 63A(EU), OR 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 48A(NA)
 OUTPUT: C13; 200-240VAC, 10A per outlet
 C19; 200-240VAC, 16A per outlet
 63A Total(EU) OR 48A Total(NA)

Power Distribution Unit

NOM NYCE
 FC CE
 N 50
 62368-1
 CAN ICES-003(A)/NMB-003(A)

Made in China

COMPLIANCE LABEL VIEW

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------------|----------|-----|-----|--|---------|
| 03A | 04/14/2025 | GLM | MJM | MJD | ADDED COMPLIANCE LABEL. UPDATED PLUG VIEW. ADDED CORD TYPE. ADDED WEIGHT. UPDATED DESCRIPTION. ADDED VIEW | E48E25L |
| 02A | 12/12/24 | MEX-JAGC | GLM | MJD | UPDATED VIEWS. ADDED COMPLIANCE LABEL. REMOVED "DOCUMENTATION KIT" FROM ACCESSORIES SECTION. UPDATED INPUT PHASE & FROM STANDARD SECTION. ADDED DIMENSION OF PLUG IN RIGHT VIEW. UPDATED INPUT PLUG SPEC IN STD SECTION. WAS IEC 60309 4P 5W 6H (1P44) | E48E25L |

| | | | |
|----------------------------------|---|------------------|--|
| TITLE E48E25L | | CUSTOMER DRAWING | |
| ITEM REVISION NAME E48E25L/03 | UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± 0.1 IN (1) | | NOT APPLICABLE DRAWING NUMBER: E48E25L-DC SHT 1 OF 2 |
| DRAWN BY DATE GLM 07/10/2024 | CHK MM | SCALE 3:10 | |