

**SPECIFICATION**


- STANDARD: MI  
 UNIT TYPE: VERTICAL, 0U FULL  
 ORIENTATION: (24)C13/C15, (24)C13/C15/C19/C21  
 OUTLET QTY & TYPE: 200-240/346-415VAC  
 INPUT VOLTAGE: 30A (24A DERATED)/32A  
 INPUT CURRENT: (6) 20AMP, SINGLE-POLE  
 BREAKER QTY & TYPE: 3 PHASE WYE, L-N  
 INPUT PHASE: DUAL-RATED:17.3/22KVA  
 RATED POWER: IEC 60309 3P+N+E 6h 30A/32A (IP44)  
 INPUT PLUG: REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL:  
 CORD TYPE:5W 10AWG SOOW & 6mm<sup>2</sup> H07RN-F
- ACCESSORIES:  
 PRODUCT SAFETY WARNING SHEET

**NOTES**


- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
- FOR FULL PRODUCT FUNCTIONLTY REFER TO THE USER MANUAL.




LEFT VIEW

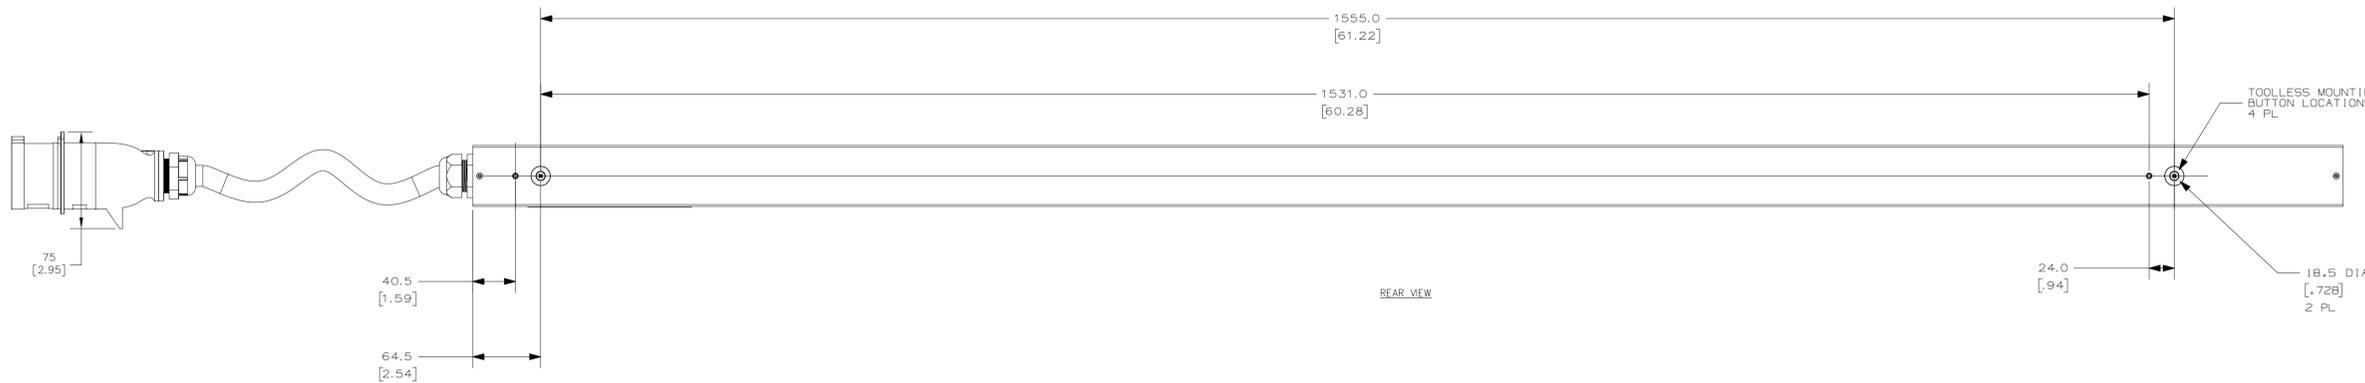


REAR VIEW




RIGHT VIEW

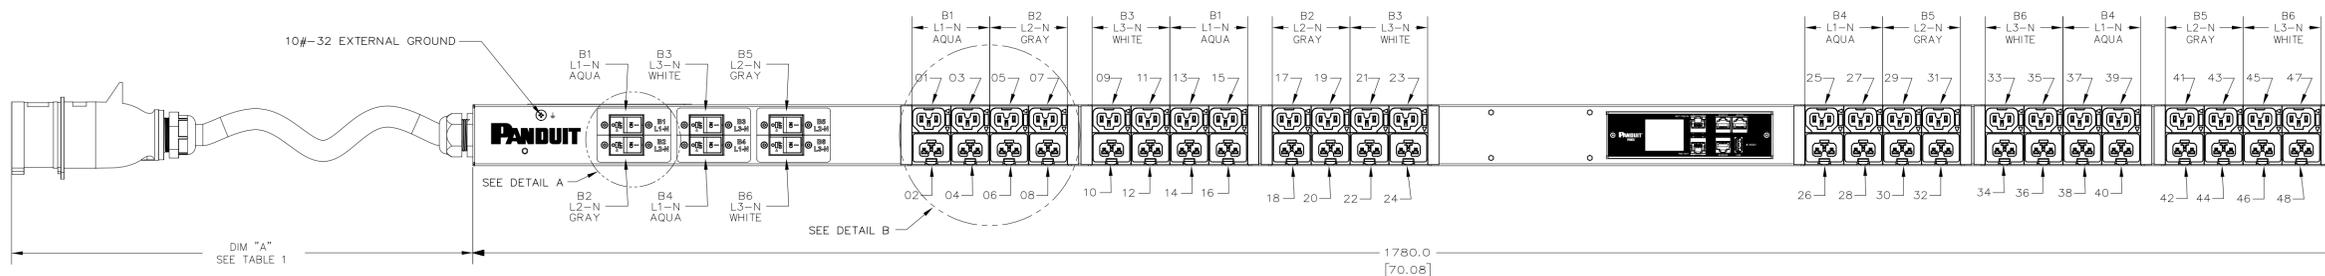


FRONT VIEW



BOTTOM VIEW



DETAIL A  
SCALE 1:1  
CIRCUIT BREAKER ORIENTATION  
TYP 6X

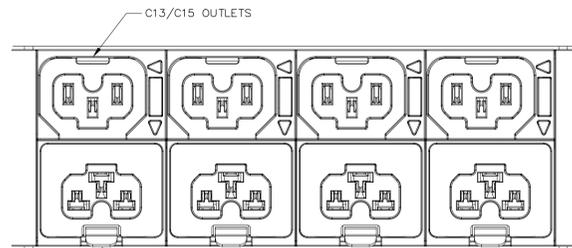


DETAIL B  
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E48D20L	EL2P MI PDU, 32/30AMP, (24)C13/C15, (24)C13/C15/C19/C21 ,IEC 60309 3P+N+E 6h 32A/30A (IP44)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	11.0

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

**PANDUIT**  
 18900 Panduit Drive, 60487, USA  
 www.panduit.com

**Power Distribution Unit**

SKU #: E48D20L-BLSC  
 Model #: B2Y032C0(EU)/B2Y024C0(NA)  
 INPUT: 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 32A(EU), OR 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 24A(NA)  
 OUTPUT: C13: 200-240VAC, 10A per outlet  
 C19: 200-240VAC, 16A per outlet  
 32A Total(EU) OR 24A Total(NA)

NOM NYCE FC CE  
 CAN ICES-003(A)/NMB-003(A)

SKU: E48D20L-BLSC  
 SN: XXXXXXXXXXXX  
 MAC: XXXXXXXXXXXX  
 Made in China

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SCALE	SHT	OF	SIZE
00A	02/20/2025	LLJ	GLM	MJD	RELEASE TO PRODUCTION	E48D20L	3:10	1	1	D