

- SPECIFICATION**
- STANDARD:
 - UNIT TYPE: MSPO
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (24)C13/C15, (24)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 30A (24A DERATED)/32A
 - BREAKER QTY & TYPE: (6) 20AMP, SINGLE-POLE
 - INPUT PHASE: 3 PHASE WYE, L-N
 - RATED POWER: 17.3/22KVA
 - INPUT PLUG: IEC 60309 3P+N+E 6h 30A/32A (IP44)
 - REGULATORY STANDARD: RoHS COMPLIANT
 - ADDITIONAL:
 - CORD TYPE: 5W 10AWG SOOW & 6mm² H07RN-F
 - ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

- NOTES**
- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
 - FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.







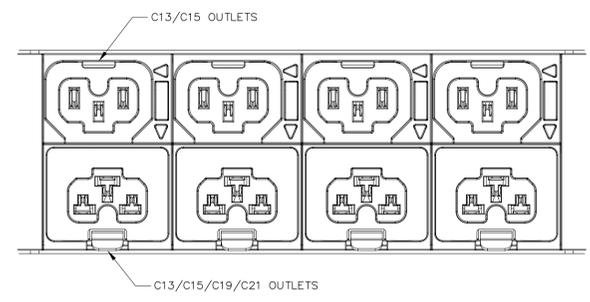


TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E48G30L	EL2P MSPO PDU, 30/32AMP, (24)C13/C15, (24)C13/C15/C19/C21 ,IEC 60309 3P+N+E 6h 30A/32A (IP44)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	11.2

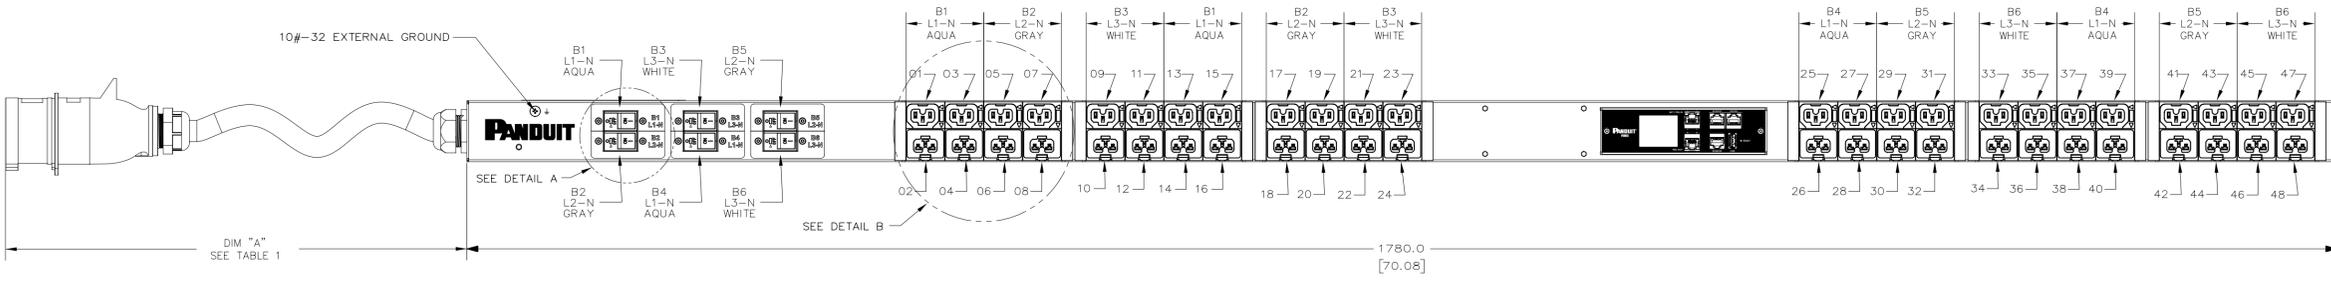

PANDUIT
 18900 Panduit Drive, 60487, USA
 www.panduit.com

Power Distribution Unit

SKU #: E48G30L-BLSC
 Model #: E2Y032C0(EU)/E2Y024C0(NA)
 INPUT: 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 32A(EU), OR 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 24A(NA)
 OUTPUT: C13: 200-240VAC, 10A per outlet
 C19: 200-240VAC, 16A per outlet
 32A Total(EU) OR 24A Total(NA)

62368-1
 CAN ICES-003(A)/NMB-003(A)

NOM NYCE
 FC CE
 MADE IN CHINA

SKU: E48G30L-BLSC
 SN: XXXXXXXXXXXX
 MAC: XXXXXXXXXXXX

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	FILE
02A	02/20/2025	LLJ	GLM	MJD	RELEASE TO PRODUCTION	E48G30L	E48G30L

ITEM REVISION NAME		E48G30L/00	
DATASET FILE NAME		E48G30L-DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		MATERIAL	
DRAWN BY: LLJ		DATE: 02/20/2025	
CHECKED BY: GLM		SCALE: 3:10	
DRAWING NUMBER: E48G30L-DC		SHT 1 OF 1	