

SPECIFICATION

1. STANDARD:
 UNIT TYPE: MS
 ORIENTATION: VERTICAL, OU FULL
 OUTLET QTY & TYPE: (24)C13/C15, (24)C13/C15/C19/C21
 INPUT VOLTAGE: 100-120/200-240VAC
 INPUT CURRENT: 30A (24A DERATED)/32A
 BREAKER QTY & TYPE: (6) 20AMP, SINGLE-POLE
 INPUT PHASE: 3 PHASE WYE, L-N
 RATED POWER: DUAL-RATED:17.3/22KVA
 INPUT PLUG: IEC 60309 3P+N+E 6h 30A/32A (IP44)
 REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:
 CORD TYPE:5W 10AWG SOOW & 6mm² H07RN-F

3. ACCESSORIES:
 PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
 2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.







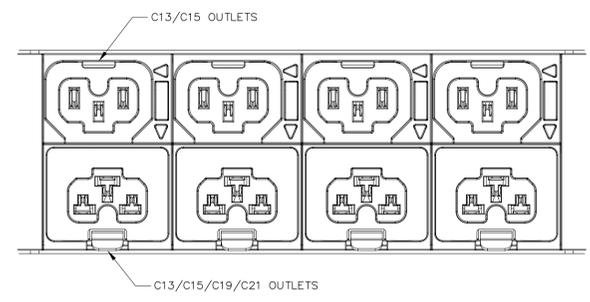


TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E48E20L	EL2P MS PDU, 30/32AMP, (24)C13/C15, (24)C13/C15/C19/C21 ,IEC 60309 3P+N+E 6h 30A/32A (IP44)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	10.2

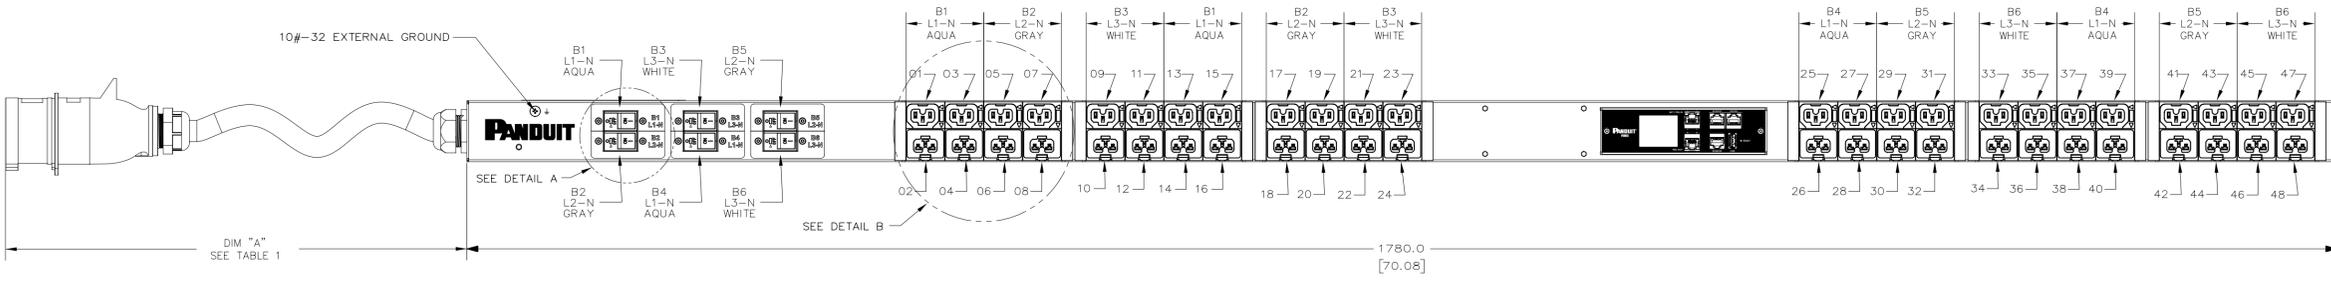

PANDUIT
 18900 Panduit Drive, 60487, USA
 www.panduit.com

Power Distribution Unit

SKU #:E48E20L-BLSC
 Model #: C2Y032C0(EU)/C2Y024C0(NA)
 INPUT: 200-240/348-415VAC, WYE, 3Ø, 50/60Hz, 32A(EU), OR 200-240/348-415VAC, WYE, 3Ø, 50/60Hz, 24A(NA)
 OUTPUT: C13: 200-240VAC, 10A per outlet
 C19: 200-240VAC, 16A per outlet
 32A Total(EU) OR 24A Total(NA)

NOM NYCE
 FC CE
 CAN ICES-003(A)/NMB-003(A)
 Made in China

SKU: E48E20L-BLSC
 SN: XXXXXXXXXXXX
 MAC: XXXXXXXXXXXX

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SCALE	SHT	OF	SIZE
00A	02/06/2025	LLJ	GLM	MJD	RELEASE TO PRODUCTION	E48E20L	3:10	1	1	D