THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



LEFT VIEW

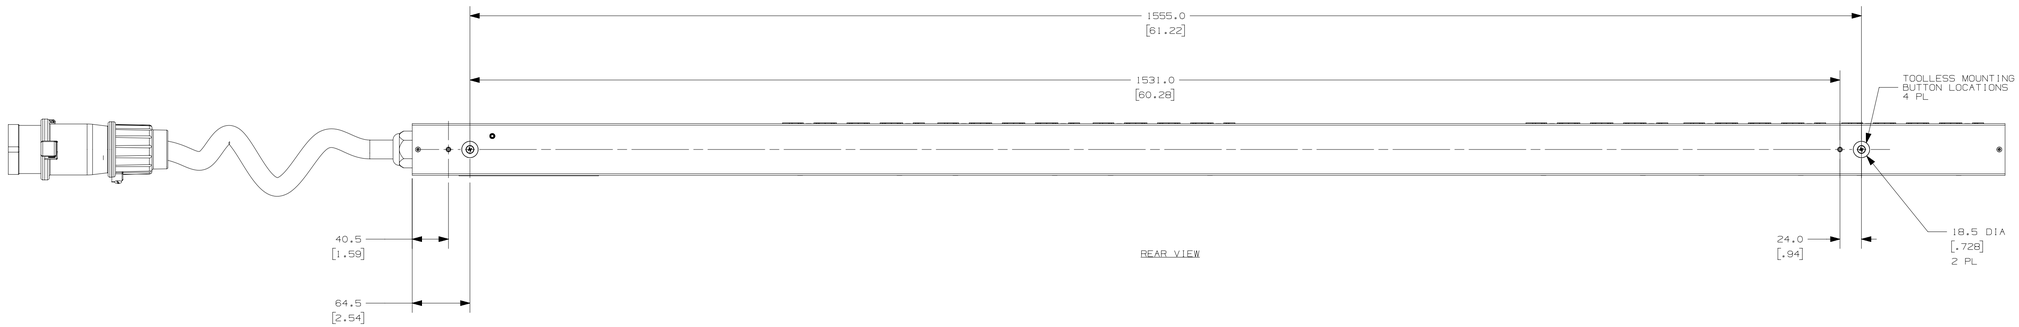


REAR VIEW

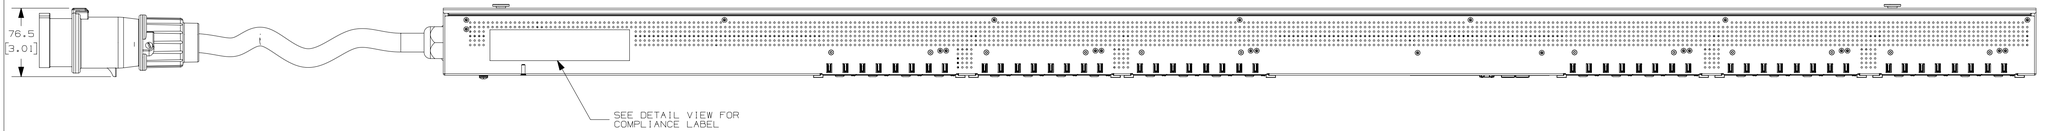


RIGHT VIEW

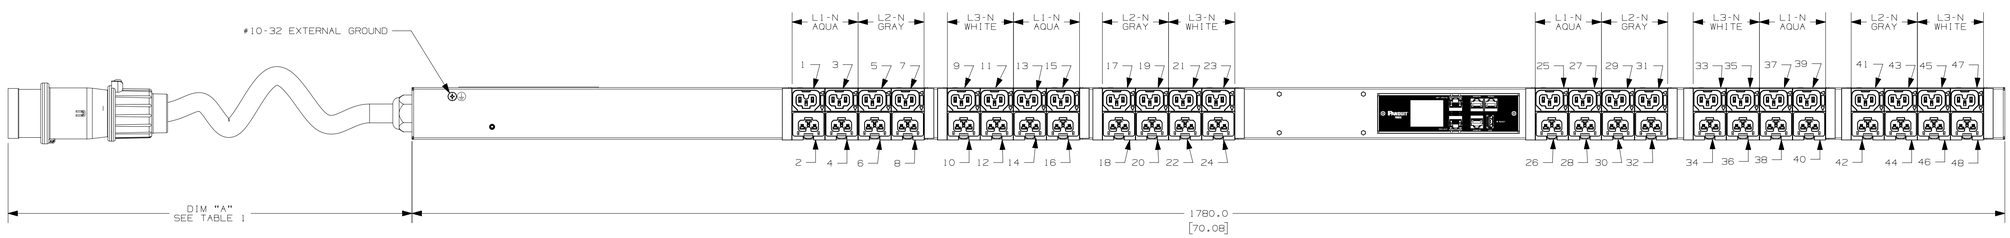


FRONT VIEW




BOTTOM VIEW

SPECIFICATION

1. STANDARD:

| | |
|---|---|
| UNIT TYPE: | MI |
| ORIENTATION: | VERTICAL, OU FULL |
| OUTLET QTY & TYPE: | (24)C13/C15, (24)C13/C15/C19/C21 |
| INPUT VOLTAGE: | 200-240/346-415VAC |
| INPUT CURRENT: | 20A (16A DERATED) |
| BREAKER QTY & TYPE: | N/A |
| INPUT PHASE: | THREE-PHASE WYE (L-N) |
| RATED POWER: | 11.5 (11.0 DERATED) KVA |
| INPUT PLUG: | IEC 60309 3P+N+E 6H 20A/16A (IP44) |

2. ADDITIONAL:
   CABLE TYPE:5W 12AWG SOOW & 2.5mm² H07RN-F

3. ACCESSORIES:
   PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TABLE 1

| PART NUMBER | DESCRIPTION | DIM A | COLOR (-XX) | SHIPPING WEIGHT (KG) |
|---|---|---|---|---|
| E48D23L | EL2P MI PDU, 20/16 AMP, (24)C13/C15, (24)C13/C15/C19/C21, IEC 60309 3P+N+E 6h 20A/16A (IP44) | 3000 +178/-89 [118.1 +7/-3.5] | BLACK (RAL 9005) | 11.6 |

INPUT PLUG FRONT VIEW




COMPLIANCE LABEL VIEW

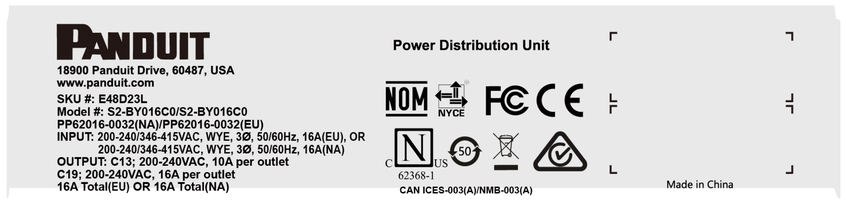


| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 02A | 04/10/2025 | GLM | MIM JHOL | MJD RROD | ADDED COMPLIANCE LABEL, UPDATED PLUG VIEW, ADDED CORD TYPE, ADDED WEIGHT, UPDATED DESCRIPTION | |
| 01B | 12/17/24 | MEX-JAGC | GLM | MJD | UPDATED VIEWS | E48D23L |
| 01A | 10/24/24 | MEX-JAGC | GLM | MJD | DRAWING RELEASE | E48D23L |

TITLE: E48D23L

CUSTOMER DRAWING

ITEM REVISION NAME: E48D23L/02

DATASET FILE NAME: E48D23L-DC/02A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]
0<L<50 ..... +0.5
50<L<250 ..... +1.0
250<L<500 ..... +1.5
500<L<1000 ..... +2.0
1000<L<2000 ..... +4.0
THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: NOT APPLICABLE

DRAWING NUMBER: E48D23L-DC

| DRAWN BY | DATE | CHK | SCALE | SIZE |
|---|---|---|---|---|
| GLM | 09/17/2024 | MIM | 3:10 | D |

SHT 1 OF 1