



LEFT VIEW



REAR VIEW

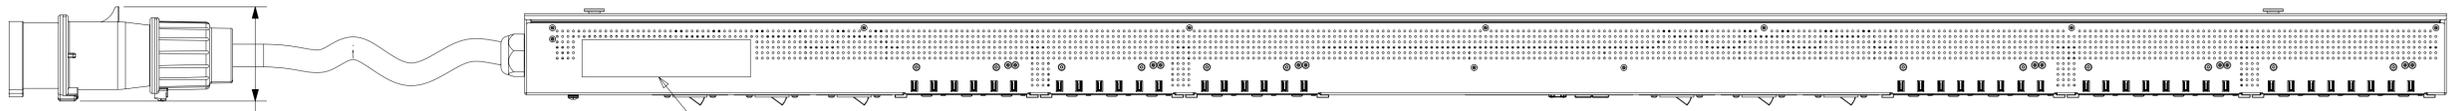

RIGHT VIEW

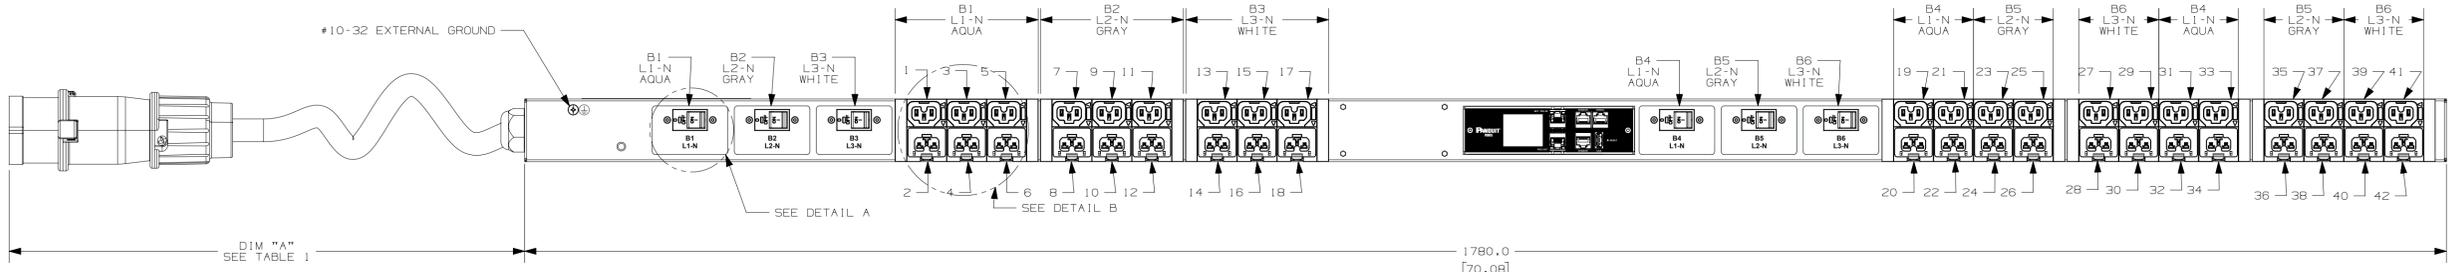


FRONT VIEW

**SPECIFICATION**


- STANDARD:
  - UNIT TYPE: MSPO
  - ORIENTATION: VERTICAL, 0U FULL
  - OUTLET QTY & TYPE: (21)C13/C15, (21)C13/C15/C19/C21
  - INPUT VOLTAGE: 200-240/346-415VAC
  - INPUT CURRENT: 30A (24A DERATED) / 32A
  - BREAKER QTY & TYPE: (6) 20AMP, SINGLE-POLE
  - INPUT PHASE: THREE-PHASE WYE, L-N
  - RATED POWER: 17.3/22.0 KVA
  - INPUT PLUG: IEC 60309 3P+N+E 6h 30A/32A (1P44)
- ADDITIONAL:
  - CORD TYPE: 5W 10AWG 500W & 6MM<sup>2</sup> H07RN-F
- ACCESSORIES:
  - PRODUCT SAFETY WARNING SHEET

**NOTES**


- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN (INCHES)
- HEXAGONS ARE USED FOR COMMUNICATION PURPOSES. CIRCLES ARE USED FOR CRITICAL DIMENSIONS. TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS. SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.



BOTTOM VIEW

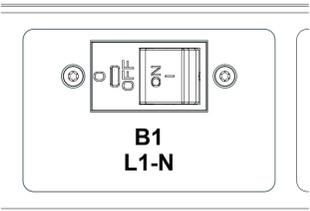

DETAIL A  
SCALE 1:1  
CIRCUIT BREAKER ORIENTATION  
TYP 6X

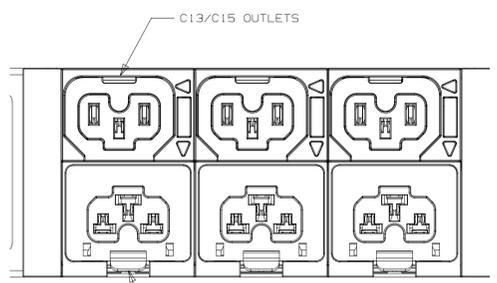


DETAIL B  
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42G05L	EL2P MSPO PDU, 32/30 AMP, (21)C13/C15, (21)C13/C15/C19/C21, IEC 60309 3P+N+E 6h 32A/30A (1P44)	3000 +178/-89 (118.1 +7/-3.5)	BLACK (RAL 9005)	11.8

INPUT\_PLUG\_FRONT\_VIEW



COMPLIANCE\_LABEL\_VIEW

**PANDUIT**  
18900 Panduit Drive, 60487, USA  
www.panduit.com  
SKU #: E42G05L  
Model #: E2Y032C0(EU)/E2Y024C0(NA)  
INPUT: 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 32A(EU), OR 200-240/346-415VAC, WYE, 3Ø, 50/60Hz, 24A(NA)  
OUTPUT: C13; 200-240VAC, 10A per outlet  
C19; 200-240VAC, 16A per outlet  
32A Total(EU) OR 24A Total(NA)

Power Distribution Unit

NOM NYCE FC CE

62368-1 CAN ICES-003(A)/NMB-003(A) Made in China

1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	04/09/2025	GLM	MM JOHL	MJD RR0D	ADDED WEIGHT, ADDED COMPLIANCE LABEL	E42G05L
00A	01/31/2025	GLM	MM JOHL	MJD RR0D	RELEASE FOR PRODUCTION	E42G05L

TITLE: E42G05L  
CUSTOMER DRAWING

ITEM REVISION NAME: E42G05L/01  
DATASET FILE NAME: E42G05L-DC/01A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± 0.13 (1 IN 1)

THIRD ANGLE PROJECTION

DATE: 01/31/2025  
SCALE: 3:10

NOT APPLICABLE

DRAWING NUMBER: E42G05L-DC  
SHT 1 OF 1