


NEW!

ABMQ Multiple Bridge Mount

The ABMQ Multiple Bridge Mount provides a quick and dependable method of supporting, routing, and protecting cables while providing maximum design flexibility. Applying one ABMQ Multiple Bridge Mount gives you the ability to route up to four cable bundles quickly with *PANDUIT* Cable Ties. The large adhesive surface area of the ABMQ provides a secure mounting method for cable bundles. Connecting two or more ABMQ Multiple Bridge Mounts provides more cable routing capabilities for complex electrical systems.

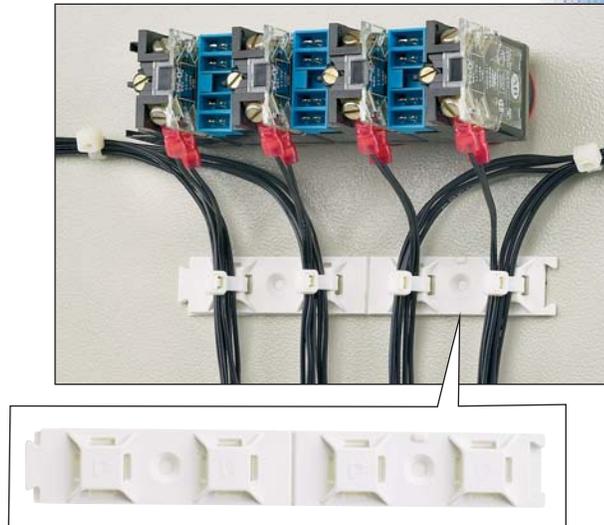


Key Features

Benefits

| | |
|---|--|
| <i>Multiple cable tie bridges on one mount</i> | Speeds installation of cable bundles by reducing the number of mounts applied |
| <i>Dovetail connection system</i> | Provides a joining method to expand routing capabilities |
| <i>V-groove</i> | Allows for easy separation into two mounts with two bridges each for separate applications |
| <i>4-way cable tie bridge</i> | Allows cable bundles to be secured perpendicular to the mount for even spacing or inline to secure a bundle in multiple places |
| <i>Large adhesive surface area</i> | Provides long-term reliability and keeps product in place despite heavy load or high stress |

ABMQ Multiple Bridge Mount

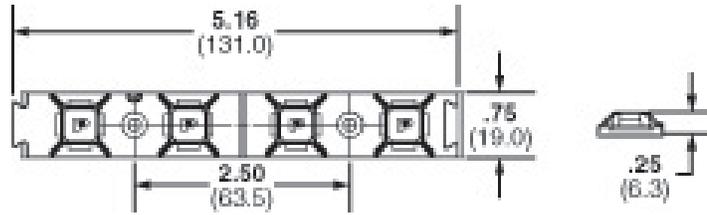

Ordering Information


| Part No. | Used with Cable Ties‡ | Material | Color | Where Used | Mounting Method | Adhesive Static Load lbs. (g) | Std. Pkg. Qty. | Bulk Pkg. Qty. |
|-------------|-----------------------|-----------------------|---------|--------------------|-------------------|-------------------------------|----------------|----------------|
| ABMQS-A-Q | M, I, S | ABS | Natural | Indoors | Rubber Based | 1.9(862) | 25 | 100 |
| ABMQS-A-Q20 | | | Black | | | | | |
| ABMQS-AT-Q | | | Natural | Indoors/High Temp | Acrylic Based | | | |
| ABMQS-AT-Q0 | | Weather Resistant ABS | Black | Outdoors/High Temp | | | | |
| ABMQS-S6-C0 | | | ABS | Natural | Indoors/High Temp | #6 (M3) Screw | — | — |
| ABMQS-S6-C | | | | | | | | |

‡Cable Tie Cross Section Sizes: M = Miniature, I = Intermediate, S = Standard


Proper Installation Techniques




Clean surface with a clean cloth and isopropyl alcohol.




Allow surface to air dry.



Remove the release liner being careful not to touch the adhesive.



Apply full thumb pressure for at least 5 seconds.



Allow mount to properly dwell for two hours.

Related Products

PAN-TY® Cable Ties



- One piece construction for consistent performance and reliability
- Lowest threading force of any one-piece cable tie in the industry
- Versatile cable ties can be used in countless applications
- A wide variety of materials and colors available
- Install by hand or with *PANDUIT* cable tie installation tools

DOME-TOP® Barb Ty Cable Ties



- Stainless steel locking barb provides consistent performance, reliability and infinite adjustability through entire bundle range
- DOME-TOP head features unique patented design with round, smooth edges
- High strength and low thread force
- Install by hand or with *PANDUIT* cable tie installation tools

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.666.2501

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of *PANDUIT* product warranties, log on to www.panduit.com/warranty



For more information or to request a catalog

www.panduit.com

cs@panduit.com • 800-777-3300

©2005 *PANDUIT* Corp.
ALL RIGHTS RESERVED.
Printed in U.S.A.
SA-ELCB05
01/2005