


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	250 kcmil
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Length	1-5/16 in.
Stud Size	5/16 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	YELLOW
Panduit Die Index No. on Barrel	P62
Alternate Industry Die Index No. () on Barrel	(16)



Technical drawing of a wire inspection window. The drawing shows a rectangular component with a circular feature on the left and a curved feature on the right. Dimensions and labels are as follows:

- Overall height: $1.17 \pm .04$
- Overall width: $.35 \pm .04$
- Radius of the circular feature: $.34 \pm .02$ DIA
- Text on the component: PANDUIT, 250 kcmil STR CU, LCA250-56F
- Label: Wire inspection window

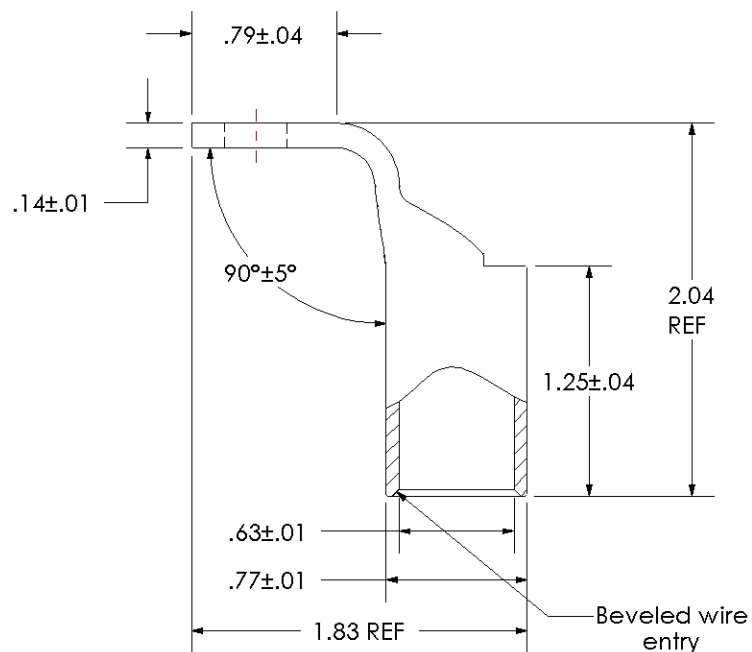

LCA250-56F-X
Copper Lug - One-Hole, Standard Barrel, 90° Angle Tongue

02	7/04	DRL	DRL	ADDED kcmil TO 250 STR CU	11946
----	------	-----	-----	---------------------------	-------

REV	DATE	BY	CHK	DESCRIPTION
-----	------	----	-----	-------------

ECN

SCALE	N/A
-------	-----

DRAWING NO / CAD FILE

LCA250-56F-CUST