

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin 8 AWG Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric 5/8 in.		
Wire Size			
Wire Type			
Wire Strip Length			
Stud Size	1/4 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90° C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	RED		
Panduit Die Index No. on Barrel	P21		
Alternate Industry Die Index No. () on Barrel	N/A		





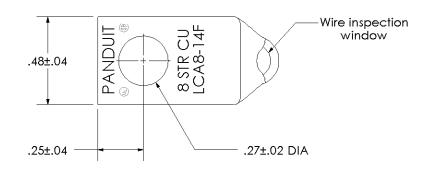

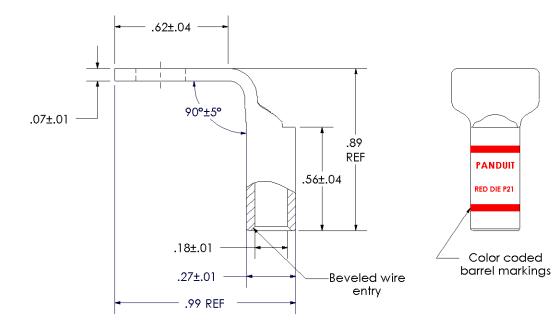

LISTED Wire Connector

						PANDUIT CORP. TINLEY PARK, ILLINOIS
						LCA8-14F-L
01	9/03	DRL	DRL	ADDED UL, CSA AND PART NO. TO STAMP	11074	Copper Lug - One-Hole, Standard Barrel, 90° Angle Tongue
RE\	DATE	BY	снк	DESCRIPTION	ECN	SCALE DRAWING NO / CAD FILE LCA8-14F-CUST