

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin 4/0 STR/FLEX Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive		
Wire Size			
Wire Type			
Wire Strip Length	2-5/16 in.		
Stud Size	3/8 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90° C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	PURPLE		
Panduit Die Index No. on Barrel	P54		
Alternate Industry Die Index No. () on Barrel	(15)		





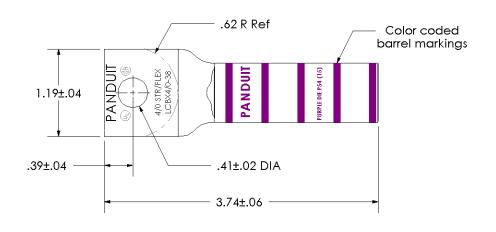

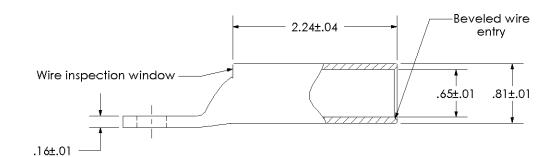

						CORP. TINLEY PARK, ILLINOIS
						LCBX4/0-38-X Copper Lug - One-Hole, Standard Barrel
00	6/03	SAC	SAC	RELEASED	10850	Copper Lug - One-noie, standard barrer
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE DRAWING NO / CAD FILE LCBX4_0-38-CUST