THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

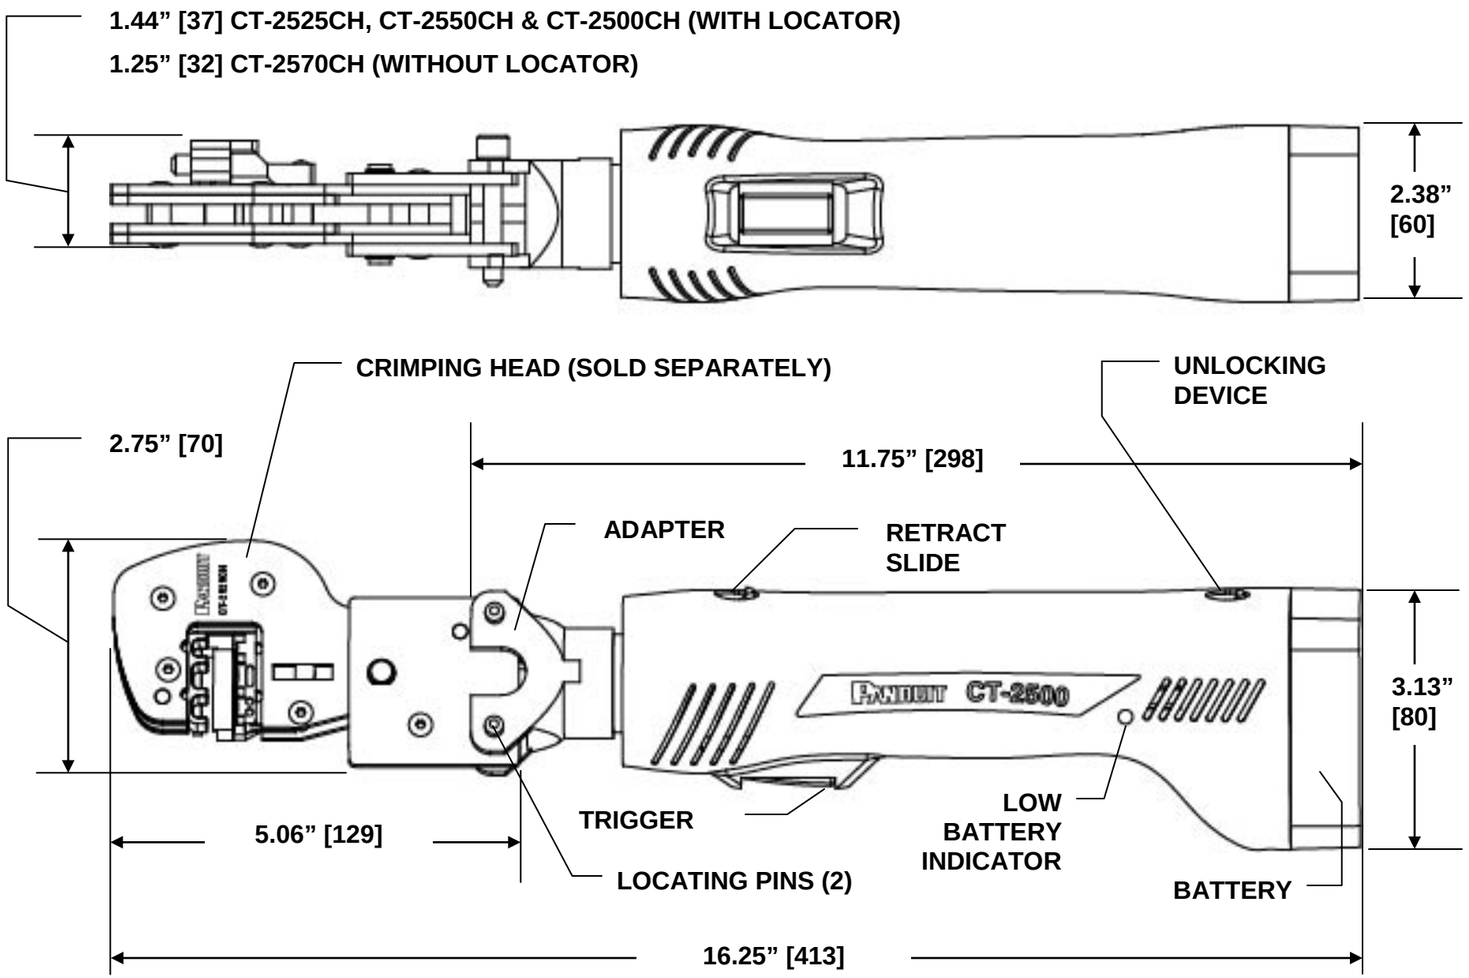

NOTES, UNLESS OTHERWISE SPECIFIED:

The CT-2500 and CT-2500/E Battery Operated Crimping Tools are designed to crimp #10 AWG thru #22 AWG Panduit terminals, disconnects and splices.

The CT-2500 and CT-2500/E Tools include:

- 1 – Battery Operated Crimping Tool (with battery cartridge)
- 1 – Spare Battery Cartridge
- 1 – Battery Charger
- 1 – Tool Case

Weight (including battery)	3.3 lbs. (1,5 kg)
Dimensions:	11-3/4” L x 2-3/8” H x 3-1/8” W – with battery [298 L x 60 H x 80 W] mm
Crimping Time	2 seconds
Crimping Force	1.7 tons (15 kN)

CT-2500 and CT-2500/E Battery Operated Crimping Tools are to be used with optional Crimping Heads: CT-2525CH, CT-2550CH and CT-2500CH, which are supplied with locator (for insulated); and CT-2570CH (for non-insulated), and are sold separately.

The CT-2500CH Crimping Head (frame only) is used with optional Crimping Die Inserts: CD-525, CD-550 and CD-570, which are sold separately.

The operation manual for the CT-2500 and CT-2500/E tools, plus optional crimping heads and die inserts can be found at: www.panduit.com.

Replacement Batteries and Battery Chargers are sold separately.

CT-2500BC	Replacement Battery Cartridge
CT-2500CHR	Replacement Battery Charger
CT-2500CHR/E	Replacement Battery Charger for Europe

Dimensions in [brackets] are in millimeters.
All dimensions are for reference only.

F:\wrkgrp\rvusers\ENGR DOCS\CUSTOMER DRAWINGS\TP25386B01_04 CT-2500_CT-2500-E CD.doc

CT-2500 TOOL BODY SHOWN WITH CT-2525CH CRIMPING HEAD ATTACHED

REV	DATE	BY	CHK’D	DESCRIPTION	ECN	- R	CUST	SUP
04	4-07-14	BLR	BJPU	UPD LOGO	4734		ABJ	
03	1-27-14	BLR	BJPU	UPD BRANDING	4704		ABJ	
02	4-04-08	BLR	BJPU	ADD CT-2500CH & DIE INSERT INFO	4290	---	JRWA	
01	8-01-07	BLR	SRRE	UPD GRAPHIC W/LED	4241	---	JRWA	
00	3-02-07	BLR	SRRE	RELEASED	4241	---	SZ	

PANDUIT CORP. TINLEY PARK, ILLINOIS

CD*CT-2500 & CT-2500/E

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.x) ± ---- (.xxx) ± ----
(.xx) ± ---- ANGLES ± ----

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: BLR
MATL: -----
SCALE: NONE
DATE: 3-02-07
DRAWING NO. TP25386B01
DWG B
CHK’D: SRRE
SIZE