

LCA Impact declaration

Product: name:

UWP40DLBXXX (FIELD BUS)

Site Plant:

via Safforze, 8
32100 – Belluno (BL)

in compliance with ISO 14040-14044 and EN 50693



LCA impacts declaration

UWP40DLBXXX

General information

Company	Gavazzi Controls S.p.A., via Safforze, 8 32100 – Belluno (BL) www.gavazzi-automation.com
Reference production site(s)	Belluno plant: via Safforze, 8, 32100 – Belluno (BL)
Scope of application	This document refers to the device of the Fieldbus family.
CPC Code	46 "Electrical machinery and apparatus"
Company contact	<u>Giampaolo Tormen</u> Certification Manager giampaolo.tormen@gavazziacbu.it
Technical support	 Aequilibria Srl - SB P.le della Stazione, 8 35131 – Padova (PD) - ITALIA
Comparability	Environmental statements published within the same product category, but from different programs, may not be comparable. In particular, LCA impacts of similar products may not be comparable if they do not comply with the relevant Technical Standard.
Reference documents	The EN 50693:2019 standard is the framework reference for PCR "Electronic and electrical products and systems" (PCR EPDItaly007).
PCR – Product Category Rules	Core-PCR: EPDITALY007 "Electronic and electrical product and systems" Rev. 3 of 13/01/2023
Date and revision of this document	01/12/2025 rev.0

Table 1. General information

LCA impacts declaration

UWP40DLBXXX

Foreword

This document represents the LCA DECLARATION study conducted for the **UWP40DLBXXX** device manufactured by Carlo Gavazzi Controls S.p.A., in accordance with ISO 14040-14044 and aimed at providing a tool for the development, verification and publication of Environmental Product Declarations.

The study was carried out in accordance with PCR EPDItaly007 (*PCR for electronic and electrical products and systems*), which identifies and documents the objective and scope of LCA-based information for the product category, the rules for producing additional environmental information, the life cycle stages to be included, the parameters to be addressed, and the manner in which the parameters are to be collected and communicated in a report.

Producer information and environmental policy

Carlo Gavazzi Controls SpA develops, manufactures and markets monitoring relays, Fieldbus, energy management systems, fieldbus systems, providing solutions for the industrial, residential and commercial automation markets, in the field of low voltage installations.

The products are marketed in Europe, North America and Asia-Pacific through a network of 22 own sales companies and about 60 independent national distributors. Carlo Gavazzi Controls has a production plant in Belluno (via Safforze 8, 32100 – Belluno).

The company already holds the following certifications, issued by accredited bodies:

- ISO9001 (since 1997)
- ISO14001 (since 2009)

Carlo Gavazzi Controls is committed to continuously reducing the environmental impact of its products throughout their life cycle, through the implementation of an environmentally conscious design process based on the principles of the EN 62430 standard and an ISO14001 certified environmental management system. The declared environmental claims have been assessed with a qualitative approach on the environmentally conscious design process.

LCA impacts declaration

UWP40DLBXXX

Product Information

The product under analysis is device **UWP40DLBXXX**, belonging to the Fieldbus family, nominal consumption 5.5 W (0.0055 kW), weight 212 g (0.212 kg) including packaging and manual. The adopted functional unit was defined, based on the reference PCR, as **a device, characterized by its own operating power at 0.0055 kW for a life time (RSL - Reference Service Life") of 10 years, including its packaging, and operating throughout its useful life.**

The assembly and testing of the product are carried out at the Carlo Gavazzi Controls production site.

Regarding the use phase, the product does not require periodic maintenance, it is considered continuously active throughout its estimated useful life of **10 years**, with a nominal consumption of 5.5 W at a voltage of 24 VDC.

The finished device is then sent to the various Gavazzi distribution centers or, in some cases, directly to a specific customer.

Product family	Fieldbus	
Product identification number	UWP40DLBXXX	
Technical Data	Power: 5.5 W (0.0055 kW) Frequency: VCC Weight: 0.15623 kg (packaging excluded) Service Life Time (RLS): 10 years Current Intensity: $I_n = n.a.$, $I_{max} = n.a.$	
Packaging	Weight: 0.04392 kg (43.92 g) Material: Paper and Cardboard	

Table 2. Product related information UWP40DLBXXX

LCA impacts declaration

UWP40DLBXXX

Materials and constituents of the product

The declaration of materials is made in accordance with EN IEC 62474.

The products comply with substance restrictions in the EU RoHS directive (2011/65/EU).

Any recycled material content in the device is unknown.

Below is the total mass of the product (including packaging) and the weight percentages of each individual raw material to the total product.

Total mass of the device	0,212 kg (including packaging)
--------------------------	---------------------------------------

Raw Material Category SCLAM	SCLAM	SCLAM description	% of total weight	% of category to total weight
PCB	PCB-SEM	Printed circuit boards semplici (fino a due strati)	1.52%	24.67%
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	1.50%	
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	4.54%	
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	2.70%	
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	4.55%	
	PCB-COM	Printed circuit boards complessi (piu di due strati)	4.90%	
	PCB-SEM	Printed circuit boards semplici (fino a due strati)	4.97%	
Electronic Components	VARIP	PTH - Varistors	0.231%	13.173%
	RESTD	Resistors	0.156%	
	CNTRS	Connectors	0.270%	
	RESMD	SMD Resistors	0.005%	
	SWSMD	SMD - Switches and tact switches	0.026%	

LCA impacts declaration

UWP40DLBXXX

DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.002%
CNTRS	Connectors	0.074%
CNTRS	Connectors	0.036%
DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.001%
CNTRS	Connectors	3.425%
CNTRS	Connectors	1.146%
RESMD	SMD Resistors	0.000%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.001%
RESMD	SMD Resistors	0.004%
RESMD	SMD Resistors	0.001%
RESMD	SMD Resistors	0.001%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.004%
CCERS	SMD - Ceramic capacitors	0.009%
CCERS	SMD - Ceramic capacitors	0.009%
CCERS	SMD - Ceramic capacitors	0.002%
CCERS	SMD - Ceramic capacitors	0.002%
CCERS	SMD - Ceramic capacitors	0.002%
CCERS	SMD - Ceramic capacitors	0.011%
CCERS	SMD - Ceramic capacitors	0.017%
DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.003%
ICSMD	SMD - Integrated circuits	0.017%
ICSMD	SMD - Integrated circuits	0.008%
ICSMD	SMD - Integrated circuits	0.020%
MICRO	Microprocessors	1.538%
CNTRS	Connectors	0.387%
CNTRS	Connectors	0.156%
CNTRS	Connectors	0.094%
CNTRS	Connectors	0.236%
INDCS	SMD - Inductors	0.019%
CCERS	SMD - Ceramic capacitors	0.147%
CCERS	SMD - Ceramic capacitors	0.005%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.001%

LCA impacts declaration

UWP40DLBXXX

CNTRS	Connectors	0.318%
CNTRS	Connectors	0.074%
CNTRS	Connectors	0.254%
RESMD	SMD Resistors	0.003%
RESMD	SMD Resistors	0.005%
RESMD	SMD Resistors	0.004%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.004%
RESMD	SMD Resistors	0.009%
QUSMD	SMD - Quartzes and crystal resonators	0.008%
CCERS	SMD - Ceramic capacitors	0.009%
CCERS	SMD - Ceramic capacitors	0.020%
CCERS	SMD - Ceramic capacitors	0.042%
CTANS	SMD - Tantalum capacitors	0.099%
DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.004%
CNTRS	Connectors	0.222%
CNTRS	Connectors	0.073%
CNTRS	Connectors	0.311%
INDCS	SMD - Inductors	0.001%
CCERS	SMD - Ceramic capacitors	0.031%
CCERS	SMD - Ceramic capacitors	0.005%
CCERS	SMD - Ceramic capacitors	0.003%
RESMD	SMD Resistors	0.000%
RESMD	SMD Resistors	0.003%
RESMD	SMD Resistors	0.005%
RESMD	SMD Resistors	0.003%
RESMD	SMD Resistors	0.004%
RESMD	SMD Resistors	0.004%
RESMD	SMD Resistors	0.008%
RESMD	SMD Resistors	0.006%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.004%
RESMD	SMD Resistors	0.005%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.002%
RESMD	SMD Resistors	0.008%

LCA impacts declaration

UWP40DLBXXX

	QUSMD	SMD - Quartzes and crystal resonators	0.009%	
	CCERS	SMD - Ceramic capacitors	0.006%	
	CCERS	SMD - Ceramic capacitors	0.002%	
	CCERS	SMD - Ceramic capacitors	0.031%	
	DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.013%	
	DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.004%	
	DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.140%	
	ICSMD	SMD - Integrated circuits	0.005%	
	ICSMD	SMD - Integrated circuits	0.038%	
	ICSMD	SMD - Integrated circuits	0.031%	
	MICRO	Microprocessors	0.011%	
	CNTRS	Connectors	0.467%	
	INDCS	SMD - Inductors	1.122%	
	INDCS	SMD - Inductors	0.383%	
	CCERS	SMD - Ceramic capacitors	0.018%	
	CCERS	SMD - Ceramic capacitors	0.017%	
	CCERS	SMD - Ceramic capacitors	0.208%	
	CCERS	SMD - Ceramic capacitors	0.074%	
	CCERS	SMD - Ceramic capacitors	0.491%	
	CCERS	SMD - Ceramic capacitors	0.001%	
	CCERS	SMD - Ceramic capacitors	0.004%	
	RESMD	SMD Resistors	0.003%	
	RESMD	SMD Resistors	0.004%	
	RESMD	SMD Resistors	0.009%	
	CCERS	SMD - Ceramic capacitors	0.005%	
	DDSMD	SMD - Diodes, zeners, leds, transils, rectifier bridges	0.004%	
	CNTRS	Connectors	0.311%	
	INDCS	SMD - Inductors	0.001%	
	CCERS	SMD - Ceramic capacitors	0.001%	
	CCERS	SMD - Ceramic capacitors	0.002%	
	ICDIL	DIL - Integrated circuits	0.123%	
Sclam product specific	BATTR-LIB	Battery type Li Metal, button	0.79%	2.62%
	TBCUS	Custom terminal blocks	1.03%	
	TBCUS	Custom terminal blocks	0.34%	
	LEDXX	Leds - no infrared	0.00%	

LCA impacts declaration

UWP40DLBXXX

	LEDXX	Leds - no infrared	0.00%	
	LEDXX	Leds - no infrared	0.00%	
	OPTOX	Optocouplers	0.23%	
	OPTOX	Optocouplers	0.23%	
Cables	CABLE-PVC	Cables, sleeves and wirings PVC	16%	16%
Small metallic parts	MECUS-OT	Custom metal parts ottone	3.06%	4.45%
	MECUS-ST	Custom metal parts steel	1.40%	
Plastics	PLCUS-NO	Custom parts Noryl	4.80%	20.08%
	PLCUS-NO	Custom parts Noryl	4.30%	
	PLCUS-NO	Custom parts Noryl	4.28%	
	PLCUS-NO	Custom parts Noryl	3.33%	
	PLCUS-HO	Custom parts Hostaform	0.41%	
	PLCUS-NO	Custom parts Noryl	0.45%	
	PLCUS-NO	Custom parts Noryl	0.22%	
	LAFRO-PC	Frontal labels	0.14%	
	LAFRO-PC	Frontal labels	0.05%	
	LAPAC	Packaging labels	1.03%	
	PLBAG	Plastic bags	1.08%	
Paper primary packaging	BOXES	Carton boxes	15.52%	26.92%
	BOXES	Carton boxes	3.20%	
	SHEET	Instruction sheets/ manuals	2.00%	
	SHEET	Instruction sheets/ manuals	4.06%	
	SHEET	Instruction sheets/ manuals	0.92%	
	SHEET	Instruction sheets/ manuals	1.22%	

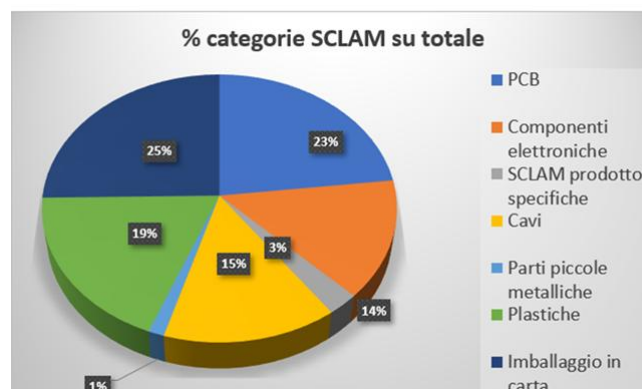


Figure 1. Material breakdown of the **UWP40DLBXXX** device

LCA impacts declaration

UWP40DLBXXX

Information related to the study

System boundaries	The boundaries of the study system are “ cradle-to-grave ”.
Geographical validity	Global
Reference year data	2023
Reference tool	This LCA DECLARATION was generated using the results automatically generated by the Excel tool “LCA tool_dati 2023_GAV – rev4” of 15/11/2024

Table 4. Information related to the study

The assessment of all potential environmental impacts above is based on the entire life cycle of the product under analysis: production, distribution, installation, use and end of life.

The elements and processes considered for the assessment of impacts related to each phase are described below:

Production	• Product and packaging raw materials (primary and secondary), auxiliary materials and related transportation • production and processing processes (involving energy and water consumption, air emissions, waste generated by production) - Electricity Dataset elettricità: <i>Electricity, medium voltage {LT} electricity, medium voltage, residual mix Cut-off (Ecoinvent 3.10)</i>																		
Distribution	• transportation from the Gavazzi plant to the latest distribution logistics platforms <table><tr><th colspan="3">FINISHED PRODUCT DISTRIBUTION (CoD)</th></tr><tr><th>Distribution center finished product</th><th>% distributed to the CoD</th><th>Further distribution at the continental level?</th></tr><tr><td>CGC-CdD Italia</td><td>25%</td><td>yes</td></tr><tr><td>CGC-CdD USA</td><td>25%</td><td>yes</td></tr><tr><td>CGC-CdD Canada</td><td>25%</td><td>yes</td></tr><tr><td>CGC-CdD Singapore</td><td>25%</td><td>yes</td></tr></table>	FINISHED PRODUCT DISTRIBUTION (CoD)			Distribution center finished product	% distributed to the CoD	Further distribution at the continental level?	CGC-CdD Italia	25%	yes	CGC-CdD USA	25%	yes	CGC-CdD Canada	25%	yes	CGC-CdD Singapore	25%	yes
FINISHED PRODUCT DISTRIBUTION (CoD)																			
Distribution center finished product	% distributed to the CoD	Further distribution at the continental level?																	
CGC-CdD Italia	25%	yes																	
CGC-CdD USA	25%	yes																	
CGC-CdD Canada	25%	yes																	
CGC-CdD Singapore	25%	yes																	

LCA impacts declaration

UWP40DLBXXX

	• disposal of secondary packaging
Installation	• End of life of primary packaging.
Use and maintenance phase	• Product Category: Fieldbus • usage scenario: 10-year service life, continuous operation at 100% rated load, rated power 5.5 W.
End of life	• Device End of Life Scenario (WEEE).

Table 5. Processes considered at various stages of the study

The LCA study was carried out according to ISO 14040/14044 standards, following the guidelines of IS EN 50693:2019.

The software used for impact assessment is SimaPro; Ecoinvent 3.10 database.

The methods used to calculate impacts refer to the CML baseline and IPCC method for the climate change impact category.

Site-specific data were used for all of the following processes:

- production and transportation of device raw materials, auxiliary materials and packaging materials;
- manufacturing processes, plant energy consumption, air emissions and waste;
- weight, power of the device;
- transportation to the distribution center (last logistics platform).

Generic data were used for:

- recycling, energy recovery and disposal rates for primary and secondary packaging materials and WEEE (global data).

Default scenarios described in PCR 007 were used for:

- transportation to the point of sale: intercontinental and local transportation scenario;
- Lifetime (RLS) of the device: **10** years.

LCA impacts declaration

UWP40DLBXXX

Environmental impact assessment

The potential environmental impacts assessed through an LCA of the **UWP40DLBXXX** device are given in Table 6 below. Impacts were calculated using SimaPro Developer software and the Ecoinvent 3.10 database.

ENVIRONMENTAL IMPACT								
Impact indicators	Unit of measurement	PRODUCTION phase		DISTRIBUTION phase	INSTALLATION Phase	Use and Maintenance Phase	END OF LIFE phase	TOTAL
		UPSTREAM module	CORE module	DOWNSTREAM module				
GWP (TOT)	kg CO2 eq	1.04E+01	1.87E+00	2.32E-01	3.97E-03	2.64E+02	4.11E-02	2.76E+02
GWP - Fossil	kg CO2 eq	1.04E+01	1.89E+00	2.30E-01	2.25E-03	2.63E+02	4.11E-02	2.76E+02
GWP - Biogenic	kg CO2 eq	-3.00E-02	-1.27E-02	2.86E-03	1.72E-03	7.23E-01	-1.49E-05	6.85E-01
GWP - Luluc Land use and Land use change	kg CO2 eq	1.75E-02	4.88E-04	4.40E-05	3.16E-06	5.89E-02	1.90E-05	7.70E-02
ODP (Ozone depletion)	kg CFC11 eq	4.24E-07	4.42E-08	3.84E-09	2.04E-11	4.47E-06	1.05E-10	4.95E-06
AP (Acidification)	mol H+ eq	1.01E-01	5.40E-03	9.09E-04	5.81E-06	1.11E+00	5.63E-05	1.22E+00
EP (Eutrophication, freshwater)	kg P eq	1.43E-02	2.55E-04	8.78E-06	1.92E-07	1.14E-01	3.33E-06	1.29E-01
EP (Eutrophication, marine)	kg N eq	1.56E-02	1.10E-03	3.52E-04	2.33E-06	1.98E-01	1.74E-05	2.15E-01
EP (Eutrophication, terrestrial)	mol N eq	1.68E-01	1.15E-02	3.84E-03	2.43E-05	1.96E+00	1.72E-04	2.14E+00
POCP (Photochemical ozone formation)	kg NMVOC eq	5.05E-02	5.60E-03	1.32E-03	8.17E-06	6.53E-01	5.10E-05	7.10E-01
ADPE (Resource use, minerals and metals)	kg Sb eq	3.79E-03	2.79E-06	3.53E-07	3.14E-09	2.04E-03	6.45E-08	5.83E-03
ADPF (Resource use, fossils)	MJ	1.36E+02	3.13E+01	3.09E+00	1.70E-02	5.21E+03	1.29E-01	5.38E+03
WDP (Water use)	m3 depriv.	2.71E+00	4.59E-01	8.30E-03	3.26E-04	4.42E+01	1.75E-03	4.74E+01

Table 6. Results for various environmental impact categories for device UWP40DLBXXX

LCA impacts declaration

UWP40DLBXXX

USE OF RESOURCES								
Impact indicators	Unit of measurement	PRODUCTION phase		DISTRIBUTION phase	INSTALLATION Phase	Use and Maintenance Phase	END OF LIFE phase	Total
		UPSTREA M module	CORE module	DOWNSTREAM module				
PENRE	MJ	1.36E+02	3.12E+01	3.09E+00	1.70E-02	5.21E+03	1.29E-01	5.38E+03
PENRM	MJ	9.80E-02	1.42E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.40E-01
PENRT	MJ	1.36E+02	3.15E+01	3.09E+00	1.70E-02	5.21E+03	1.29E-01	5.39E+03
PERE	MJ	1.47E+01	-1.95E-01	3.05E-02	2.49E-04	3.19E+02	1.05E-02	3.34E+02
PERM	MJ	8.81E-01	1.02E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.90E+00
PERT	MJ	1.55E+01	8.27E-01	3.05E-02	2.49E-04	3.19E+02	1.05E-02	3.36E+02
FW (Net use of fresh water)	m3	9.24E-02	1.37E-02	2.82E-04	8.57E-06	3.58E+00	6.24E-05	3.69E+00
MS (use of secondary materials)	kg	7.77E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.77E-04
RSF (use of renewable secondary fuels)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF (Use of non-renewable secondary fuels)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Legend: **PENRE** = Use of non-renewable primary energy resources excluding non-renewable primary energy resources used as raw materials; **PENRM** = Use of non-renewable primary energy resources as raw materials; **PENRT** = Total use of non-renewable primary energy resources; **PERE** = Use of renewable primary energy resources excluding renewable primary energy resources used as raw materials; **PERM** = Use of renewable primary energy resources as raw materials; **PERT** = Total use of renewable primary energy resources.

Table 7. Environmental impacts related to resource consumption for the UWP40DLBXXX device.

LCA impacts declaration

UWP40DLBXXX

WASTE PRODUCTION								
Impact indicators	Unit of measurement	PRODUCTION phase		DISTRIBUTION phase	INSTALLATION Phase	Use and Maintenance Phase	END OF LIFE phase	TOTAL
		UPSTREAM module	CORE module	DOWNSTREAM module				
Hazardous waste disposal (HWD)	kg	7.96E-03	7.33E-04	9.38E-04	5.46E-04	1.62E-01	2.54E-03	1.75E-01
Non-hazardous waste disposal (NHWD)	kg	4.66E-01	6.52E-02	9.13E-02	2.65E-02	2.65E-02	3.77E-03	6.79E-01
Radioactive waste disposal (RWD)	kg	2.79E-04	1.79E-05	6.03E-07	3.70E-09	3.70E-09	1.99E-07	2.97E-04
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	3.84E-03	2.36E-03	0.00E+00	0.00E+00	6.20E-03
Materials for recycling (MFR)	kg	0.00E+00	3.82E-02	1.94E-02	2.66E-02	0.00E+00	3.46E-02	1.19E-01
Components for reuse (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE (exported thermal energy)	MJ	0.00E+00	0.00E+00	1.09E-02	6.73E-03	0.00E+00	0.00E+00	1.77E-02
EEE (exported electricity energy)	MJ	0.00E+00	0.00E+00	5.33E-03	3.28E-03	0.00E+00	0.00E+00	8.62E-03

Table 8. Waste-related environmental impacts for the **UWP40DLBXXX** device.

LCA impacts declaration

UWP40DLBXXX

References

- ❖ ISO 14040:2021 Environmental management - Life cycle assessment - Principles and framework
- ❖ ISO 14044:2021 Environmental management - Life cycle assessment - Requirements and guidelines
- ❖ ISO 14020:2000 Environmental labels and declarations - General principles
- ❖ EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems
- ❖ Core-PCR: EPDITALY007 " Electronic and electrical product and systems" Rev. 3 of 13/01/2023