
 TECHNICAL DATA SHEET

Ferrules, covered

Reduced width, metric

Spec-Kon®



Polypropylene covered ferrules are thin-walled copper tubes, which are mechanically crimped onto the ends of stranded wires.

Application:

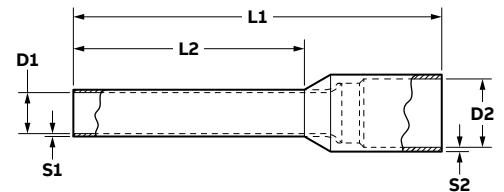
- Polypropylene covered ferrules with reduced width for copper conductors ranging in size from 2.5 to 10 mm²
- Tools
 - ERG4
 - FER9500
 - FER9501

Color designation:

- Part nos. ending in “D” use DIN standard colors
- Part nos. ending in “F” use French standard colors
- Part nos. ending in “G” use German standard colors

Material:

- Ferrule, tin-plated copper
- Cover, polypropylene

Ferrules, covered
 Reduced width, metric


Product selection

Part no:	Wire size (mm ²)	Color	Dimensions (mm)						Tool 1	Tool 2	Tool 3
			D1	D2	L1	L2	S1	S2			
FER2508P-WD	2.5	Blue	2.2	4	14	8	0.15	0.15	ERG4	FER9500	FER9501
FER2508P-WF	2.5	Gray	2.2	4	14	8	0.15	0.15	ERG4	FER9500	FER9501
FER2508P-WG	2.5	Blue	2.2	4	14	8	0.15	0.15	ERG4	FER9500	FER9501
FER4012P-WG	4	Gray	2.8	4.7	20	12	0.2	0.3	ERG4	FER9500	FER9501
FER10012P-WG	10	Ivory	4.5	7.1	22	12	0.2	0.4	ERG4	FER9500	FER9501

Note: Product must be installed in accordance with applicable national and local electrical codes.