Product Environmental Profile

M173 Optimized Logic Controller






General information

Reference product	M173 Optimized Logic Controller - TM173ODEM22R
Description of the product	M173 Optimized is the logic controllers range for simple and compact machines, also available for flush mounting. TM173ODEM22R is a PLC with specific hardware and software functions to control HVAC machines and pumping devices.
Description of the range	The products of the range are: New range of programmable controllers for HVAC/R applications, sharing the same hardware platform. The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To control HVAC/R applications, like chiller, heat pump or pumping station with up to 2 circuits and 4 compressors thanks to the integrated valve driver and 22 programmable IOs, and a 100% of the time for 10 years.
Specifications are:	Technical Data: 1 CAN Expansion Bus 1 display port - TTL connector 2 RS485 1 USB type C 6 digital input 5 digital output 7 analog input 4 analog output 1 unipolar valve driver

Constituent materials

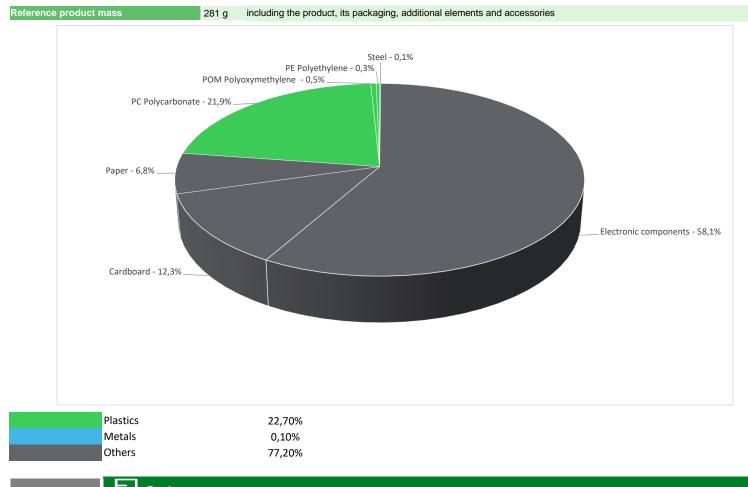

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric website https://www.se.com

(1) Additional environmental information

```
End Of Life
```

Recyclability potential: 0,05%

The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

C Environmental impacts

Reference service life time	10 years							
Product category	Other equipments - Active product							
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study							
Electricity consumtion	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligable consumption							
Installation elements	The installation requires cables							
Use scenario	The product is in active mode 100% of the time v	with a real power use of 11,4 W,	for 10 years					
Time representativeness	The collected data are representative of the year	2024						
Technological representativeness	The Modules of Technologies such as material p EIME in the case) are Similar and Representative			sed in the PEP analysis (LCA				
Geographical representativeness	Rest of the World							
	[A1 - A3]	[A5]	[B6]	[C1 - C4]				
		Electricity Mix; Low voltage; 2020; Europe, EU-27	Electricity Mix; Low voltage; 2020; Europe, EU-27	Electricity Mix; Low voltage; 2020; Europe, EU-27				
Energy model used	Electricity Mix; Low voltage; 2020; Italy, IT	Electricity Mix; Low voltage; 2020; Asia Pacific, APAC	Electricity Mix; Low voltage; 2020; Asia Pacific, APAC	Electricity Mix; Low voltage; 2020; Asia Pacific, APAC				
	Electricity Mix, Low Voltage, 2020, Italy, IT	Electricity Mix; Low voltage; 2020; Egypt, EG	Electricity Mix; Low voltage; 2020; Egypt, EG	Electricity Mix; Low voltage; 2020; Egypt, EG				
		Electricity Mix; Low voltage; 2020; United States, US	Electricity Mix; Low voltage; 2020; United States, US	Electricity Mix; Low voltage; 2020; United States, US				

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.se.com/contact

Mandatory Indicators				M173 Optimized Logic Controller - TM173ODEM22R							
Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads				
kg CO2 eq	4,78E+02	2,44E+01	8,68E-02	0*	4,53E+02	7,15E-01	-1,71E-04				
kg CO2 eq	4,77E+02	2,43E+01	8,68E-02	0*	4,52E+02	7,14E-01	-1,52E-04				
kg CO2 eq	5,86E-01	4,42E-02	0*	2,57E-04	5,42E-01	1,71E-04	-1,88E-05				
kg CO2 eq	2,38E-08	2,38E-08	0*	0*	0*	0*	0,00E+00				
kg CFC-11 eq	5,04E-06	3,09E-06	0*	0*	1,95E-06	6,01E-10	-4,70E-12				
mol H+ eq	2,78E+00	1,60E-01	5,80E-04	0*	2,62E+00	4,73E-04	-8,06E-07				
kg (PO4)³⁻ eq	1,06E-03	5,17E-05	0*	0*	1,01E-03	3,91E-06	-2,38E-09				
kg N eq	3,16E-01	1,78E-02	2,74E-04	0*	2,98E-01	2,37E-04	-2,45E-07				
mol N eq	4,43E+00	1,88E-01	3,00E-03	0*	4,24E+00	2,41E-03	-2,02E-06				
kg COVNM eq	1,03E+00	6,13E-02	7,61E-04	0*	9,64E-01	5,83E-04	-5,22E-07				
kg Sb eq	6,69E-03	6,66E-03	0*	0*	2,79E-05	0*	-1,62E-11				
MJ	1,10E+04	2,91E+02	1,21E+00	0*	1,07E+04	0*	-1,84E-03				
m3 eq	2,33E+01	7,03E+00	0*	5,26E-03	1,62E+01	2,20E-02	-3,78E-05				
	kg CO2 eq kg CO2 eq kg CO2 eq kg CFC-11 eq mol H+ eq kg N eq kg N eq mol N eq kg COVNM eq kg Sb eq MJ	Unit Module D) kg CO2 eq 4,78E+02 kg CO2 eq 4,77E+02 kg CO2 eq 5,86E-01 kg CO2 eq 2,38E-08 kg CO2 eq 2,38E-08 kg CC2 eq 2,38E-08 kg CFC-11 5,04E-06 mol H+ eq 2,78E+00 kg Neq 3,16E-01 mol N eq 4,43E+00 kg COVNM eq 1,03E+00 kg Sb eq 6,69E-03 MJ 1,10E+04	Unit Total (without Module D) [A1 - A3] - Manufacturing kg CO2 eq 4,78E+02 2,44E+01 kg CO2 eq 4,77E+02 2,43E+01 kg CO2 eq 5,86E-01 4,42E-02 kg CO2 eq 2,38E-08 2,38E-08 kg CC2 eq 2,38E-06 3,09E-06 kg CFC-11 5,04E-06 3,09E-06 mol H+ eq 2,78E+00 1,60E-01 kg N eq 3,16E-01 1,78E-02 mol N eq 4,43E+00 1,88E-01 kg COVNM eq 1,03E+00 6,13E-02 kg Sb eq 6,69E-03 6,66E-03 MJ 1,10E+04 2,91E+02	Unit Total (without Module D) [A1 - A3] - Manufacturing [A4] - Distribution kg CO2 eq 4,78E+02 2,44E+01 8,68E-02 kg CO2 eq 4,77E+02 2,43E+01 8,68E-02 kg CO2 eq 4,77E+02 2,43E+01 8,68E-02 kg CO2 eq 5,86E-01 4,42E-02 0* kg CO2 eq 2,38E-08 2,38E-08 0* kg CFC-11 5,04E-06 3,09E-06 0* mol H+ eq 2,78E+00 1,60E-01 5,80E-04 kg Neq 3,16E-01 1,78E-02 2,74E-04 mol N eq 4,43E+00 1,88E-01 3,00E-03 kg COVNM eq 1,03E+00 6,13E-02 7,61E-04 kg Sb eq 6,69E-03 6,66E-03 0* MJ 1,10E+04 2,91E+02 1,21E+00	Unit Total (without Module D) [A1 - A3] - Manufacturing [A4] - Distribution [A5] - Installation kg CO2 eq 4,78E+02 2,44E+01 8,68E-02 0* kg CO2 eq 4,77E+02 2,43E+01 8,68E-02 0* kg CO2 eq 4,77E+02 2,43E+01 8,68E-02 0* kg CO2 eq 5,86E-01 4,42E-02 0* 2,57E-04 kg CO2 eq 2,38E-08 2,38E-08 0* 0* kg CC2 eq 2,38E-08 3,09E-06 0* 0* kg CFC-11 5,04E-06 3,09E-06 0* 0* mol H+ eq 2,78E+00 1,60E-01 5,80E-04 0* kg N eq 3,16E-01 1,78E-02 2,74E-04 0* kg N eq 3,16E-01 1,78E-02 2,74E-04 0* mol N eq 4,43E+00 1,88E-01 3,00E-03 0* eq 1,03E+00 6,13E-02 7,61E-04 0* kg Sb eq 6,69E-03 6,66E-03 0* 0* M	Unit Total (without Module D) [A1 - A3] - Manufacturing [A4] - Distribution [A5] - Installation [B1 - B7] - Use kg CO2 eq 4,78E+02 2,44E+01 8,68E-02 0* 4,53E+02 kg CO2 eq 4,77E+02 2,43E+01 8,68E-02 0* 4,52E+02 kg CO2 eq 5,86E-01 4,42E-02 0* 2,57E-04 5,42E-01 kg CO2 eq 2,38E-08 2,38E-08 0* 0* 0* kg CC2 eq 2,38E-08 2,38E-08 0* 0* 0* kg CFC-11 eq 5,04E-06 3,09E-06 0* 0* 1,95E-06 mol H+ eq 2,78E+00 1,60E-01 5,80E-04 0* 2,62E+00 kg N eq 3,16E-01 1,78E-02 2,74E-04 0* 2,98E-01 mol N eq 4,43E+00 1,88E-01 3,00E-03 0* 4,24E+00 kg COVNM eq 1,03E+00 6,13E-02 7,61E-04 0* 2,79E-05 MJ 1,10E+04 2,91E+02 1,21E+00 0*	Unit Total (without Module D) [A1 - A3] - Manufacturing [A4] - Distribution [A5] - Installation [B1 - B7] - Use [C1 - C4] - End of life kg CO2 eq 4,78E+02 2,44E+01 8,68E-02 0* 4,53E+02 7,15E-01 kg CO2 eq 4,77E+02 2,43E+01 8,68E-02 0* 4,52E+02 7,14E-01 kg CO2 eq 5,86E-01 4,42E-02 0* 2,57E-04 5,42E-01 1,71E-04 kg CO2 eq 2,38E-08 2,38E-08 0* 0* 0* 0* kg CPC-11 eq 5,04E-06 3,09E-06 0* 0* 1,95E-06 6,01E-10 mol H+ eq 2,78E+00 1,60E-01 5,80E-04 0* 2,62E+00 4,73E-04 kg N eq 3,16E-01 1,78E-02 2,74E-04 0* 2,98E-01 2,37E-04 mol N eq 4,43E+00 1,88E-01 3,00E-03 0* 4,24E+00 2,41E-03 kg COVNM eq 1,03E+00 6,13E-02 7,61E-04 0* 2,79E-05 0* kg Sb eq				

ENVPEP2310029_V3 - Product Environmental Profile - M173 Optimized Logic Controller

Inventory flows Indicators	M173 Optimized Logic Controller - TM173ODEM22R								
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads	
Contribution to renewable primary energy used as energy	MJ	1,91E+03	1,01E+01	0*	0*	1,90E+03	0*	5,10E-04	
Contribution to renewable primary energy used as raw material	MJ	6,77E-01	6,77E-01	0*	0*	0*	0*	-2,21E-03	
Contribution to total renewable primary energy	MJ	1,91E+03	1,08E+01	0*	0*	1,90E+03	0*	-1,70E-03	
Contribution to non renewable primary energy used as energy	MJ	1,10E+04	2,87E+02	1,21E+00	0*	1,07E+04	0*	-1,84E-03	
Contribution to non renewable primary energy used as raw material	MJ	3,89E+00	3,89E+00	0*	0*	0*	0*	0,00E+00	
Contribution to total non renewable primary energy	MJ	1,10E+04	2,91E+02	1,21E+00	0*	1,07E+04	0*	-1,84E-03	
Contribution to use of secondary material	kg	3,47E-02	3,47E-02	0*	0*	0*	0*	0,00E+00	
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to net use of fresh water	m³	5,42E-01	1,64E-01	0*	1,22E-04	3,78E-01	5,11E-04	-8,81E-07	
Contribution to hazardous waste disposed	kg	7,51E+01	6,61E+01	0*	0*	8,83E+00	1,67E-01	-4,61E-06	
Contribution to non hazardous waste disposed	kg	7,50E+01	8,74E+00	0*	5,55E-02	6,61E+01	7,08E-02	-9,17E-05	
Contribution to radioactive waste disposed	kg	1,79E-02	5,14E-03	2,17E-06	0*	1,27E-02	3,61E-06	-4,20E-08	
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to materials for recycling	kg	1,38E-04	1,46E-05	0*	0*	0*	1,23E-04	0,00E+00	
Contribution to materials for energy recovery	kg	1,72E-08	1,72E-08	0*	0*	0*	0*	0,00E+00	
Contribution to exported energy	MJ	3,11E-02	3,11E-02	0*	0*	0*	7,73E-06	0,00E+00	

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg of C	0,00E+00
Contribution to biogenic carbon content of the associated	kg of C	1,71E-02

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

Mandatory Indicators				M173 Opt	M173 Optimized Logic Controller - TM173ODEM22R				
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	4,53E+02	0*	0*	0*	0*	0*	4,53E+02	0*
Contribution to climate change-fossil	kg CO2 eq	4,52E+02	0*	0*	0*	0*	0*	4,52E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	5,42E-01	0*	0*	0*	0*	0*	5,42E-01	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	1,95E-06	0*	0*	0*	0*	0*	1,95E-06	0*
Contribution to acidification	mol H+ eq	2,62E+00	0*	0*	0*	0*	0*	2,62E+00	0*
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	1,01E-03	0*	0*	0*	0*	0*	1,01E-03	0*
Contribution to eutrophication marine	kg N eq	2,98E-01	0*	0*	0*	0*	0*	2,98E-01	0*
Contribution to eutrophication, terrestrial	mol N eq	4,24E+00	0*	0*	0*	0*	0*	4,24E+00	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	9,64E-01	0*	0*	0*	0*	0*	9,64E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	2,79E-05	0*	0*	0*	0*	0*	2,79E-05	0*
Contribution to resource use, fossils	MJ	1,07E+04	0*	0*	0*	0*	0*	1,07E+04	0*
Contribution to water use	m3 eq	1,62E+01	0*	0*	0*	0*	0*	1,62E+01	0*

Inventory flows Indicators M173 Optimized Logic Controller - TM173ODEM2	2R
Inventory flows Unit [B1 - B7] - Use [B1] [B2] [B3] [B4] [B5] [B6]	[B7]
Contribution to use of renewable primary energy excluding MJ 1,90E+03 0* 0* 0* 0* 0* 0* 1,90E+03 renewable primary energy used as raw material	0*
Contribution to use of renewable primary energy resources Ised as raw material MJ 0* 0* 0* 0* 0* 0* 0* 0* 0* 0*	0*
Contribution to total use of renewable primary energy MJ 1,90E+03 0* 0* 0* 0* 0* 0* 1,90E+03 esources	0*
ontribution to use of non renewable primary energy excluding MJ 1,07E+04 0* 0* 0* 0* 0* 0* 0* 1,07E+04 or renewable primary energy used as raw material	0*
pontribution to use of non renewable primary energy MJ 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
ntribution to total use of non-renewable primary energy MJ 1,07E+04 0* 0* 0* 0* 0* 0* 1,07E+04 sources	0*
ntribution to use of secondary material kg 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
tribution to use of renewable secondary fuels MJ 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
tribution to use of non renewable secondary fuels MJ 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
ntribution to net use of freshwater m ³ 3,78E-01 0* 0* 0* 0* 0* 0* 3,78E-01	0*
tribution to hazardous waste disposed kg 8,83E+00 0* 0* 0* 0* 0* 0* 0* 8,83E+00	0*
ntribution to non hazardous waste disposed kg 6,61E+01 0* 0* 0* 0* 0* 0* 6,61E+01	0*
ntribution to radioactive waste disposed kg 1,27E-02 0* 0* 0* 0* 0* 0* 1,27E-02	0*
tribution to components for reuse kg 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
tribution to materials for recycling kg 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
tribution to materials for energy recovery kg 0^* 0^* 0^* 0^* 0^* 0^* 0^* 0^*	0*
ntribution to exported energy MJ 0* 0* 0* 0* 0* 0* 0* 0* 0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2.2, database version 2024-01 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	on number : ENVPEP2310029_V3		PCR-4-ed4-EN-2021 09 06					
		Supplemented by	No PSR					
Date of issue	10-2024	Information and reference documents	www.pep-ecopassport.org					
		Validity period	5 years					
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016								
Internal X External								
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)								
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022								
The components of the present PEP may not be compared with components from any other program.								
Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"								

Schneider Electric Industries SAS Country Customer Care Center http://www.se.com/contact 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

ENVPEP2310029_V3

Published by Schneider Electric ©2024 - Schneider Electric – All rights reserved

10-2024