

# Product End of Life Instructions

## APC Smart-UPS Li-Ion, Short Depth Uninterruptible Power Supply


500 to 1500 VA rack-mounted UPS with Li-ion batteries



## ⚠ Potential disassembly risks

**Caution: Batteries may contain an electrical charge - avoid creating a short across the terminals.**  
**Caution: Cracked or bloated batteries may be hazardous and lead to exposure to dangerous materials.**

## 🔧 End of Life Instructions

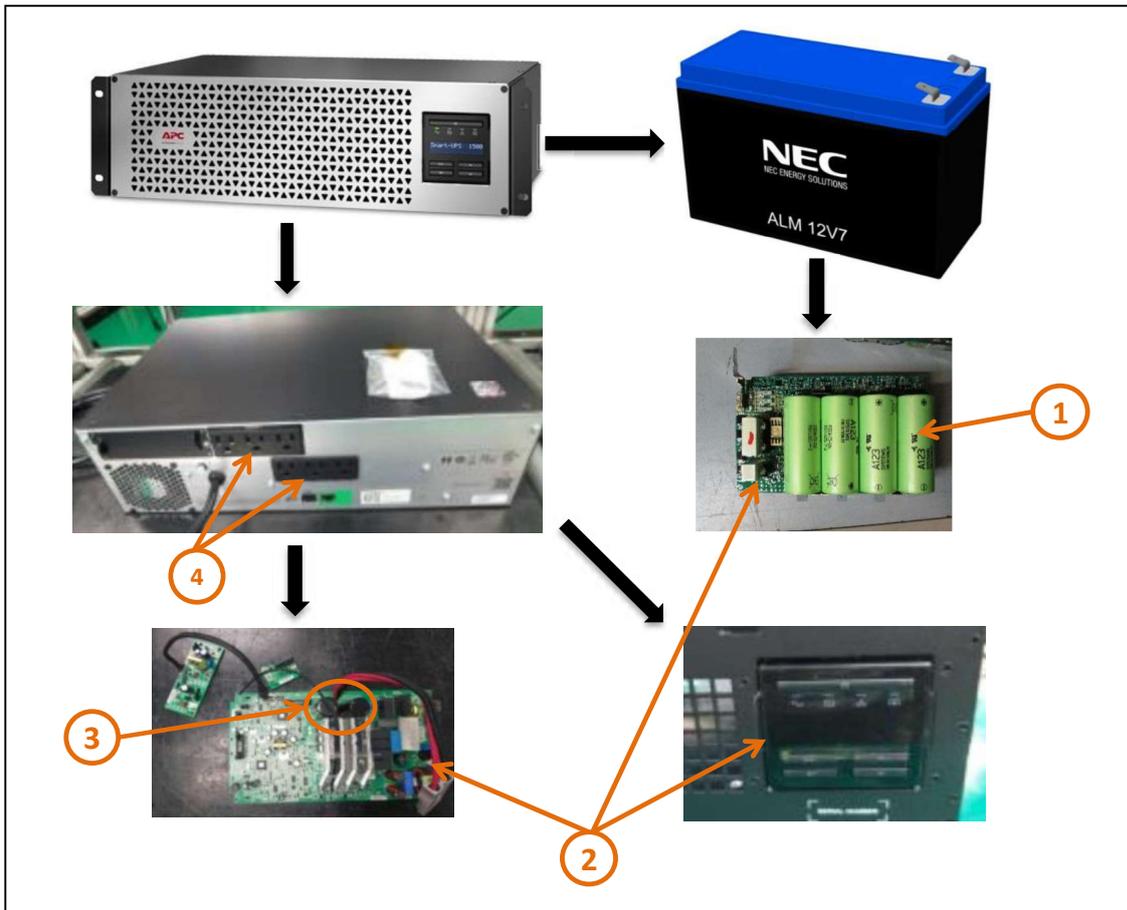

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Li-ion Batteries	2416	4 x Li-Ion battery emulators See: Safety Data Sheet available at <a href="http://www.apc.com">www.apc.com</a> Use authorized battery recycler. Caution: Batteries may contain an electrical charge - avoid creating a short across the terminals. Caution: Cracked or bloated batteries may be hazardous and lead to exposure to dangerous materials.
To be depolluted	2	Electronic Board (Power) > 10cm <sup>2</sup>	1510	3 x Printed Circuit Boards
To be depolluted	3	Electrolytic Capacitors	54	2 x Large Electrolytic Capacitors
To be depolluted	4	Brominated Frame Retardant (BFR) Plastic - ABS	62	2 x Plastic parts contained BFR



## Product description

<b>Manufacturer identification</b>	Schneider Electric Industries SAS
<b>Brand name</b>	APC
<b>Product function</b>	APC Smart-UPS™ with lithium-ion batteries protects critical data and equipment from power problems by supplying clean and reliable network-grade power. Patented green mode provides high efficiency at all load levels and lithium-ion batteries provide 2X in battery life, better performance at higher temperatures and Total Cost of Ownership savings compared to valve-regulated lead-acid (VRLA) batteries.
<b>Product reference</b>	SMTL1500RM3UC
<b>Additional similar product references</b>	SMTL1000RM2UC SMTL1000RM2UCQ SMTL1000RMI2U SMTL1000RMI2UC SMTL1000RMI2UNC SMTL1500RM3UCQ SMTL1500RMI3U SMTL1500RMI3UC SMTL1500RMI3UNC SMTL1K5R3CX180 SMTL750RM2UC SMTL750RM2UCQ SMTL750RMI2U SMTL750RMI2UC SMTL750RMI2UNC SCL500RM1NC SCL500RM1UC SCL500RM1UNC SCL500RMI1U SCL500RMI1UC SCL500RMI1UNC
<b>Total representative product mass</b>	19500 g
<b>Representative product dimensions</b>	131mm x 438mm x 302mm
<b>Accessories</b>	None
<b>Date of information release</b>	04/2019



## Additional information

<b>Legal information</b>	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
<b>In case of special transportation: transportation method</b>	The battery pack used in this product range contains Li-Ion batteries that are regulated as Dangerous Goods shipping must be performed in accordance with the appropriate transportation regulations.	
<b>Recyclability potential</b>	<b>51%</b>	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

[www.APC.com](http://www.APC.com)

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved