# **Product Environmental Profile**

## PUSH BUTTON TIMER CONTROL SWITCHES, WITH AND WITHOUT BLE CONNECTIVITY










#### General information

Representative product	PUSH BUTTON TIMER CONTROL SWITCHES, WITH AND WITHOUT BLE CONNECTIVITY - NU353718
Description of the product	The main function of this product is to switch loads (inductive, capacitive, resistive) on and off based on set count-down or programmed time schedule for switching on and off at set time.
Functional unit	Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current 10A, including any conditions specified for overload in operation characterized by the current 10A, for the operating voltage 230V and a current for short-circuit 16A for a specified time.

### Constituent materials

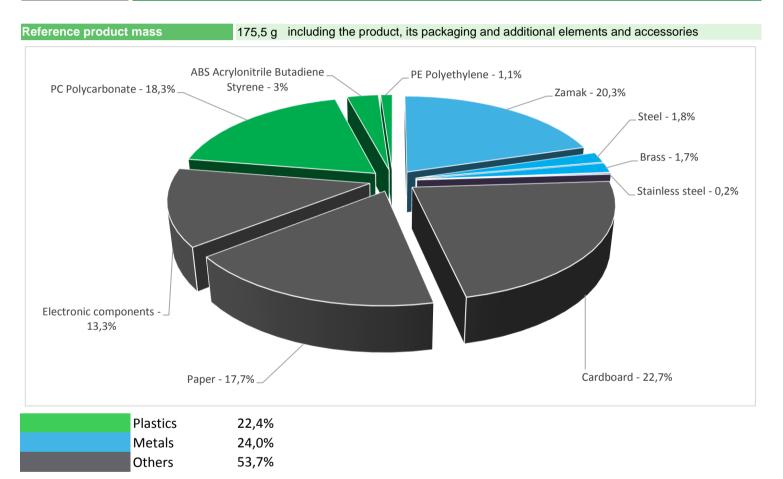

#### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>

## (1) Additional environmental information

The PUSH BU1	TON TIMER CONTROL SWITCHES, WITH AND WITHOUT BLE CONNECTIVITY presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
Distribution	Packaging weight is 72,9 g, consisting of paper (42%), cardboard (55%), PE film (3%)						
	Product distribution optimised by setting up local distribution centres						
Installation	Ref NU353718 does not require any installation operations.						
Use	The product does not require special maintenance operations.						
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
	This product contains electronic cards (29,8 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.						
End of life The location of these components and other recommendations are given in the End of Life Instruction do which is available on the Schneider-Electric Green Premium website							
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page						
	Recyclability potential:34%Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						


# *Q* Environmental impacts

Reference life time	20 years					
Product category	Switches					
Installation elements	No special components needed					
Use scenario	Load rate: 50% of In Use time rate: 30% of RLT					
Geographical representativeness	France, Russia, Spain					
Technological representativeness	The main function of this product is to switch loads (inductive, capacitive, resistive) on and off based on set count-down or programmed time schedule for switching on and off at set time.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Latvia	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27		

	PUSH BUTTON TIMER CONTROL SWITCHES, WITH AND WITHOUT BLE CONNECTIVITY - NU353718					
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
kg Sb eq	1,32E-03	1,32E-03	0*	0*	4,42E-06	0*
kg SO <sub>2</sub> eq	2,12E-01	2,98E-03	1,03E-04	0*	2,09E-01	4,13E-05
kg PO4 <sup>3-</sup> eq	1,53E-02	2,37E-03	2,38E-05	1,29E-04	1,28E-02	1,71E-05
kg CO <sub>2</sub> eq	5,27E+01	1,58E+00	2,26E-02	8,24E-02	5,09E+01	4,80E-02
kg CFC11 eq	3,46E-06	2,01E-07	0*	0*	3,25E-06	1,75E-09
kg $C_2H_4$ eq	1,19E-02	2,99E-04	7,38E-06	1,93E-05	1,15E-02	3,75E-06
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
m3	1,84E+02	2,18E-02	0*	0*	1,84E+02	0*
MJ	1,04E+03	2,51E+01	3,20E-01	0*	1,01E+03	1,85E-01
	kg Sb eq kg SO <sub>2</sub> eq kg PO <sub>4</sub> <sup>3-</sup> eq kg CO <sub>2</sub> eq kg CFC11 eq kg C <sub>2</sub> H <sub>4</sub> eq Unit m3	Unit Total   kg Sb eq 1,32E-03   kg SO <sub>2</sub> eq 2,12E-01   kg PO <sub>4</sub> <sup>3-</sup> eq 1,53E-02   kg CO <sub>2</sub> eq 5,27E+01   kg CFC11 3,46E-06   kg C <sub>2</sub> H <sub>4</sub> eq 1,19E-02   Unit Total   m3 1,84E+02	Unit Total Manufacturing   kg Sb eq 1,32E-03 1,32E-03   kg SO <sub>2</sub> eq 2,12E-01 2,98E-03   kg PO <sub>4</sub> <sup>3-</sup> eq 1,53E-02 2,37E-03   kg CO <sub>2</sub> eq 5,27E+01 1,58E+00   kg CFC11 3,46E-06 2,01E-07   kg C <sub>2</sub> H <sub>4</sub> eq 1,19E-02 2,99E-04   Unit Total Manufacturing   m3 1,84E+02 2,18E-02	Unit Total Manufacturing Distribution   kg Sb eq 1,32E-03 1,32E-03 0*   kg SO <sub>2</sub> eq 2,12E-01 2,98E-03 1,03E-04   kg PO <sub>4</sub> <sup>3-</sup> eq 1,53E-02 2,37E-03 2,38E-05   kg CO <sub>2</sub> eq 5,27E+01 1,58E+00 2,26E-02   kg CFC11 3,46E-06 2,01E-07 0*   kg C <sub>2</sub> H <sub>4</sub> eq 1,19E-02 2,99E-04 7,38E-06   Unit Total Manufacturing Distribution   m3 1,84E+02 2,18E-02 0*	Unit Total Manufacturing Distribution Installation   kg Sb eq 1,32E-03 1,32E-03 0* 0*   kg SO <sub>2</sub> eq 2,12E-01 2,98E-03 1,03E-04 0*   kg PO <sub>4</sub> <sup>3-</sup> eq 1,53E-02 2,37E-03 2,38E-05 1,29E-04   kg CO <sub>2</sub> eq 5,27E+01 1,58E+00 2,26E-02 8,24E-02   kg CFC11 3,46E-06 2,01E-07 0* 0*   kg C <sub>2</sub> H <sub>4</sub> eq 1,19E-02 2,99E-04 7,38E-06 1,93E-05   Unit Total Manufacturing Distribution Installation   m3 1,84E+02 2,18E-02 0* 0*	Unit Total Manufacturing Distribution Installation Use   kg Sb eq 1,32E-03 1,32E-03 0* 0* 4,42E-06   kg SO <sub>2</sub> eq 2,12E-01 2,98E-03 1,03E-04 0* 2,09E-01   kg PO <sub>4</sub> <sup>3-</sup> eq 1,53E-02 2,37E-03 2,38E-05 1,29E-04 1,28E-02   kg CO <sub>2</sub> eq 5,27E+01 1,58E+00 2,26E-02 8,24E-02 5,09E+01   kg CFC11 3,46E-06 2,01E-07 0* 0* 3,25E-06   kg C <sub>2</sub> H <sub>4</sub> eq 1,19E-02 2,99E-04 7,38E-06 1,93E-05 1,15E-02   Unit Total Manufacturing Distribution Installation Use   m3 1,84E+02 2,18E-02 0* 0* 1,84E+02

ENVPEP1803003\_V1-EN - SCHN-00319-V01.01-EN

# SCHN-00319-V01.01-EN - PEP ECOPASSPORT<sup>®</sup> - PUSH BUTTON TIMER CONTROL SWITCHES, WITH AND WITHOUT BLE CONNECTIVITY

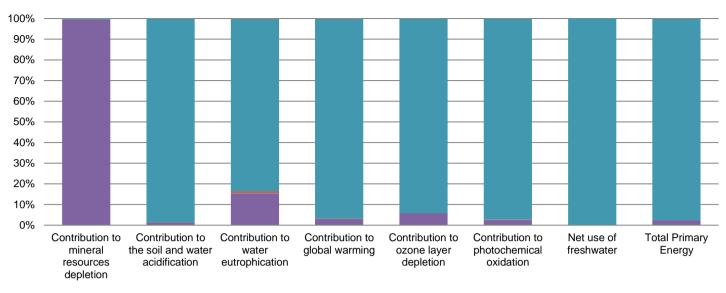

Manufacturing Distribution Installation Use End of life

Optional indicators			ON TIMER CONTI ITY - NU353718	ROL SWITCHE	ES, WITH AND	) WITHOUT I	BLE
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5,98E+02	2,03E+01	3,18E-01	0*	5,78E+02	1,72E-01
Contribution to air pollution	m³	2,55E+03	3,70E+02	9,63E-01	9,50E-01	2,18E+03	1,34E+00
Contribution to water pollution	m³	2,29E+03	1,75E+02	3,72E+00	3,15E+00	2,10E+03	2,38E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7,28E-02	7,28E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,32E+02	2,68E+00	0*	0*	1,30E+02	0*
Total use of non-renewable primary energy resources	MJ	9,08E+02	2,24E+01	3,20E-01	0*	8,85E+02	1,85E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,32E+02	2,68E+00	0*	0*	1,30E+02	0*
Use of renewable primary energy resources used as raw material	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	9,06E+02	2,07E+01	3,20E-01	0*	8,85E+02	1,85E-01
Use of non renewable primary energy resources used as raw material	MJ	1,75E+00	1,75E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2,59E+00	2,37E+00	0*	0*	2,67E-02	1,95E-01
Non hazardous waste disposed	kg	1,91E+02	8,48E-01	0*	7,68E-02	1,90E+02	0*
Radioactive waste disposed	kg	1,26E-01	3,63E-04	0*	0*	1,26E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4,91E-02	1,46E-02	0*	0*	0*	3,45E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1,22E-02	2,72E-04	0*	0*	0*	1,19E-02
Exported Energy	MJ	3,50E-02	1,72E-02	0*	1,78E-02	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

# SCHN-00319-V01.01-EN - PEP ECOPASSPORT<sup>®</sup> - PUSH BUTTON TIMER CONTROL SWITCHES, WITH AND WITHOUT BLE CONNECTIVITY

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00319-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02	
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-EN-2016 03 29	
Date of issue	05/2018	Information and reference documents	www.pep-ecopassport.org	
		Validity period	5 years	
Independent verification of	the declaration and data, in complian	nce with ISO 14025 : 2010		
Internal	External X			
The PCR review was cond	ucted by a panel of experts chaired b	y Philippe Osset (SOLINNEN)		
PEP are compliant with XP	° C08-100-1 :2014			PEP
The elements of the preser	nt PEP cannot be compared with elen	nents from another program.		eco
Document in compliance w declarations »	ith ISO 14025 : 2010 « Environmenta	I labels and declarations. Type III en	vironmental	PASS PORT <sub>®</sub>

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

*F-* 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00319-V01.01-EN

Published by Schneider Electric

© 2017 - Schneider Electric - All rights reserved

05/2018