
Product Environmental Profile

New Unica One-way switch 10A 2modules








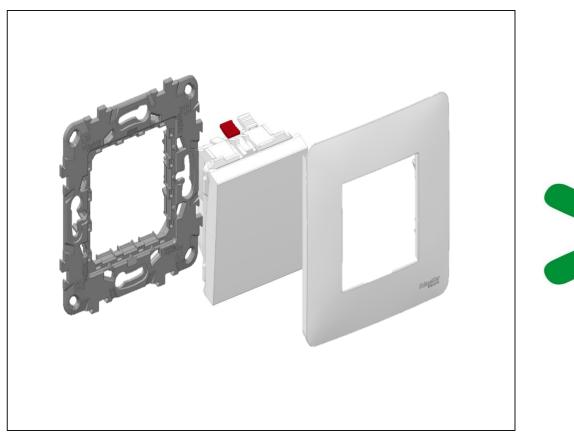

General information

Representative product	New Unica One-way switch 10A 2modules - NU320118			
Description of the product	The main purpose of the HEIDI switch rated at 10AX 250V AC product is to give a solution for the control of Electricity and Energy consumption.			
Functional unit	Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by any conditions specified for overload in operation characterized by the current le = 10A, for the operating voltage Ue=250V.			

Constituent materials

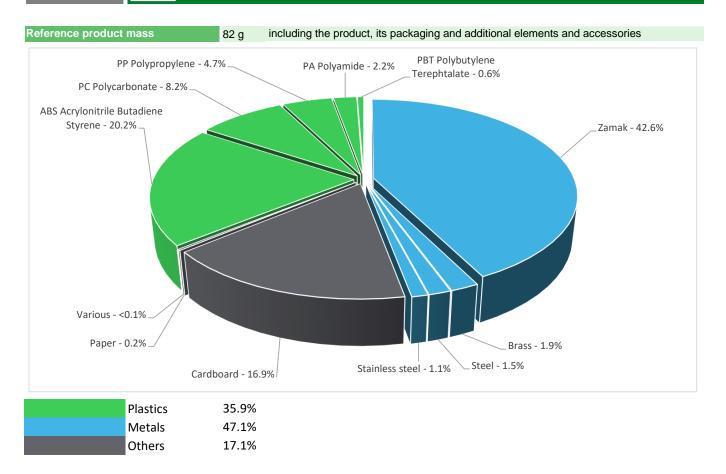

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page



The New Unica One-way switch 10A 2modules presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 18.1 g, consisting of cardboard (77.7%), Paper (0.703),PP (21.5%) Product distribution optimised by setting up local distribution centres					
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials is accounted during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 62% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

Environmental impacts

Reference life time	20 years					
Product category	Switches					
Installation elements	This product does not requrie any special componets during installation					
Use scenario	Load rate: 50% of In=0.1 Use time rate: 30% of RLT=20 years					
Geographical representativeness	Russia					
Technological representativeness	The main purpose of the HEIDI switch rated at 10AX 250V AC product is to give a solution for the control of Electricity and Energy consumption.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: SPAIN	Electricity mix; AC; consumption mix, at consumer; 220V; RU	Electricity mix; AC; consumption mix, at consumer; 220V; RU	Electricity mix; AC; consumption mix, at consumer; 220V; RU		

Compulsory indicators	New Unica One-way switch 10A 2modules - NU320118						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.44E-05	2.43E-05	0*	0*	8.71E-09	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.79E-03	1.11E-03	4.83E-05	1.96E-06	6.01E-04	1.93E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4.41E-04	2.28E-04	1.11E-05	3.96E-05	1.58E-04	4.92E-06
Contribution to global warming	$kg CO_2 eq$	1.39E+00	5.05E-01	1.06E-02	1.98E-02	8.50E-01	8.03E-03
Contribution to ozone layer depletion	kg CFC11 eq	9.60E-08	7.32E-08	2.14E-11	6.02E-11	2.23E-08	4.31E-10
Contribution to photochemical oxidation	$kg C_2H_4 eq$	2.65E-04	9.17E-05	3.45E-06	4.75E-06	1.63E-04	2.04E-06



Optional indicators		New Unica C	ne-way switch 10	DA 2modules -	NU320118		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.22E+01	7.74E+00	1.49E-01	7.67E-03	1.42E+01	8.70E-02
Contribution to air pollution	m³	2.91E+02	2.46E+02	4.50E-01	1.17E-01	4.38E+01	6.82E-01
Contribution to water pollution	m³	1.35E+02	1.07E+02	1.74E+00	1.07E+00	2.42E+01	7.71E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7.30E-04	7.30E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.63E+00	4.00E-01	1.99E-04	0*	1.22E+00	0*
Total use of non-renewable primary energy resources	MJ	1.48E+01	8.65E+00	1.49E-01	6.37E-03	5.89E+00	9.53E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.34E+00	1.11E-01	1.99E-04	0*	1.22E+00	0*
Use of renewable primary energy resources used as raw material	MJ	2.90E-01	2.90E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.35E+01	7.38E+00	1.49E-01	6.37E-03	5.89E+00	9.53E-02
Use of non renewable primary energy resources used as raw material	MJ	1.27E+00	1.27E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.51E-01	2.48E-01	0*	0*	1.23E-02	9.05E-02
Non hazardous waste disposed	kg	2.46E-01	1.60E-01	3.76E-04	1.86E-02	6.65E-02	2.93E-04
Radioactive waste disposed	kg	1.35E-04	1.23E-04	2.68E-07	1.74E-07	1.17E-05	4.59E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	4.83E-02	8.07E-03	0*	0*	0*	4.03E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	7.20E-04	9.14E-05	0*	0*	0*	6.28E-04
Exported Energy	MJ	7.29E-05	0*	0*	7.29E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME version v5.7.0.3, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00332-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH33	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	04/2018	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1:2014

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact 35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00332-V01.01-EN © 2017 - Schneider Electric – All rights reserved

04/2018