


# Product Environmental Profile

## Transfer Switch, TransferPacT Active Automatic, 250A, 400V






## General information

<b>Representative product</b>	Transfer Switch, TransferPacT Active Automatic, 250A, 400V - TA25D4L2504TPE
<b>Description of the product</b>	TransferPacT Active Automatic 250A is automatic transfer switching equipment (ATSE) which to be used in power systems for transferring a load supply between a normal and an alternate source with a supply interruption during transfer.
<b>Functional unit</b>	Power changeover during 10 years electrical power supply of a downstream installation with an electrical and mechanical control. The functional unit is characterized by a type PC, rated current Ie 250A, rated voltage Ue AC380V-440V, rated short-time withstand current Icw 10kA/0.5s, 15kA/0.1s, in accordance with the IEC 60947 standard.



## Constituent materials

**Reference product mass** 16400 g including the product, its packaging and additional elements and accessories

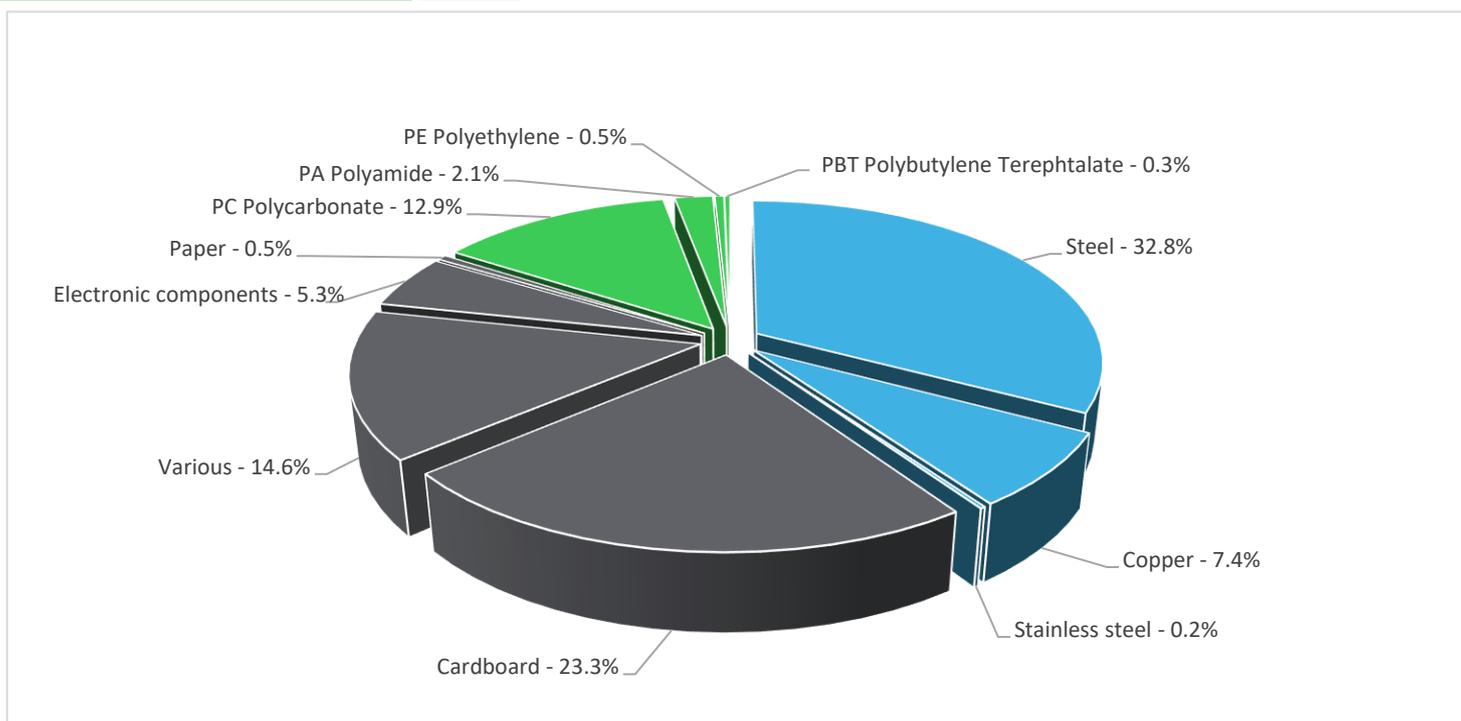

Plastics	15.8%
Metals	40.4%
Others	43.8%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Transfer Switch, TransferPacT Active Automatic, 250A, 400V presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 4094.1 g, consisting of Cardboard(97.82%), Paper(0.16%), PE-LD film(2.02%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Ref TA25D4L2504TPE does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains Electronic card (533.07g), plastic parts with brominated FR (57.94g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>50%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts


<b>Reference life time</b>	10 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
<b>Use scenario</b>	The product is in active mode 1% of the time with a power use of 6W and in stand-by mode 99% of the time with a power use of 4W, for 10 years			
<b>Geographical representativeness</b>	China			
<b>Technological representativeness</b>	TransferPacT Active Automatic 250A is automatic transfer switching equipment (ATSE) which to be used in power systems for transferring a load supply between a normal and an alternate source with a supply interruption during transfer.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN

### Compulsory indicators

### Transfer Switch, TransferPacT Active Automatic, 250A, 400V - TA25D4L2504TPE

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.24E-02	2.24E-02	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.32E+00	9.14E-01	9.66E-03	9.37E-04	3.88E-01	4.33E-03
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	3.94E-01	2.88E-01	2.23E-03	2.52E-04	1.02E-01	1.41E-03
Contribution to global warming	kg CO <sub>2</sub> eq	7.72E+02	4.09E+02	2.12E+00	2.25E-01	3.58E+02	3.25E+00
Contribution to ozone layer depletion	kg CFC11 eq	1.46E-04	1.43E-04	0*	0*	2.85E-06	1.28E-07
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.16E-01	6.84E-02	6.89E-04	7.01E-05	4.59E-02	4.31E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.49E+01	1.45E+01	0*	0*	4.00E-01	2.28E-03
Total Primary Energy	MJ	1.24E+04	6.48E+03	2.99E+01	2.93E+00	5.86E+03	2.05E+01

ENVPEP2210017\_V1 - Product Environmental Profile - Transfer Switch, TransferPacT Active Automatic, 250A, 400V

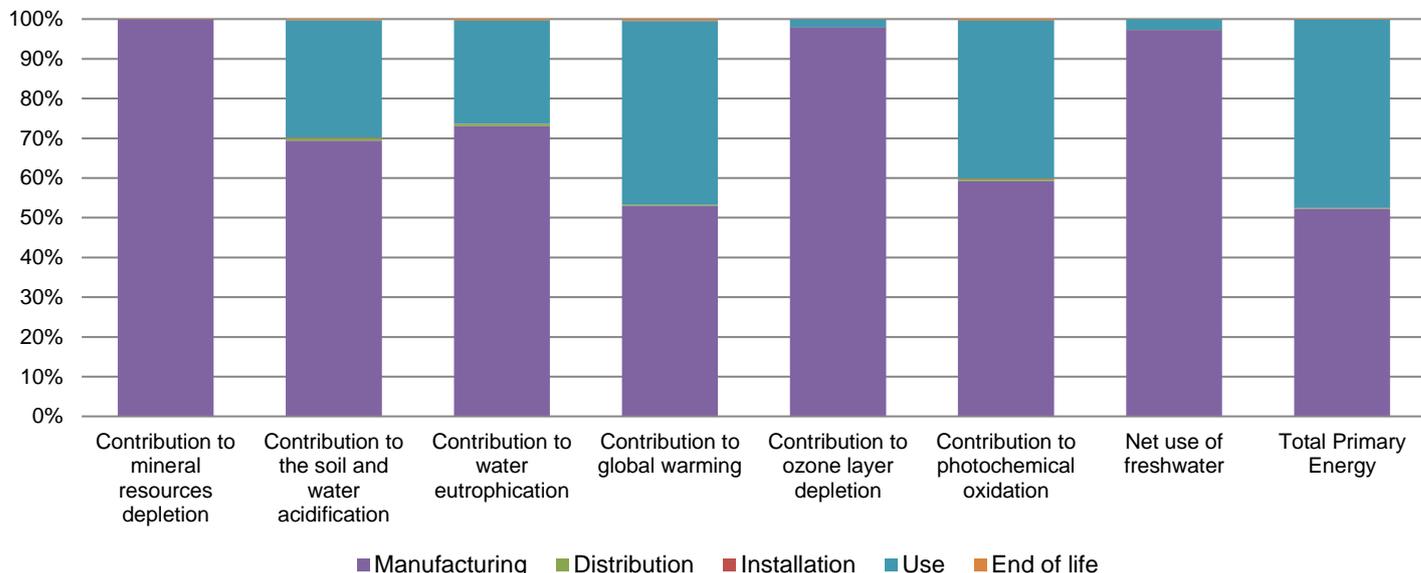

Optional indicators		Transfer Switch, TransferPacT Active Automatic, 250A, 400V - TA25D4L2504TPE					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7.86E+03	2.40E+03	2.97E+01	2.90E+00	5.41E+03	1.65E+01
Contribution to air pollution	m³	6.84E+04	3.10E+04	9.00E+01	9.54E+00	3.72E+04	1.48E+02
Contribution to water pollution	m³	5.60E+04	3.76E+04	3.48E+02	3.39E+01	1.78E+04	2.07E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.05E+00	4.05E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	5.35E+02	2.34E+02	0*	0*	3.01E+02	0*
Total use of non-renewable primary energy resources	MJ	1.19E+04	6.25E+03	2.99E+01	2.92E+00	5.56E+03	2.05E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.22E+02	2.21E+02	0*	0*	3.01E+02	0*
Use of renewable primary energy resources used as raw material	MJ	1.34E+01	1.34E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.18E+04	6.14E+03	2.99E+01	2.92E+00	5.56E+03	2.05E+01
Use of non renewable primary energy resources used as raw material	MJ	1.11E+02	1.11E+02	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	8.63E+02	8.31E+02	0*	0*	1.15E+01	2.06E+01
Non hazardous waste disposed	kg	3.00E+02	2.35E+02	7.52E-02	9.51E-02	6.50E+01	6.12E-02
Radioactive waste disposed	kg	1.21E+00	1.20E+00	0*	0*	2.14E-03	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.23E+01	1.74E+00	0*	4.02E+00	0*	6.56E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	6.38E-01	0*	0*	0*	0*	6.38E-01
Exported Energy	MJ	1.27E-02	1.19E-03	0*	1.15E-02	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.4, database version 2022-01 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number</i>	ENVPEP2210017_V1	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	11/2022	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP2210017\_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

11/2022