
# **Product Environmental Profile**

#### Vigi module 200-440V 3P for CVS250

### **EasyPact CVS**





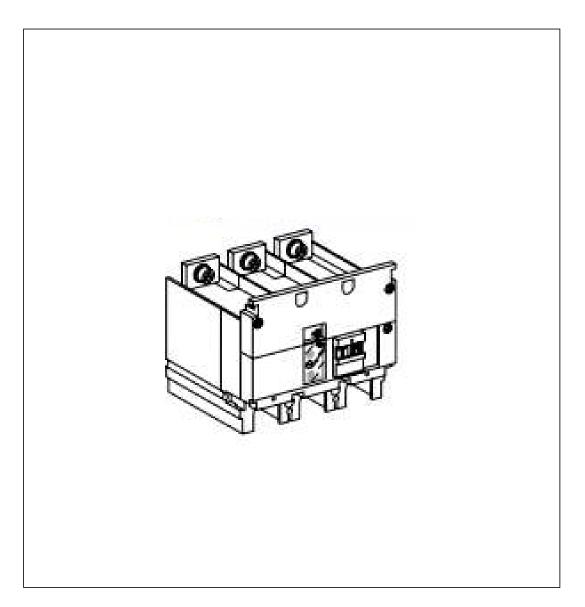


# General information

Reference product	LV529492
Description of the product	The Vigi module is the combination of CVS 100A-250A, 3 pole circuit breaker, Trip Unit (TMD or Electronic Micrologic). The main purpose of the 3P Vigi module is to protect installations against insulation faults. Earth-leakage protection is achieved by installing a vigi module directly on the downstream side of the circuit breaker terminals. It directly actuates the toggle mechanism of the breaker through the trip unit (magnetic, thermal-magnetic or Micrologic).
	Vigi 200-440V 3P&4P for CVS100A-250A circuit breaker
Description of the range	The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	Protect during 20 years the installation against overloads and short-circuits and people and premises at risk of fire or explosion against insulation defects in circuit with assigned voltage 200 - 440V and rated current 100-250A.

# Constituent materials

Reference product mass

950 g including the product, its packaging and additional elements and accessories

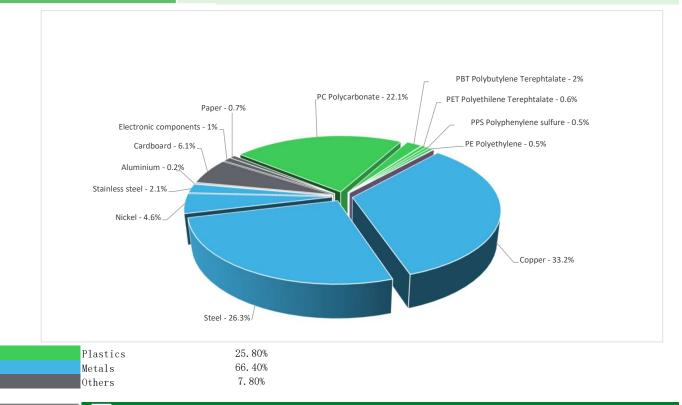

# Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="https://www.se.com/ww/en/work/support/green-premium/">https://www.se.com/ww/en/work/support/green-premium/</a>

# (19) Additional environmental information

End Of Life

Recyclability potential:

65%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

# **Tenvironmental impacts**

Reference service life time	20 years					
Product category	Other equipments - Passive product - non-continuous operation					
Installation elements	Ref LV529492 does not require any installation operations.					
Use scenario	load rate / rated current (In): 30 % of In percentage of utilization time: 30%					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production					
Geographical representativeness	China					
	[A1 - A3]	[A5]	[B6]	[C1 - C4]		
Energy model used	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN		

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators			Vigi module 200-440V 3P for CVS250 - LV529492					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
impact mulcators		Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	4.13E+02	6.72E+00	2.74E-01	1.15E-01	4.04E+02	2.10E+00	-3.62E+00
Contribution to climate change-fossil	kg CO2 eq	4.13E+02	6.63E+00	2.74E-01	1.10E-01	4.04E+02	2.03E+00	-3.52E+00
Contribution to climate change-biogenic	kg CO2 eq	2.16E-01	8.69E-02	0*	5.09E-03	5.79E-02	6.64E-02	-1.07E-01
Contribution to climate change-land use and land use change	kg CO2 eq	1.13E-06	2.56E-09	0*	1.71E-08	0*	1.11E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	3.35E-06	7.55E-07	2.42E-07	7.68E-09	2.31E-06	4.18E-08	-6.77E-07
Contribution to acidification	mol H+ eq	3.18E+00	1.46E-01	1.19E-03	4.57E-04	3.02E+00	1.17E-02	-9.69E-02
Contribution to eutrophication, freshwater	kg (PO4) <sup>3</sup> eq	2.45E-03	9.50E-06	0*	9.05E-07	8.52E-05	2.36E-03	-6.67E-06
Contribution to eutrophication marine	kg N eq	3.31E-01	5.76E-03	5.47E-04	1.21E-04	3.23E-01	1.86E-03	-2.74E-03
Contribution to eutrophication, terrestrial	mol N eq	3.76E+00	6.63E-02	5.93E-03	9.18E-04	3.66E+00	2.27E-02	-3.15E-02
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.12E+00	2.77E-02	1.94E-03	2.45E-04	1.08E+00	5.96E-03	-1.51E-02
Contribution to resource use, minerals and metals	kg Sb eq	2.24E-03	2.17E-03	0*	0*	5.18E-06	6.64E-05	-1.37E-03
Contribution to resource use, fossils	MJ	6.71E+03	1.07E+02	3.33E+00	1.19E+00	6.53E+03	6.54E+01	-7.26E+01
Contribution to water use	m3 eq	2.75E+01	7.50E+00	1.39E-02	5.33E-02	1.78E+01	2.10E+00	-4.94E+00

Additional indicators for the French regulation are available as well

Inventory flows Indicators			Vigi module 200-440V 3P for CVS250 - LV529492					
Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits	
Onit	Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]	
MJ	6.95E+02	2.36E+00	0*	8.89E-02	6.91E+02	1.59E+00	-1.81E+00	
MJ	1.31E+00	1.31E+00	0*	0*	0*	0*	-1.13E+00	
MJ	6.96E+02	3.68E+00	0*	8.89E-02	6.91E+02	1.59E+00	-2.94E+00	
<sub>ial</sub> MJ	6.70E+03	9.86E+01	3.33E+00	1.19E+00	6.53E+03	6.54E+01	-7.24E+01	
MJ	8.66E+00	8.66E+00	0*	0*	0*	0*	-1.46E-01	
MJ	6.71E+03	1.07E+02	3.33E+00	1.19E+00	6.53E+03	6.54E+01	-7.26E+01	
kg	3.39E-06	3.39E-06	0*	0*	0*	0*	0.00E+00	
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
m³	6.41E-01	1.75E-01	3.23E-04	1.24E-03	4.15E-01	5.02E-02	-1.15E-01	
kg	9.15E+01	7.83E+01	0*	0*	1.23E+01	9.80E-01	-1.17E+02	
kg	7.83E+01	7.40E+00	0*	3.72E-01	7.03E+01	2.38E-01	-3.62E+00	
kg	4.41E-03	1.42E-03	5.44E-05	5.01E-05	2.88E-03	1.38E-05	-1.04E-03	
kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
kg	6.61E-01	0*	0*	6.58E-02	0*	5.95E-01	0.00E+00	
kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00	
	MJ MJ MJ MJ MJ MJ MJ MJ MJ MG MJ MG	MJ 6.95E+02  MJ 1.31E+00  MJ 6.96E+02  ma 6.70E+03  MJ 8.66E+00  MJ 6.71E+03  kg 3.39E-06  MJ 0.00E+00  MJ 0.00E+00  ma 6.41E-01  kg 9.15E+01  kg 7.83E+01  kg 4.41E-03  kg 0.00E+00  MJ 0.00E+00  MJ 0.00E+00	MJ 6.95E+02 2.36E+00  MJ 1.31E+00 1.31E+00  MJ 6.96E+02 3.68E+00  MJ 6.70E+03 9.86E+01  MJ 8.66E+00 8.66E+00  MJ 6.71E+03 1.07E+02  kg 3.39E-06 3.39E-06  MJ 0.00E+00 0*  MJ 0.00E+01 7.83E+01  kg 9.15E+01 7.83E+01  kg 7.83E+01 7.40E+00  kg 6.61E-01 0*  kg 0.00E+00 0*  MJ 0.00E+00 0*	Unit         Total         Manufact. [A1 - A3]         Distribution [A4]           MJ         6.95E+02         2.36E+00         0*           MJ         1.31E+00         1.31E+00         0*           MJ         6.96E+02         3.68E+00         0*           MJ         6.70E+03         9.86E+01         3.33E+00           MJ         6.71E+03         1.07E+02         3.33E+00           MJ         6.71E+03         1.07E+02         3.33E+00           MJ         0.00E+00         0*         0*           kg         9.15E+01         7.83E+01         0*           kg         7.83E+01         7.40E+00         0*           kg         0.00E+00         0*         0*           kg         6.61E-01         0*         0*           kg         0.00E+00         0*         0*           MJ         0.00E+00         0*         0*           kg de C         0.00E+00 <td>Unit         Total         Manufact. [A1 - A3]         Distribution [A4]         Installation [A5]           MJ         6.95E+02         2.36E+00         0°         8.89E-02           MJ         1.31E+00         1.31E+00         0°         0°           MJ         6.96E+02         3.68E+00         0°         8.89E-02           MJ         6.70E+03         9.86E+01         3.33E+00         1.19E+00           MJ         6.71E+03         1.07E+02         3.33E+00         1.19E+00           kg         3.39E-06         3.39E-06         0°         0°           MJ         0.00E+00         0°         0°         0°           MJ         0.00E+00         0°         0°         0°           MJ         0.00E+00         0°         0°         0°           m³         6.41E-01         1.75E-01         3.23E-04         1.24E-03           kg         7.83E+01         7.40E+00         0°         3.72E-01           kg         0.00E+00         0°         0°         0°           kg         6.61E-01         0°         0°         0°           kg         0.00E+00         0°         0°         0°</td> <td>Unit         Total         Manufact. [A1 - A3]         Distribution [A4]         Installation [B1 - B7]           MJ         6.95E+02         2.36E+00         0°         8.89E-02         6.91E+02           MJ         1.31E+00         1.31E+00         0°         0°         0°           MJ         6.96E+02         3.68E+00         0°         8.89E-02         6.91E+02           MJ         6.70E+03         9.86E+01         3.33E+00         1.19E+00         6.53E+03           MJ         8.66E+00         8.66E+00         0°         0°         0°           MJ         6.71E+03         1.07E+02         3.33E+00         1.19E+00         6.53E+03           kg         3.39E-06         3.39E-06         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°           m³         6.41E-01         1.75E-01         3.23E-04         1.24E-03         4.15E-01           kg         7.83E+01         7.40E+00         0°         3.72E-01         7.03E+01           kg         0.00E+00         0°         0°         0°         0°</td> <td>Unit         Total         Manufact. [A1 - A3]         Distribution [A4]         Installation [B1 - B7]         Use [C1 - C4]           MJ         6.95E+02         2.36E+00         0°         8.89E-02         6.91E+02         1.59E+00           MJ         1.31E+00         1.31E+00         0°         0°         0°         0°         0°           MJ         6.96E+02         3.68E+00         0°         8.89E-02         6.91E+02         1.59E+00           MJ         6.70E+03         9.86E+01         3.33E+00         1.19E+00         6.53E+03         6.54E+01           MJ         8.66E+00         8.66E+00         0°         0°         0°         0°           MJ         6.71E+03         1.07E+02         3.33E+00         1.19E+00         6.53E+03         6.54E+01           kg         3.39E-06         3.39E-06         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°         0°           m³         6.41E-01         1.75E-01         3.23E-04         1.24E-03         4.15E-01         5.02E-02           kg         9.15E+01         7.40E+00         0°         3.72E-01         7.03E+01         2.38E-01</td>	Unit         Total         Manufact. [A1 - A3]         Distribution [A4]         Installation [A5]           MJ         6.95E+02         2.36E+00         0°         8.89E-02           MJ         1.31E+00         1.31E+00         0°         0°           MJ         6.96E+02         3.68E+00         0°         8.89E-02           MJ         6.70E+03         9.86E+01         3.33E+00         1.19E+00           MJ         6.71E+03         1.07E+02         3.33E+00         1.19E+00           kg         3.39E-06         3.39E-06         0°         0°           MJ         0.00E+00         0°         0°         0°           MJ         0.00E+00         0°         0°         0°           MJ         0.00E+00         0°         0°         0°           m³         6.41E-01         1.75E-01         3.23E-04         1.24E-03           kg         7.83E+01         7.40E+00         0°         3.72E-01           kg         0.00E+00         0°         0°         0°           kg         6.61E-01         0°         0°         0°           kg         0.00E+00         0°         0°         0°	Unit         Total         Manufact. [A1 - A3]         Distribution [A4]         Installation [B1 - B7]           MJ         6.95E+02         2.36E+00         0°         8.89E-02         6.91E+02           MJ         1.31E+00         1.31E+00         0°         0°         0°           MJ         6.96E+02         3.68E+00         0°         8.89E-02         6.91E+02           MJ         6.70E+03         9.86E+01         3.33E+00         1.19E+00         6.53E+03           MJ         8.66E+00         8.66E+00         0°         0°         0°           MJ         6.71E+03         1.07E+02         3.33E+00         1.19E+00         6.53E+03           kg         3.39E-06         3.39E-06         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°           m³         6.41E-01         1.75E-01         3.23E-04         1.24E-03         4.15E-01           kg         7.83E+01         7.40E+00         0°         3.72E-01         7.03E+01           kg         0.00E+00         0°         0°         0°         0°	Unit         Total         Manufact. [A1 - A3]         Distribution [A4]         Installation [B1 - B7]         Use [C1 - C4]           MJ         6.95E+02         2.36E+00         0°         8.89E-02         6.91E+02         1.59E+00           MJ         1.31E+00         1.31E+00         0°         0°         0°         0°         0°           MJ         6.96E+02         3.68E+00         0°         8.89E-02         6.91E+02         1.59E+00           MJ         6.70E+03         9.86E+01         3.33E+00         1.19E+00         6.53E+03         6.54E+01           MJ         8.66E+00         8.66E+00         0°         0°         0°         0°           MJ         6.71E+03         1.07E+02         3.33E+00         1.19E+00         6.53E+03         6.54E+01           kg         3.39E-06         3.39E-06         0°         0°         0°         0°           MJ         0.00E+00         0°         0°         0°         0°         0°           m³         6.41E-01         1.75E-01         3.23E-04         1.24E-03         4.15E-01         5.02E-02           kg         9.15E+01         7.40E+00         0°         3.72E-01         7.03E+01         2.38E-01	

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2312017_V1	Drafting rules	PEP-PCR-ed4-2021 09 06			
Verifier accreditation N°		Supplemented by	PSR-0005-ed2-2016 03 29			
Date of issue	2023/12/13	Information and reference documents	www.pep-ecopassport.org			
		Validity period	5 years			
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016						
Internal X	External					
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (Ddemain)						
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019						
The elements of the present PEP cannot be compared with elements from another program.						
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »						

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com ENVPEP2312017\_V1 Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

neider Electric – All rights reserved 2023/12/13