Product Environmental Profile

ILM Servo Module












General information

| Representative product | ILM Servo Module - ILM1002P32F0000 | | | | | |
|----------------------------|---|--|--|--|--|--|
| Description of the product | IOTOR ILM 100,4,4NM,3KRPM,KEY IP MULTI B | | | | | |
| Description of the range | The ILM62 Servo Module combines motor, power stage and digital servo controller for an axis in a space-saving housing. Due to its compact construction with the integrated controller, it is perfectly suitable for peripheral set-up. It is available with individual or multi-turn encoders and configures itself with the aid of the electronic nameplate in the ILM62 Servo Module. The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology. | | | | | |
| Functional unit | To coordinate and synchronize motion control 100% of the time for 10 years. | | | | | |

Constituent materials

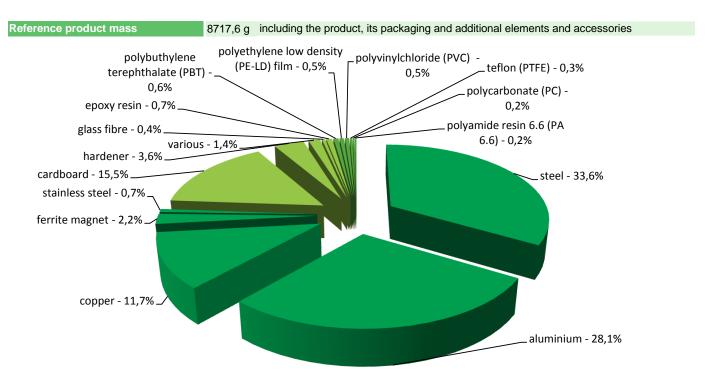

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




| | The ILM Servo Module presents the following relevant environmental aspects | | | | | | |
|---------------|--|--|--|--|--|--|--|
| Manufacturing | Manufactured at a Schneider Electric production site ISO14001 certified | | | | | | |
| | Weight and volume of the packaging optimized, based on the European Union's packaging directive | | | | | | |
| Distribution | Packaging weight is 1347,4 g, consisting of cardboard (96,2%), polyethylene film (2,8%), polycarbonate (CD - 1%) | | | | | | |
| | Product distribution optimised by setting up local distribution centres | | | | | | |
| Installation | The product does not require any installation operation. | | | | | | |
| Use | The product does not require special maintenance operations. | | | | | | |
| | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials | | | | | | |
| | This product contains electronic cards (125 g) that should be separated from the stream of waste so as to optimize end-of-life treatment. | | | | | | |
| End of life | The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website | | | | | | |
| | http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page | | | | | | |
| | Recyclability potential: Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). | | | | | | |

Environmental impacts

| Reference life time | 10 years | | | | | |
|----------------------------------|---|---|---|---|--|--|
| Product category | Active products | | | | | |
| Installation elements | No special components needed | | | | | |
| Use scenario | Consumed power is 117,9 W 100 % of the time in Active mode, W 0 % of the time in Standby mode, W 0 % of the time in Sleep mode and W 0 % of the time in Off mode. | | | | | |
| | The product is in active mode 100% of the time with a power use of 117,90W for 10 years. | | | | | |
| Geographical representativeness | Europe | | | | | |
| Technological representativeness | MOTOR ILM 100,4,4NM,3KRPM,KEY IP MULTI B | | | | | |
| | Manufacturing | Installation | Use | End of life | | |
| Energy model used | Energy model used: Germany | Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27 | Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU- 27 | | |

| Compulsory indicators | ILM Servo Module - ILM1002P32F0000 | | | | | | |
|--|-------------------------------------|----------|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 5,95E-03 | 5,68E-03 | 0* | 0* | 2,78E-04 | 0* |
| Contribution to the soil and water acidification | $kg SO_2 eq$ | 4,63E+01 | 1,69E-01 | 5,14E-03 | 0* | 4,61E+01 | 0* |
| Contribution to water eutrophication | kg PO ₄ ³⁻ eq | 1,76E+00 | 2,47E-02 | 1,18E-03 | 0* | 1,73E+00 | 5,35E-04 |
| Contribution to global warming | kg CO ₂ eq | 6,15E+03 | 5,17E+01 | 1,12E+00 | 0* | 6,10E+03 | 7,68E-01 |
| Contribution to ozone layer depletion | kg CFC11 eq | 1,54E-03 | 5,72E-05 | 0* | 0* | 1,48E-03 | 0* |
| Contribution to photochemical oxidation | kg C₂H₄ eq | 2,19E+00 | 1,44E-02 | 3,66E-04 | 0* | 2,18E+00 | 2,33E-04 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m3 | 1,64E+01 | 5,02E-01 | 0* | 0* | 1,59E+01 | 0* |

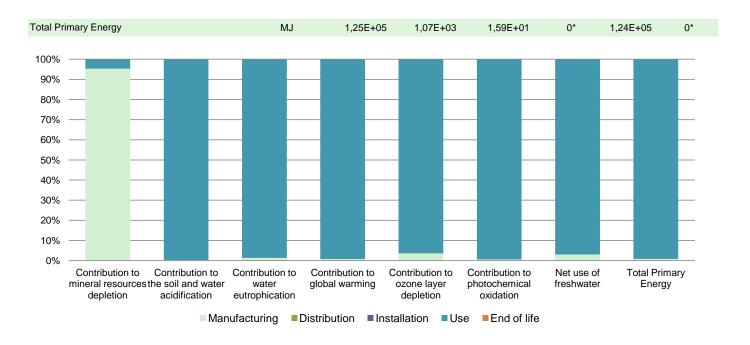

| Optional indicators | ILM Servo Module - ILM1002P32F0000 | | | | | | |
|---|------------------------------------|----------|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 6,34E+04 | 6,03E+02 | 1,58E+01 | 0* | 6,28E+04 | 1,00E+01 |
| Contribution to air pollution | m³ | 2,72E+05 | 1,03E+04 | 4,78E+01 | 0* | 2,62E+05 | 7,79E+01 |
| Contribution to water pollution | m³ | 2,60E+05 | 4,02E+03 | 1,85E+02 | 0* | 2,56E+05 | 8,53E+01 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 3,89E+00 | 3,89E+00 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 8,88E+03 | 3,58E+01 | 0* | 0* | 8,84E+03 | 0* |
| Total use of non-renewable primary energy resources | MJ | 1,16E+05 | 1,04E+03 | 1,59E+01 | 0* | 1,15E+05 | 1,22E+01 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 8,88E+03 | 3,58E+01 | 0* | 0* | 8,84E+03 | 0* |
| Use of renewable primary energy resources used as raw material | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 1,16E+05 | 1,02E+03 | 1,59E+01 | 0* | 1,15E+05 | 1,22E+01 |
| Use of non renewable primary energy resources used as raw material | MJ | 1,44E+01 | 1,44E+01 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Hazardous waste disposed | kg | 1,49E+02 | 1,34E+02 | 0* | 2,70E+00 | 0* | 1,20E+01 |
| Non hazardous waste disposed | kg | 2,29E+04 | 4,90E+01 | 0* | 0* | 2,28E+04 | 0* |
| Radioactive waste disposed | kg | 1,86E+01 | 3,80E-02 | 0* | 0* | 1,86E+01 | 0* |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 3,31E+00 | 4,15E-01 | 0* | 0* | 0* | 2,90E+00 |
| Components for reuse | kg | 0,00E+00 | 0* | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 2,02E-02 | 9,93E-04 | 0* | 0* | 0* | 1,92E-02 |
| Exported Energy | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* |

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Depending on the impact analysis, the environmental indicators (without RMD) of other products in this family may be proportional extrapolated by energy consumption values". For RMD impact may be proportional extrapolated by mass of the product.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N° SCHN-00081-V01.01-EN Drafting rules PCR-ed3-EN-2015 04 02

Verifier accreditation N° VH24

Date of issue 06/2016 Information and reference documents www.pep-ecopassport.org

Validity period 5 years

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental

declarations »

Environmental data in alignment with EN 15804: 2012 + A1: 2013



Schneider Electric Industries SAS

Schneider Electric Country Customer Care Center

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00081-V01.01-EN © 2016 - Schneider Electric – All rights reserved

06/2016