

Product Environmental Profile

Altira Movement detector



Product Environmental Profile - PEP

Product overview

The main purpose of the Altira Movement Detector is to automatically switch On/Off the connected lights for the occupancy conditions as indoor light switch. Load is switched on when movement is detected and off when no movement is detected for a time out period set by the user. In case ambient light is above a threshold set by the user the load will remain off. In general Altira Movement Detector will save energy since the load is switched off automatically when no people are present.

This range consists of: Altira Movement detectors.

The representative product used for the analysis is Movement detector Universal 10A, Ref. ALB45113.


The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

The environmental analysis was performed in conformity with ISO 14040.

Constituent materials

The mass of the product range is from 50 g to 120 g including packaging. It is 117.77 g for the Movement detector Universal 10A, Ref. ALB45113.

The constituent materials are distributed as follows:

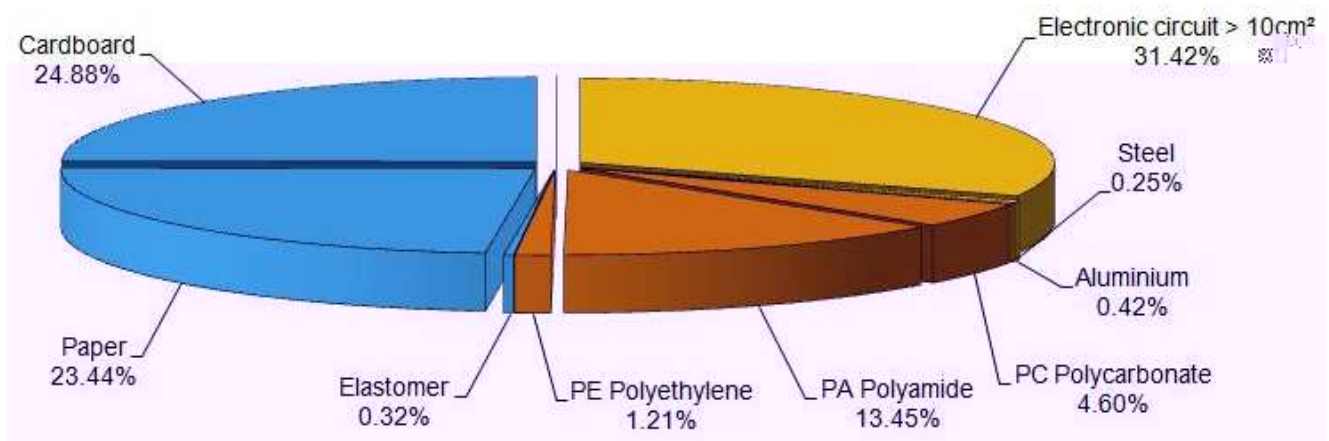

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Manufacturing

The Altira Movement detector product range is manufactured at a Schneider Electric production site on which an ISO14001 certified environmental management system has been established.

Distribution

The weight and volume of the packaging have been optimized, based on the European Union's packaging directive.

The Movement detector Universal 10A packaging weight is 57.29 g. It consists of Paper (Virgin) 27.61 g, Cardboard 29.30 g and Elastomer 0.38g.

Use

The products of the Altira Movement detector range do not generate environmental pollution (noise, emissions) requiring special precautionary measures in standard use.

The electrical power consumption depends on the conditions under which the product is implemented and used. The electrical power consumed by the Altira Movement detector range is between 0.3 W and 1.3 W. It is 0.6 W in active mode and 94% in standby mode for the referenced Movement detector Universal 10A, Ref. ALB45113.

Product Environmental Profile - PEP

End of life

At end of life, the products in the Altira Movement detector range have been optimized to decrease the amount of waste and allow recovery of the product components and materials. This product range contains PCBAs that should be separated from the stream of waste so as to optimize end-of-life treatment by special treatments. The location of these components and other recommendations are given in the End of Life Instruction document which is available for this product range. The recyclability potential of the products has been evaluated using the "ECO DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio is: 26.83%

As described in the recyclability calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

Environmental impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I) Use (U), and End of life (E).

Modeling hypothesis and method:

- The calculation was performed on the Movement detector Universal 10A, Ref. ALB45113.
- Product packaging: Is included.
- Installation components: No special components included.
- Scenario for the Use phase: This product range is included in the category "Energy consuming product" (assumed service life is 10 years and use scenario is: 0.6 W consumed power and 100% service uptime).
- The electrical power model used for calculation is European model.

End of life impacts are based on a worst case transport distance to the recycling plant (1000km).

Presentation of the product environmental impacts

Environmental indicators	Unit	For Movement detector Universal 10A, Ref. ALB45113					
		S = M + D + I + U + E	M	D	I	U	E
Air Acidification	kg H+ eq	7.07E-03	2.54E-04	1.75E-06	0.00E+00	5.033E-03	1.78E-03
Air toxicity	m ³	6.59E+06	3.68E+05	2.59E+03	0.00E+00	6.219E+06	2.63E+03
Energy Depletion	MJ	7.71E+02	2.73E+01	1.69E-01	0.00E+00	7.431E+02	1.76E-01
Global Warming Potential	kg CO ₂ eq.	5.30E+01	1.55E+00	1.33E-02	0.00E+00	3.751E+01	1.39E+01
Hazardous Waste Production	kg	6.50E-01	2.79E-02	4.67E-06	0.00E+00	6.223E-01	5.18E-06
Ozone Depletion Potential	kg CFC-11 eq.	1.22E-05	3.18E-07	8.89E-09	0.00E+00	2.037E-06	9.85E-06
Photochemical Ozone Creation Potential	kg C ₂ H ₄ eq.	2.55E-02	4.77E-04	1.11E-05	0.00E+00	1.312E-02	1.19E-02
Raw Material Depletion	Y-1	3.85E-14	3.77E-14	2.31E-19	0.00E+00	8.439E-16	2.40E-19
Water Depletion	dm ³	1.24E+02	1.68E+01	1.51E-02	0.00E+00	1.074E+02	1.67E-02
Water Eutrophication	kg PO ₄ ³⁻ eq.	4.55E-04	1.35E-04	2.10E-07	0.00E+00	8.814E-05	2.32E-04
Water Toxicity	m ³	1.30E+01	4.42E-01	2.05E-03	0.00E+00	1.077E+01	1.74E+00

Life cycle assessment has been performed with the EIME software (Environmental Impact and Management Explorer), version 5, and with its database version 4.1.

The **Use** phase is the life cycle phase which has the greatest impact on the majority of environmental indicators.

Extrapolation rules for product range: "Depending on the impact analysis, the environmental indicators (without RMD) of other products in this family may be proportional extrapolated by energy consumption values". For RMD, impact may be proportional extrapolated by mass of the product.

System approach

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Glossary

Raw Material Depletion (RMD)

This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of nat

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

Published by: Schneider Electric