Product Environmental Profile

MUREVA SO PIN EARTH 16A SCREWLESS GREY







General information


Representative product MUREVA SO PIN EARTH 16A SCREWLESS GREY - MUR35031

Description of the product

The main purpose of the Mureva Styl - socket-outlet - 16A - 2P + E shutters - grey French standard product range is to give aaccess to Electricity till the plug.

Connect/Disconnect during 20 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts and with a protection class IP55 in accordance with the standard IEC 60529 and IK08 in accordance with the standard IEC 62262.

Constituent materials

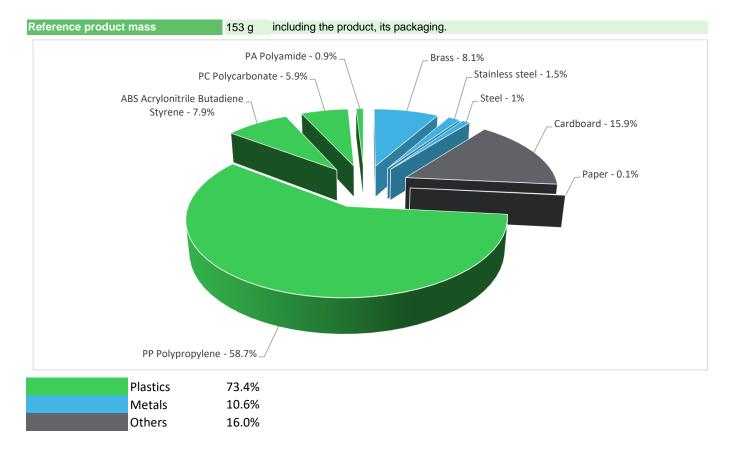

☐ Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

The MUREVA SO PIN EARTH 16A SCREWLESS GREY presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 24.2 g, consisting of cardboard (99.67%), paper (0.33%)					
	Product distribution optimised by setting up local distribution centres					
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 79% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

Environmental impacts

Reference life time	20 years					
Product category	Power socket					
Installation elements	No special components needed					
Use scenario	Load rate: 50 % of In Use rate: 50% of the RLT					
Geographical representativeness	France, Greece, Hungary, Russia, Spain, Portugal, Ukraine					
Technological representativeness	The main purpose of the Mureva Styl - socket-outlet - 16A - 2P + E shutters - grey French standard product range is to give aaccess to Electricity till the plug.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Manufacturing plant: ELDA, Poland	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU- 27		

Compulsory indicators		MUREVA SC	PIN EARTH 16A	SCREWLESS	GREY - MUR	35031	
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.75E-05	1.74E-05	0*	0*	1.41E-07	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2.57E-02	2.08E-03	9.01E-05	0*	2.35E-02	3.76E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	1.70E-03	7.25E-04	2.08E-05	6.47E-05	8.80E-04	9.77E-06
Contribution to global warming	kg CO ₂ eq	3.79E+00	6.13E-01	1.97E-02	3.34E-02	3.10E+00	1.66E-02
Contribution to ozone layer depletion	kg CFC11 eq	8.07E-07	5.24E-08	0*	8.31E-11	7.54E-07	7.98E-10
Contribution to photochemical oxidation	kg C₂H₄ eq	1.34E-03	2.08E-04	6.43E-06	7.99E-06	1.11E-03	4.00E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	2.43E-02	1.62E-02	0*	0*	8.09E-03	1.62E-05
Total Primary Energy	MJ	7.56E+01	1.22E+01	2.79E-01	0*	6.29E+01	1.86E-01

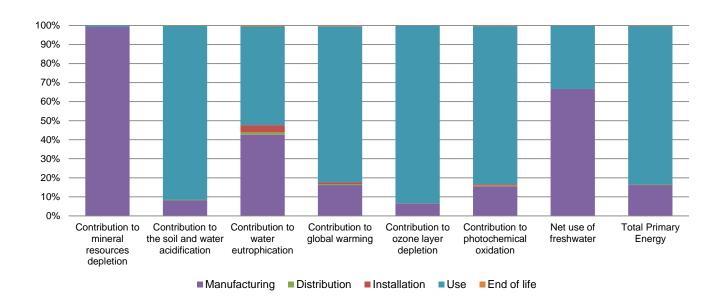

Optional indicators	MUREVA SO PIN EARTH 16A SCREWLESS GREY - MUR35031						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	4.19E+01	9.55E+00	2.77E-01	4.80E-03	3.20E+01	1.49E-01
Contribution to air pollution	m³	2.37E+02	1.01E+02	8.40E-01	1.15E-01	1.33E+02	1.33E+00
Contribution to water pollution	m³	1.96E+02	5.87E+01	3.25E+00	1.80E+00	1.30E+02	1.52E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.42E-03	1.42E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	5.27E+00	7.71E-01	0*	0*	4.50E+00	0*
Total use of non-renewable primary energy resources	MJ	7.03E+01	1.14E+01	2.79E-01	0*	5.84E+01	1.86E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.79E+00	2.91E-01	0*	0*	4.50E+00	0*
Use of renewable primary energy resources used as raw material	MJ	4.79E-01	4.79E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.51E+01	6.31E+00	2.79E-01	6.55E-03	5.84E+01	1.86E-01
Use of non renewable primary energy resources used as raw material	MJ	5.14E+00	5.14E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.45E+00	1.29E+00	0*	0*	0*	1.55E-01
Non hazardous waste disposed	kg	1.21E+01	5.11E-01	0*	2.42E-02	1.16E+01	0*
Radioactive waste disposed	kg	9.86E-03	3.92E-04	0*	0*	9.46E-03	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.17E-01	1.51E-02	0*	0*	0*	1.01E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.53E-03	0*	0*	0*	0*	1.53E-03
Exported Energy	MJ	5.30E-05	7.17E-06	0*	4.58E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1909008_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	09/2019	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS
Country Customer Care Center
http://www.schneider-electric.com/contact
35, rue Joseph Monier
CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

ENVPEP1909008_V1 © 2019 - Schneider Electric – All rights reserved 09/2019