




DIMENSIONS



ACCESSOIRES

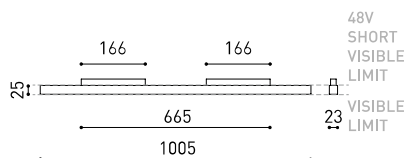

TRACK 48V OPTIONS

PRODUIT

Nom	LINE 1000 48V 3000K N
Référence	A3762011N
Coleur	Noir Mat
RAL	Anodisé, bain coloré, similaire à RAL 9005
Catégorie	TRACK LIGHTS

SOURCE DE LUMIÈRE

Type	LED
Flux lumineux brut	3200 lm
Température de couleur	3000 K
Stabilité chromatique	MacAdam Step 2
Indice de reproduction chromatique	CRI > 90
Puissance	21 W
Efficacité	152 lm/W
Durée de vie de la LED	L80B10 > 60.000h

LUMINAIRE | DONNÉES PHOTOMÉTRIQUES

Efficacité lumineuse	43%
Angle du faisceau lumineux	98°

LUMINAIRE | DONNÉES ÉLECTRIQUES

Valeurs de puissance du système	22,56 W
Tension	48Vdc
Variation d'intensité	Non Dim
Classe d'isolation électrique	II

D'AUTRES DONNÉES

Étanchéité	IP20
Contrôle sans fil	Veillez consulter
Type de rail	Track 48V
Poids	445 g
Poids avec emballage	795 g
Dimensions de l'emballage	Ø55 x 1050 mm
Unités par emballage	1
Matériaux	Aluminium / Polycarbonate

Line 48V est le luminaire à lumière diffuse linéaire pour application sur rail à basse tension de 48V. Cette solution transfère à ce système de rails les caractéristiques d'éclairage et les avantages de l'éclairage longitudinal avec un diffuseur pour les applications d'éclairage général.

DIAGRAMME POLAIRE




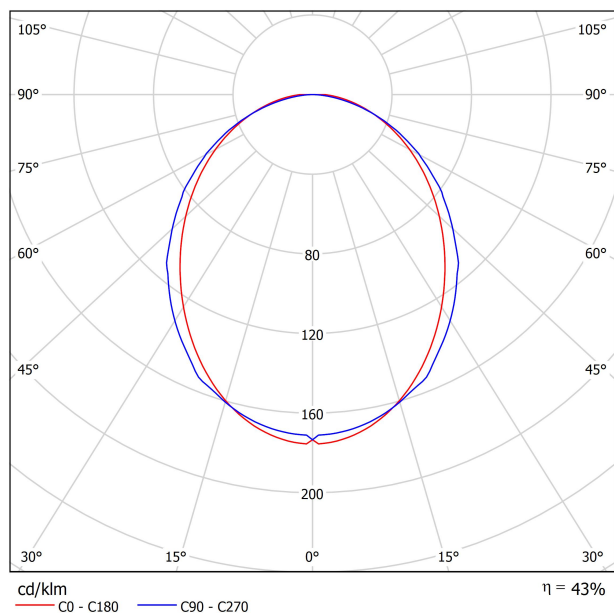


DIAGRAMME CONIQUE

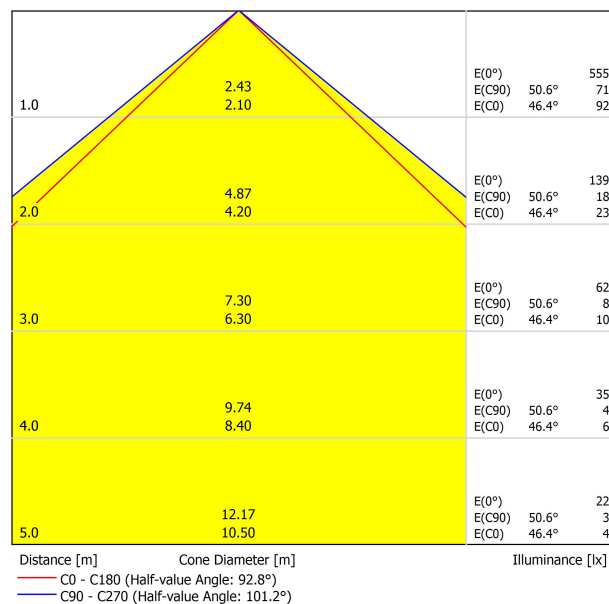

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	22.3	23.6	22.6	23.8	24.0	22.7	24.0	23.0	24.2	24.4	24.4
	3H	24.1	25.2	24.4	25.5	25.8	24.4	25.6	24.7	25.8	26.1	26.1
	4H	24.8	25.9	25.1	26.2	26.5	25.0	26.1	25.4	26.4	26.7	26.7
	6H	25.4	26.5	25.8	26.8	27.1	25.5	26.5	25.8	26.8	27.1	27.1
	8H	25.7	26.7	26.1	27.0	27.3	25.6	26.6	26.0	26.9	27.2	27.2
	12H	26.0	26.9	26.3	27.2	27.6	25.7	26.6	26.0	26.9	27.3	27.3
4H	2H	22.9	24.0	23.2	24.3	24.6	23.2	24.3	23.6	24.6	24.9	24.9
	3H	24.9	25.9	25.3	26.2	26.5	25.2	26.1	25.5	26.4	26.8	26.8
	4H	25.8	26.6	26.2	27.0	27.3	25.9	26.8	26.3	27.1	27.5	27.5
	6H	26.6	27.3	27.0	27.7	28.1	26.5	27.3	26.9	27.6	28.0	28.0
	8H	26.9	27.6	27.4	28.0	28.4	26.7	27.4	27.2	27.8	28.2	28.2
	12H	27.3	27.9	27.7	28.3	28.7	26.8	27.5	27.3	27.9	28.3	28.3
8H	4H	26.1	26.8	26.6	27.2	27.6	26.3	26.9	26.7	27.3	27.8	27.8
	6H	27.1	27.7	27.6	28.1	28.5	27.0	27.6	27.5	28.0	28.5	28.5
	8H	27.6	28.1	28.0	28.5	29.0	27.3	27.8	27.8	28.2	28.7	28.7
	12H	28.0	28.5	28.5	28.9	29.4	27.5	27.9	28.0	28.4	28.9	28.9
	4H	26.2	26.8	26.6	27.2	27.6	26.3	26.9	26.8	27.3	27.8	27.8
	6H	27.2	27.7	27.7	28.1	28.6	27.1	27.6	27.6	28.1	28.5	28.5
12H	8H	27.7	28.1	28.2	28.6	29.1	27.5	27.9	28.0	28.4	28.9	28.9
	12H	28.0	28.5	28.5	28.9	29.4	27.5	27.9	28.0	28.4	28.9	28.9
Variation of the observer position for the luminaires distances S												
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1					
S = 1.5H		+0.2 / -0.3					+0.2 / -0.3					
S = 2.0H		+0.3 / -0.7					+0.4 / -0.7					
Standard table		BK07					BK06					
Correction Summand		3.7					3.3					
Corrected Glare Indices referring to 3200lm Total Luminous Flux												




TRACK 48V TRIMLESS

TRACK 48V TRIMLESS 1m	A338-01-00- N WT
TRACK 48V TRIMLESS 2m	A338-02-00- N WT
TRACK 48V TRIMLESS 3m	A338-03-00- N WT
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00- N WT
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00- N WT

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm.
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE
INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING.




TRIMLESS INSTALLATION GUIDE
<https://youtu.be/tgGsQdaYe-w>



TRACK 48V SURFACE

TRACK 48V SURFACE 1m	A338-11-00- NT WT
TRACK 48V SURFACE 2m	A338-12-00- NT WT
TRACK 48V SURFACE 3m	A338-13-00- NT WT
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00- NT WT
TRACK 48V SURFACE T-Joint	A338-15-00- NT
TRACK 48V SURFACE X-Joint	A338-16-00- NT




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00- NT WT
TRACK 48V SURFACE SHORT 2m	A338-22-00- NT WT
TRACK 48V SURFACE SHORT 3m	A338-23-00- NT WT
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00- NT WT
TRACK 48V SURFACE SHORT T-Joint	A338-25-00- NT
TRACK 48V SURFACE SHORT X-Joint	A338-26-00- NT




COLOUR | N ■ RAL 9005 | NT ■ RAL 9005 | WT □ RAL 9016 |

TRACK 48V TRIMLESS Corner 90° One Plane




*Electrical connection not included


TRACK 48V TRIMLESS Corner 90° Two Planes




*Electrical connection not included

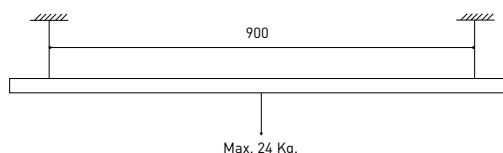


TRACK 48V SURFACE Corner 90° One Plane



T-Joint




X-Joint




Electrical connection not included | Straight joiner included


TRACK 48V SURFACE SHORT Corner 90° One Plane



T-Joint



X-Joint



Electrical connection not included | Straight joiner included

CONSTANT VOLTAGE LED POWER SUPPLY

	P	V	D (A x B x C)
0434-01-61* N W	100W	48V	298 x 19 x 16mm
0434-01-69* N W	250W	48V	268 x 22 x 44mm
0434-01-62	150W	48V	350 x 30 x 18mm
0434-01-80	250W	48V	400 x 40 x 22mm

220 V~ | *To be installed inside the track.


» 282

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		5	10	20	30
100	0,75	50	50	X	X
	1,5	50	50	40	25
150	0,75	40	15	X	X
	1,5	50	40	20	X
250	0,75	20	X	X	X
	1,5	35	20	X	X


LED POWER SUPPLY

0434-01-61




LED POWER SUPPLY

0434-01-69 **




LED POWER SUPPLY

0434-01-62



LED POWER SUPPLY


0434-01-80



**Not recommended for Track 48V Surface Short


COMPATIBILITY ACCORDING TO TYPE OF TRACK

TRACK 48V & TRACK 48V SURFACE SHORT

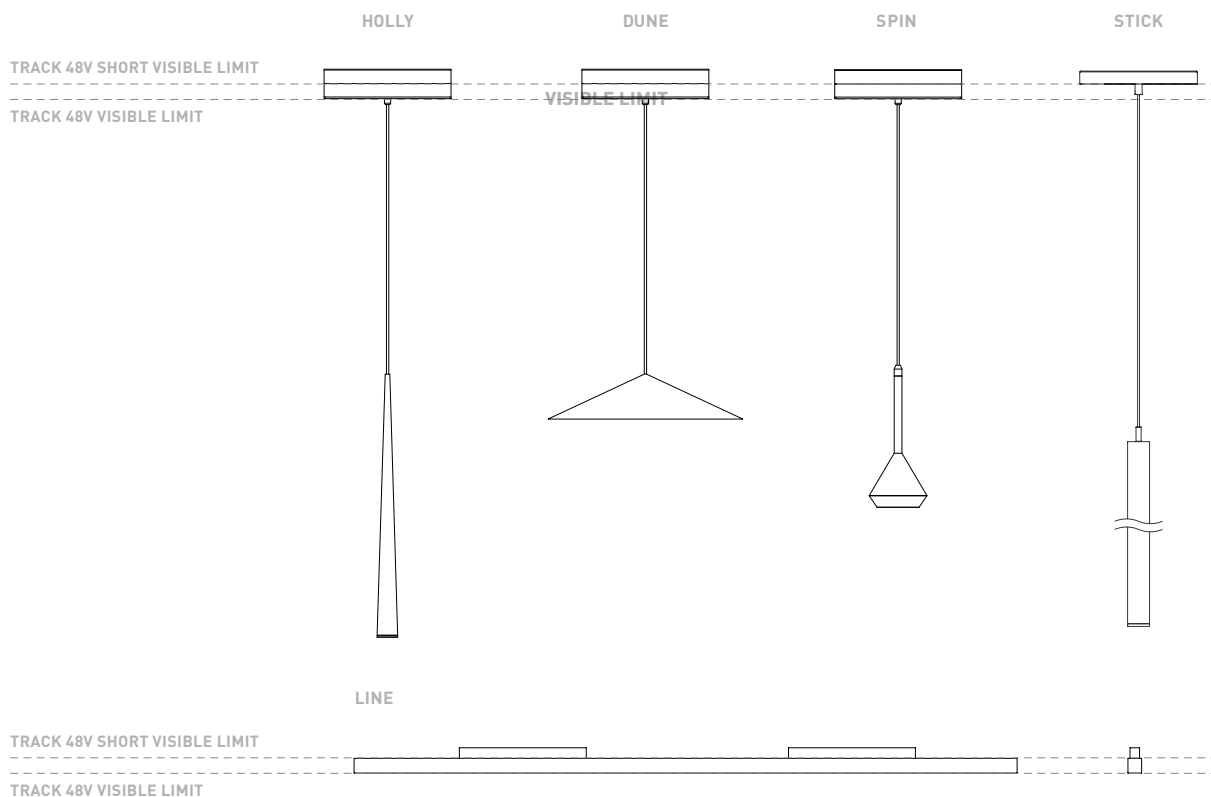


COLOUR | N ■ RAL 9005 |

ALL 48V TRACK




Live-End Connector 48V

A338-00-01- | N | W |




Central Connector 48V

A338-00-02- | N | W |



L-Joint Connector 48V


A338-00-12- | N | W |



Corner 90° Connector One Plane 48V


A338-00-24- | N | W |

*Not suitable for trimless version




T-Joint Connector 48V

A450-00-07- | N |



X-Joint Connector 48V

A450-00-08- | N |



Wireless Control 48V

0434-01-31- | N | W | Casambi/AAG Stucchi App



Cover Gap 1m 48V

A338-00-30- | N | W |

TRIMLESS 48V



Trimless T-Bracket 48V


A338-00-03



Trimless Clamp for M6 ROD 48V

A338-00-09

*See accessories quantities



Trimless Long T-Bracket 48V


A338-00-04



Trimless Track Clamp 48V

A338-00-10

*See accessories quantities



Trimless Straight Joiner 48V (2 Units)


A338-00-05- | N | WT |



Trimless Suspension Kit 48V

A338-00-08

*See accessories quantities



Trimless Plaster Installation Guard 1m 48V

A338-00-21

* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000mm - 2 Pcs.
2000mm - 3 Pcs.
3000mm - 4 Pcs.

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

TRIMLESS, SURFACE & SUSPENSION 48V



End 48V

A338-00-06- | NT | WT |



End feed 48V

A338-00-07- | NT | WT |

SURFACE & SUSPENSION SHORT 48V



Short End 48V


A338-00-18- | NT | WT |



Short End feed 48V

A338-00-19- | NT | WT |

SURFACE & SURFACE SHORT 48V



Power Supply Case 48V


A338-00-29- | NT | WT | 150 W

220 V ~
240



To be installed aside 48V Surface Tracks


INCL



Surface Straight Joiner 48V

A338-00-11

SUSPENSION & SUSPENSION SHORT 48V



Wired Power Supply Case 48V


A338-00-25- | NT | WT | 150 W NO DIM

A338-00-26- | NT | WT | 150 W DIM

220 V ~
240




INCL



Suspension Kit 48V [2 units]

A338-00-15- | NT | WT |



Suspension Feed Kit 48V

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM


For remote power supply

A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track

WIRE TRIMLESS ACCESSORIES




FEED

MAINS TRIMLESS*

A023-00-01- | W | N | NO DIM

MAINS THICK TRIMLESS*

A023-00-02- | W | N | DIM




FASTENING

STEEL CABLE TRIMLESS*


A023-00-05- | W | N |




MAINS TRIMLESS



MAINS THICK TRIMLESS




STEEL CABLE TRIMLESS



COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann


INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
Cut the power supply to the luminaire
Couper l'alimentation du luminaire
Interrompere l'alimentazione dell'apparecchio
Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
Remove light source(s) for disposal
Retirer la (les) source(s) lumineuse(s) pour l'élimination
Rimuovere la/le sorgente/e di luce per lo smaltimento
Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
Remove the battery for decommissioning
Retirer la batterie pour sa mise au rebut
Rimuovere la batteria per la dismissione
Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
Remove control gear for disposal
Retirer le dispositif de commande pour l'élimination
Rimuovere l'alimentatore per lo smaltimento
Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE
Send the materials to a WEEE collection centre
Envoyer les matériaux dans une déchetterie DEEE
Inviare i materiali ad un centro di raccolta RAEE
Die Materialien in einem WEEE-Zentrum entsorgen

