Product Environmental Profile

THALASSA PLS










General information

Representative product	THALASSA PLS - NSYPLS2736G				
Description of the product	The main purpose of the product is to protect, integrate and allow the fastening of electric, electronic or mechanical devices and accessories for modular distribution. This product consists of: Insulating modular dimension boxes, allowing creation of assemblies, with polyester body and two different heights covers. These covers are made of transparent polycarbonate or opaque polycarbonate or polyester. The closure can be through 4, 6 or 8 points depending on the box size. This closure can be manual or also with slot or triangular screws.				
Functional unit	Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure having the following dimensions H270mm x W360mm x D180mm, while protecting against mechanical impacts (IK09-IEC 62262) and the penetration of solid objects and liquids (IP66-IEC 60529).				

Constituent materials

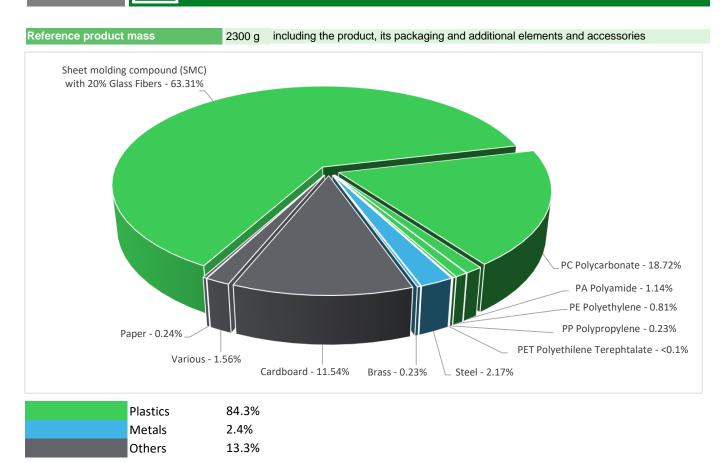

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

The THALASSA PLS presents the following relevent environmental aspects					
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified				
	Weight and volume of the packaging optimized, based on the European Union's packaging directive				
Distribution	Packaging weight is 277.4 g, consisting of Cardboard (93.32%), PE-LD (4.77%) and Paper (1.91%)				
	Product distribution optimised by setting up local distribution centres				
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).				
Use	The product does not require special maintenance operations.				
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials				
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.				
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 23% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).				

Environmental impacts

Reference life time	20 years					
Product category	Unequipped enclosures and cabinets					
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.					
Use scenario	Non applicable for unequipped enclosures and cabinets					
Geographical representativeness	Europe					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Spain	Not Applicable	Not Applicable	Not Applicable		

THALASSA PLS - NSYPLS2736G						
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
kg Sb eq	7.15E-05	7.14E-05	1.19E-08	0*	0*	0*
kg SO ₂ eq	1.99E-02	1.79E-02	1.35E-03	6.47E-05	0*	6.16E-04
kg PO ₄ ³⁻ eq	4.74E-03	4.22E-03	3.12E-04	1.96E-05	0*	1.93E-04
kg CO ₂ eq	1.25E+01	1.17E+01	2.97E-01	1.56E-02	0*	4.24E-01
kg CFC11 eq	1.15E-06	1.14E-06	6.01E-10	0*	0*	1.45E-08
kg C ₂ H ₄ eq	2.93E-03	2.77E-03	9.67E-05	4.85E-06	0*	6.25E-05
Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
m3	6.92E-02	6.88E-02	2.66E-05	0*	0*	3.09E-04
MJ	1.66E+02	1.59E+02	4.20E+00	2.02E-01	0*	2.91E+00
	Unit kg Sb eq kg SO ₂ eq kg PO ₄ ³⁻ eq kg CO ₂ eq kg CFC11 eq kg C ₂ H ₄ eq Unit m3	Unit Total kg Sb eq 7.15E-05 kg SO ₂ eq 1.99E-02 kg PO ₄ 3 - eq 4.74E-03 kg CO ₂ eq 1.25E+01 kg CFC11 1.15E-06 kg C ₂ H ₄ eq 2.93E-03 Unit Total m3 6.92E-02	Unit Total Manufacturing kg Sb eq 7.15E-05 7.14E-05 kg SO ₂ eq 1.99E-02 1.79E-02 kg PO ₄ ³⁻ eq 4.74E-03 4.22E-03 kg CO ₂ eq 1.25E+01 1.17E+01 kg CFC11 eq 1.15E-06 1.14E-06 kg C ₂ H ₄ eq 2.93E-03 2.77E-03 Unit Total Manufacturing m3 6.92E-02 6.88E-02	Unit Total Manufacturing Distribution kg Sb eq 7.15E-05 7.14E-05 1.19E-08 kg SO ₂ eq 1.99E-02 1.79E-02 1.35E-03 kg PO ₄ ³⁻ eq 4.74E-03 4.22E-03 3.12E-04 kg CO ₂ eq 1.25E+01 1.17E+01 2.97E-01 kg CFC11 eq 1.15E-06 1.14E-06 6.01E-10 kg C ₂ H ₄ eq 2.93E-03 2.77E-03 9.67E-05 Unit Total Manufacturing Distribution m3 6.92E-02 6.88E-02 2.66E-05	Unit Total Manufacturing Distribution Installation kg Sb eq 7.15E-05 7.14E-05 1.19E-08 0* kg SO ₂ eq 1.99E-02 1.79E-02 1.35E-03 6.47E-05 kg PO ₄ ³ eq 4.74E-03 4.22E-03 3.12E-04 1.96E-05 kg CO ₂ eq 1.25E+01 1.17E+01 2.97E-01 1.56E-02 kg CFC11 eq 1.15E-06 1.14E-06 6.01E-10 0* kg C ₂ H ₄ eq 2.93E-03 2.77E-03 9.67E-05 4.85E-06 Unit Total Manufacturing Distribution Installation m3 6.92E-02 6.88E-02 2.66E-05 0*	Unit Total Manufacturing Distribution Installation Use kg Sb eq 7.15E-05 7.14E-05 1.19E-08 0* 0* kg SO2 eq 1.99E-02 1.79E-02 1.35E-03 6.47E-05 0* kg PO $_4$ 3* eq 4.74E-03 4.22E-03 3.12E-04 1.96E-05 0* kg CO2 eq 1.25E+01 1.17E+01 2.97E-01 1.56E-02 0* kg CFC11 eq 1.15E-06 1.14E-06 6.01E-10 0* 0* kg C $_2$ H $_4$ eq 2.93E-03 2.77E-03 9.67E-05 4.85E-06 0* Unit Total Manufacturing Distribution Installation Use m3 6.92E-02 6.88E-02 2.66E-05 0* 0*

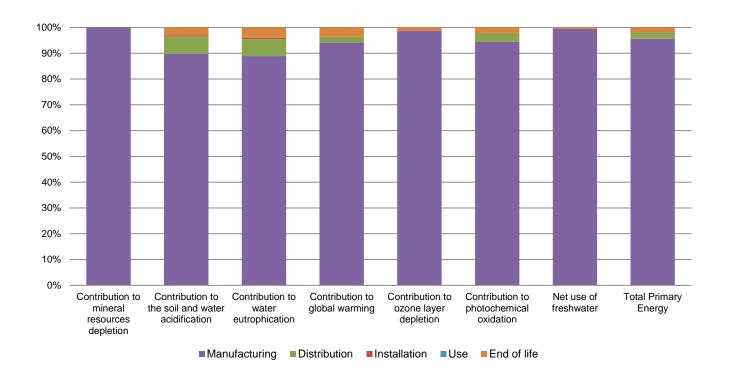

Optional indicators		THALASSA PLS - NSYPLS2736G					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	9.96E+01	9.29E+01	4.17E+00	1.99E-01	0*	2.34E+00
Contribution to air pollution	m³	1.34E+03	1.30E+03	1.26E+01	7.12E-01	0*	2.15E+01
Contribution to water pollution	m³	3.53E+03	3.45E+03	4.88E+01	2.33E+00	0*	2.82E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.42E-03	6.42E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.09E+00	3.08E+00	5.59E-03	6.04E-04	0*	3.20E-03
Total use of non-renewable primary energy resources	MJ	1.63E+02	1.56E+02	4.19E+00	2.01E-01	0*	2.91E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	-2.15E+00	-2.16E+00	0*	0*	0*	0*
Use of renewable primary energy resources used as raw material	MJ	5.23E+00	5.23E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.27E+02	1.19E+02	4.19E+00	2.01E-01	0*	2.91E+00
Use of non renewable primary energy resources used as raw material	MJ	3.65E+01	3.65E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	9.64E+00	6.16E+00	0*	0*	0*	3.49E+00
Non hazardous waste disposed	kg	1.03E+01	1.03E+01	1.05E-02	1.25E-02	0*	8.89E-03
Radioactive waste disposed	kg	2.43E-03	2.41E-03	7.51E-06	7.47E-07	0*	1.43E-05
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	9.41E-01	2.21E-01	0*	2.67E-01	0*	4.53E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	7.83E-02	0*	0*	0*	0*	7.83E-02
Exported Energy	MJ	8.35E-04	7.85E-05	0*	7.57E-04	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

SCHN-00100-V02.01-EN - PEP ECOPASSPORT® - THALASSA PLS

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00100-V02.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02	
Verifier accreditation N°	VH39	Supplemented by	PSR-0005-ed2-EN-2016 03 29	
Date of issue	04/2022	Information and reference documents	www.pep-ecopassport.org	
		Validity period	5 years	
Independent verification of the declaration and data, in compliance with ISO 14025: 2010				

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1 :2016

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00100-V02.01-EN © 2019 - Schneider Electric – All rights reserved

04/2022