
# **Product Environmental Profile**

#### **Steel floor-standing enclosure**






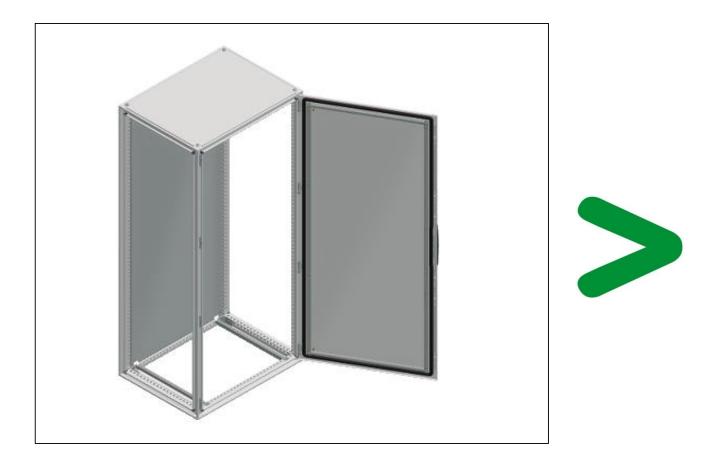

Representative product	Steel floor-standing enclosure - NSYSF20860P				
Description of the product	The main purpose of the Steel Floor-Standing Enclosures is to protect electrical equipment of low- voltage switchgear and control gear assemblies.				
Functional unit	Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure with dimensions 2000mmx800mmx600mm, while protecting against mechanical impacts (IK10) and the penetration of solid objects and liquids (IP66).				

#### Constituent materials

Conoral information

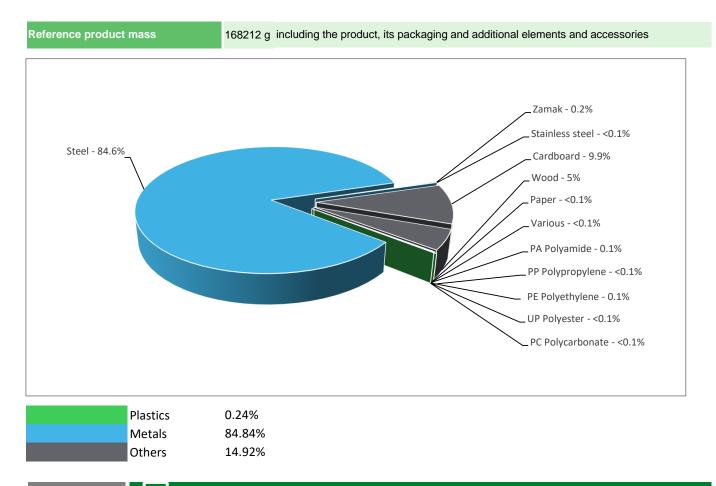

### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>


# Additional environmental information

The Steel floor-standing enclosure presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 24212.1 g, consisting of Cardboard(65.9%), Wood(33.238%), PE Polyethylene(0.6%), Paper(0.22%), PP Polypropylene(0.035%) & PC Polycarbonate(0.007%)					
	Product distribution optimised by setting up local distribution centres					
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
End of life	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method"   Recyclability potential: 94%   Based on "ECO'DEEE recyclability and recoverability calculation method"   (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

## *O* Environmental impacts

Reference life time	20 years					
Product category	Unequipped enclosures and cabinets					
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.					
Use scenario	Non applicable for unequipped enclosures and cabinets					
Geographical representativeness	Europe, MiddleEast					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: France	Not Applicable	Not Applicable	Not Applicable		

Compulsory indicators	Steel floor-standing enclosure - NSYSF20860P						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	6.30E-03	6.30E-03	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.28E+00	1.23E+00	5.77E-03	8.03E-03	0*	3.95E-02
Contribution to water eutrophication	kg PO4 <sup>3-</sup> eq	1.39E-01	1.25E-01	1.33E-03	3.03E-03	0*	9.28E-03
Contribution to global warming	kg CO <sub>2</sub> eq	4.85E+02	4.61E+02	1.26E+00	9.40E+00	0*	1.28E+01
Contribution to ozone layer depletion	kg CFC11 eq	6.21E-06	5.37E-06	2.56E-09	1.97E-08	0*	8.18E-07
Contribution to photochemical oxidation	kg $C_2H_4$ eq	1.80E-01	1.73E-01	4.12E-04	2.24E-03	0*	4.27E-03
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.44E+00	3.42E+00	0*	2.38E-03	0*	1.56E-02
Total Primary Energy	MJ	2.88E+04	2.86E+04	1.79E+01	2.06E+01	0*	1.99E+02

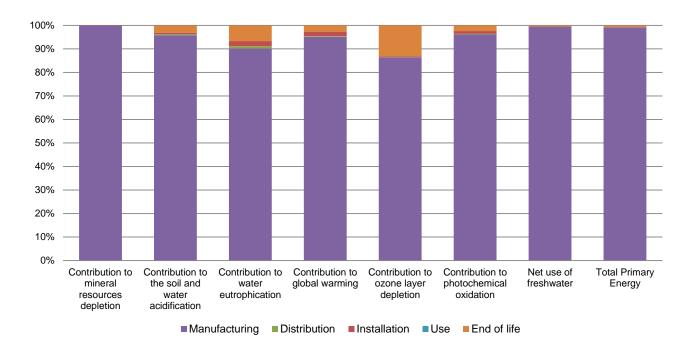

Optional indicators		Steel floor-s	tanding enclosure	e - NSYSF2086	60P		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	4.46E+03	4.26E+03	1.78E+01	1.97E+01	0*	1.60E+02
Contribution to air pollution	m³	6.94E+04	6.77E+04	5.38E+01	2.36E+02	0*	1.40E+03
Contribution to water pollution	m³	1.27E+04	1.07E+04	2.08E+02	2.23E+02	0*	1.50E+03
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.67E+01	6.67E+01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.18E+02	2.17E+02	2.38E-02	2.09E-01	0*	2.23E-01
Total use of non-renewable primary energy resources	MJ	2.86E+04	2.83E+04	1.79E+01	2.04E+01	0*	1.99E+02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.08E+00	6.22E-01	2.38E-02	2.09E-01	0*	2.23E-01
Use of renewable primary energy resources used as ray material	<sup>v</sup> MJ	2.17E+02	2.17E+02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.86E+04	2.83E+04	1.79E+01	2.04E+01	0*	1.99E+02
Use of non renewable primary energy resources used as raw material	MJ	1.48E+01	1.48E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.67E+02	3.21E+02	0*	0*	0*	1.46E+02
Non hazardous waste disposed	kg	1.84E+02	1.77E+02	4.49E-02	6.54E+00	0*	6.14E-01
Radioactive waste disposed	kg	2.34E-02	2.21E-02	3.20E-05	2.46E-04	0*	9.41E-04
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.63E+02	1.53E+01	0*	1.84E+01	0*	1.29E+02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.17E-02	0*	0*	0*	0*	1.17E-02
Exported Energy	MJ	5.56E+00	5.22E-01	0*	5.03E+00	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00625-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02			
Verifier accreditation N°	VH39	Supplemented by	PSR-0005-ed2-EN-2016 03 29			
Date of issue	12/2020	Information and reference documents	www.pep-ecopassport.org			
		Validity period	5 years			
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010						
Internal	External X					
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)						
PEP are compliant with XP C08-100-1 :2016						
The elements of the present PEP cannot be compared with elements from another program.						
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »						

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00625-V01.01-EN

Published by Schneider Electric © 2019 - Schneider Electric – All rights reserved

12/2020