
# **Product Environmental Profile**

New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45 Keystone/Systimax 4M







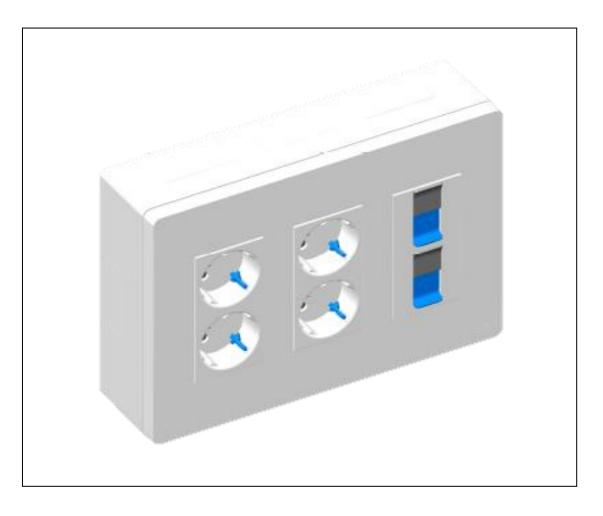

**Functional unit** 

#### **General information**

Representative product

New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45


Keystone/Systimax 4M - NU306718A

Description of the product

The main function of the Heidi socket is to allow users to connect and disconnect the plug of an electrical load or the source of a signal from a network.

Connect/Disconnect during 20 years the plug of a load consuming 16A under a voltage of 250V while protecting the user from direct contact with live parts.

## Constituent materials

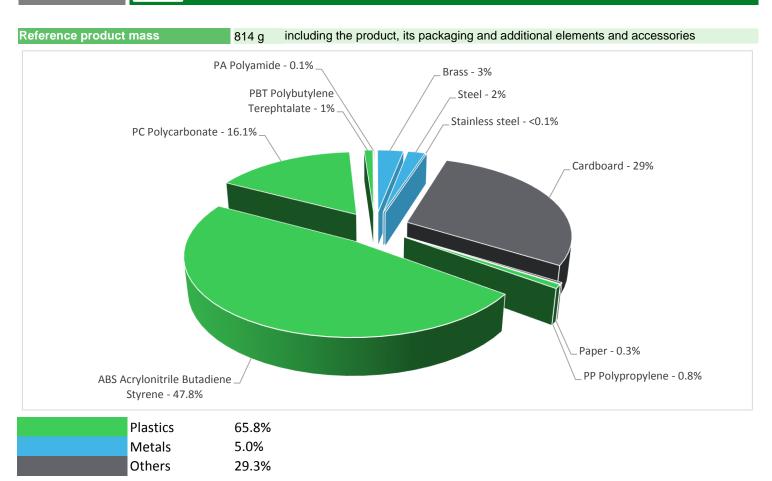

## **E** | Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>

# (19) Additional environmental information


The New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45 Keystone/Systimax 4M presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 98.4 g, consisting of cardboard (94.08%), PE film (3.45%), paper (2.45%)					
	Product distribution optimised by setting up local distribution centres					
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).					
Use	The product does not require special maintenance operations.					
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method"  Recyclability potential: 65% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

# **Environmental impacts**

Reference life time	20 years						
Product category	Power socket						
Installation elements	No special components needed						
Use scenario	Load rate: 50 % of In=0.352 Use rate: 50% of the RLT=20						
Geographical representativeness	Spain, Russia, France						
Technological representativeness	The main function of the Heidi socket is to allow users to connect and disconnect the plug of an electrical load or the source of a signal from a network.						
	Manufacturing	Installation	Use	End of life			
Energy model used	Plant location: PLR, Spain	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27			

Compulsory indicators		New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45 Keystone/Systimax 4M - NU306718A						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to mineral resources depletion	kg Sb eq	5.06E-05	5.03E-05	0*	0*	3.28E-07	0*	
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2.81E-02	1.16E-02	4.81E-04	6.93E-06	1.58E-02	2.13E-04	
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	9.82E-03	8.46E-03	1.11E-04	2.42E-04	9.51E-04	5.67E-05	
Contribution to global warming	$kg CO_2 eq$	7.64E+00	3.53E+00	1.05E-01	1.26E-01	3.78E+00	9.99E-02	
Contribution to ozone layer depletion	kg CFC11 eq	4.78E-07	2.27E-07	2.13E-10	3.15E-10	2.46E-07	4.68E-09	
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2.03E-03	1.08E-03	3.43E-05	3.01E-05	8.66E-04	2.24E-05	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Net use of freshwater	m3	1.41E+01	3.68E-01	0*	0*	1.37E+01	0*	
Total Primary Energy	MJ	1.59E+02	8.07E+01	1.49E+00	2.62E-02	7.54E+01	1.05E+00	

# SCHN-00356-V01.01-EN - PEP ECOPASSPORT® - New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45 Keystone/Systimax 4M

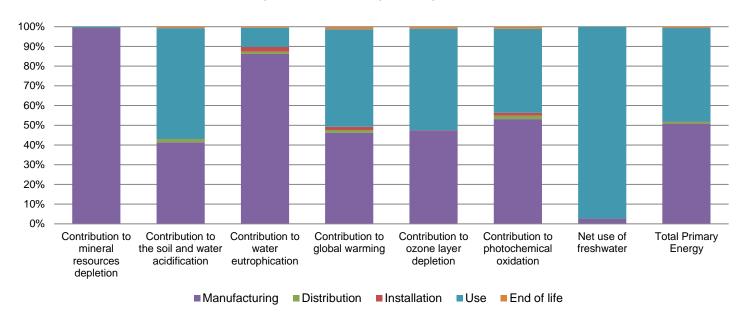

Optional indicators	New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45 Keystone/Systimax 4M - NU306718A						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.15E+02	6.92E+01	1.48E+00	2.41E-02	4.29E+01	9.54E-01
Contribution to air pollution	m³	4.70E+02	2.95E+02	4.48E+00	4.77E-01	1.63E+02	7.51E+00
Contribution to water pollution	m³	1.29E+03	1.10E+03	1.73E+01	6.70E+00	1.56E+02	8.75E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	5.71E-03	5.71E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.63E+01	6.72E+00	1.98E-03	0*	9.59E+00	0*
Total use of non-renewable primary energy resources	MJ	1.42E+02	7.40E+01	1.49E+00	2.61E-02	6.58E+01	1.04E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.15E+01	1.87E+00	1.98E-03	0*	9.59E+00	1.16E-03
Use of renewable primary energy resources used as raw material	MJ	4.85E+00	4.85E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.20E+02	5.15E+01	1.49E+00	2.61E-02	6.58E+01	1.04E+00
Use of non renewable primary energy resources used as raw material	MJ	2.25E+01	2.25E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.95E+00	3.98E+00	0*	0*	1.97E-03	9.70E-01
Non hazardous waste disposed	kg	1.75E+01	3.27E+00	3.74E-03	9.24E-02	1.41E+01	3.21E-03
Radioactive waste disposed	kg	1.18E-02	2.37E-03	2.66E-06	0*	9.40E-03	5.02E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5.02E-01	3.73E-02	0*	0*	0*	4.64E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.87E-02	1.58E-03	0*	6.30E-03	0*	1.08E-02
Exported Energy	MJ	1.34E-03	0*	0*	1.34E-03	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.7.0.3, database version 2016-11 in compliance with ISO14044.

The Modify manually the text to mention the equal impacting phases phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

# SCHN-00356-V01.01-EN - PEP ECOPASSPORT® - New Unica 2x double German socket outlet 2P+E screws/IPT and centre plate for 2xRJ45 Keystone/Systimax 4M

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number: SCHN-00356-V01.01-EN

Verifier accreditation N°

VH33

Drafting rules

Supplemented by

PSR-0005-ed2-EN-2016 03 29

Information and reference documents

Validity period

Supplemented by

PSR-0005-ed2-EN-2016 03 29

Verifier accreditation N°

VH33

Supplemented by

PSR-0005-ed2-EN-2016 03 29

Verifier accreditation N°

VH33

Supplemented by

Validity period

Supplemented by

Validity period

Supplemented by

Validity period

Supplemented by

Verifier accreditation N°

VH33

Supplemented by

Verifier accreditation N°

VH33

Supplemented by

Verifier accreditation N°

VH33

Supplemented by

Verifier accreditation and reference documents

Validity period

Supplemented by

Verifier accreditation N°

VH33

Verifier accreditation N°

VH33

Supplemented by

Verifier accreditation and reference documents

Validity period

Supplemented by

Verifier accreditation N°

VH33

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

nternal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1:2014

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact 35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

SCHN-00356-V01.01-EN © 2017 - Schneider Electric – All rights reserved

05/2018