


Product Environmental Profile

SHUTTER CONTROL RELAY SWITCH WITH BLE CONNECTIVITY



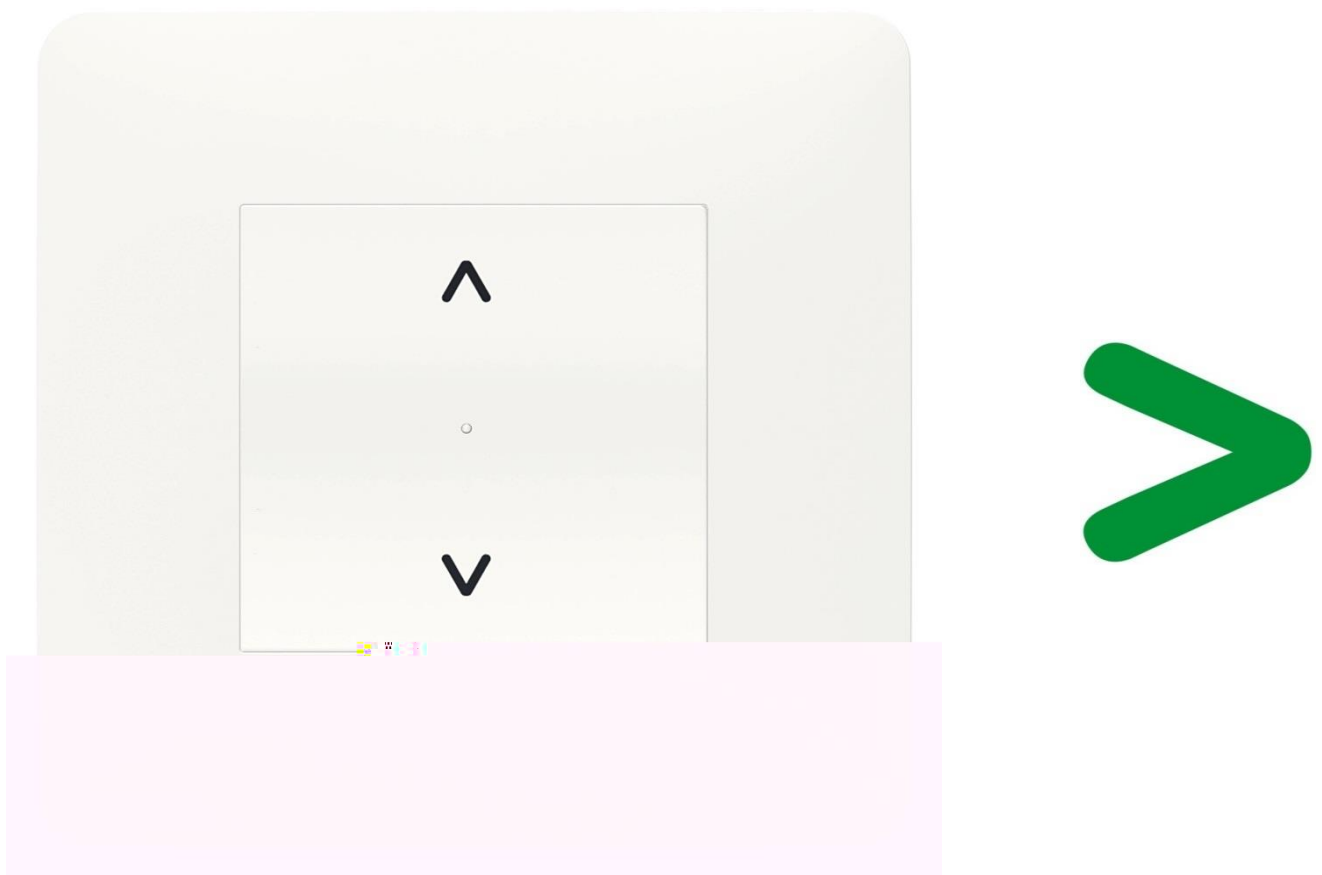


General information

Representative product	SHUTTER CONTROL RELAY SWITCH WITH BLE CONNECTIVITY - NU350818
Description of the product	The main function of product is to control blinds and shutters.
Functional unit	Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current 4A, including any conditions specified for overload in operation characterized by the current 10A, for the operating voltage 230V and a current for short-circuit 10A for a specified time.



Constituent materials

Reference product mass 174,5 g including the product, its packaging and additional elements and accessories

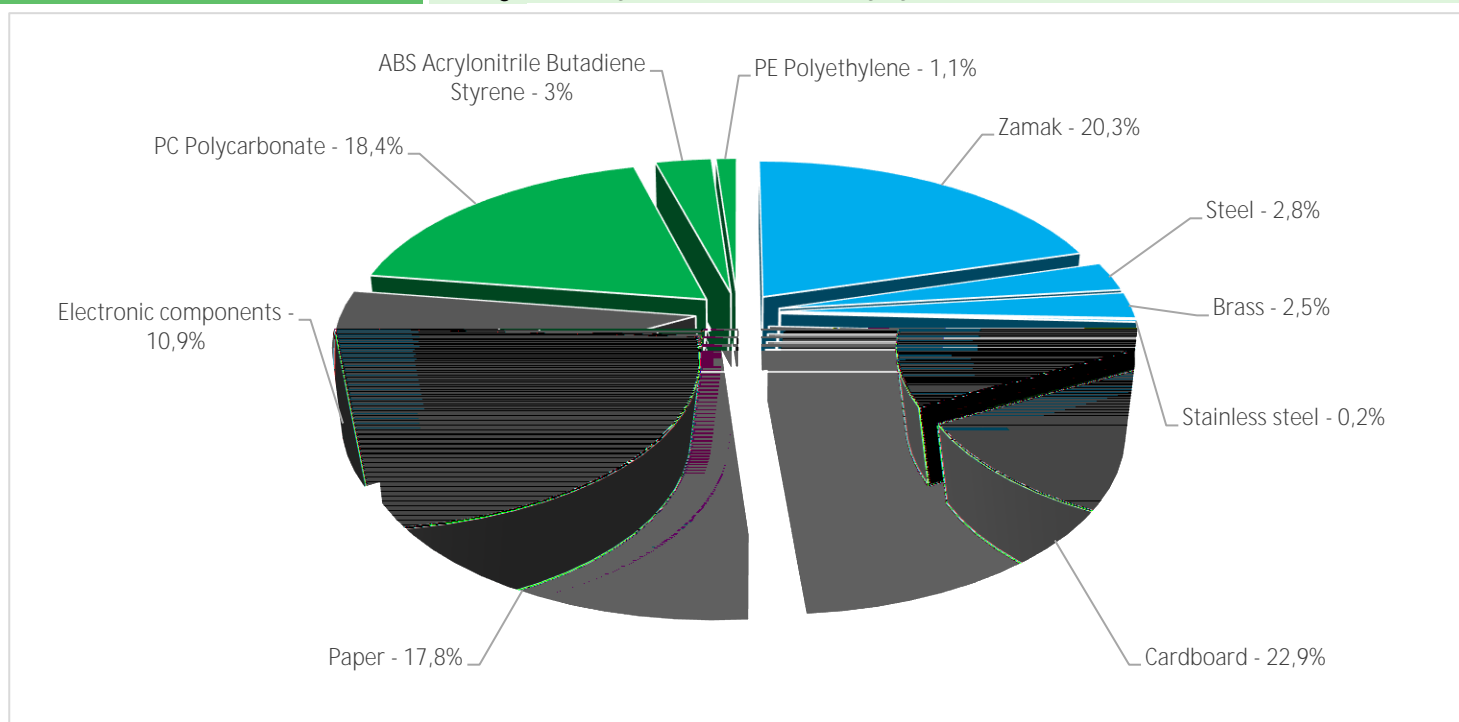



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive


As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

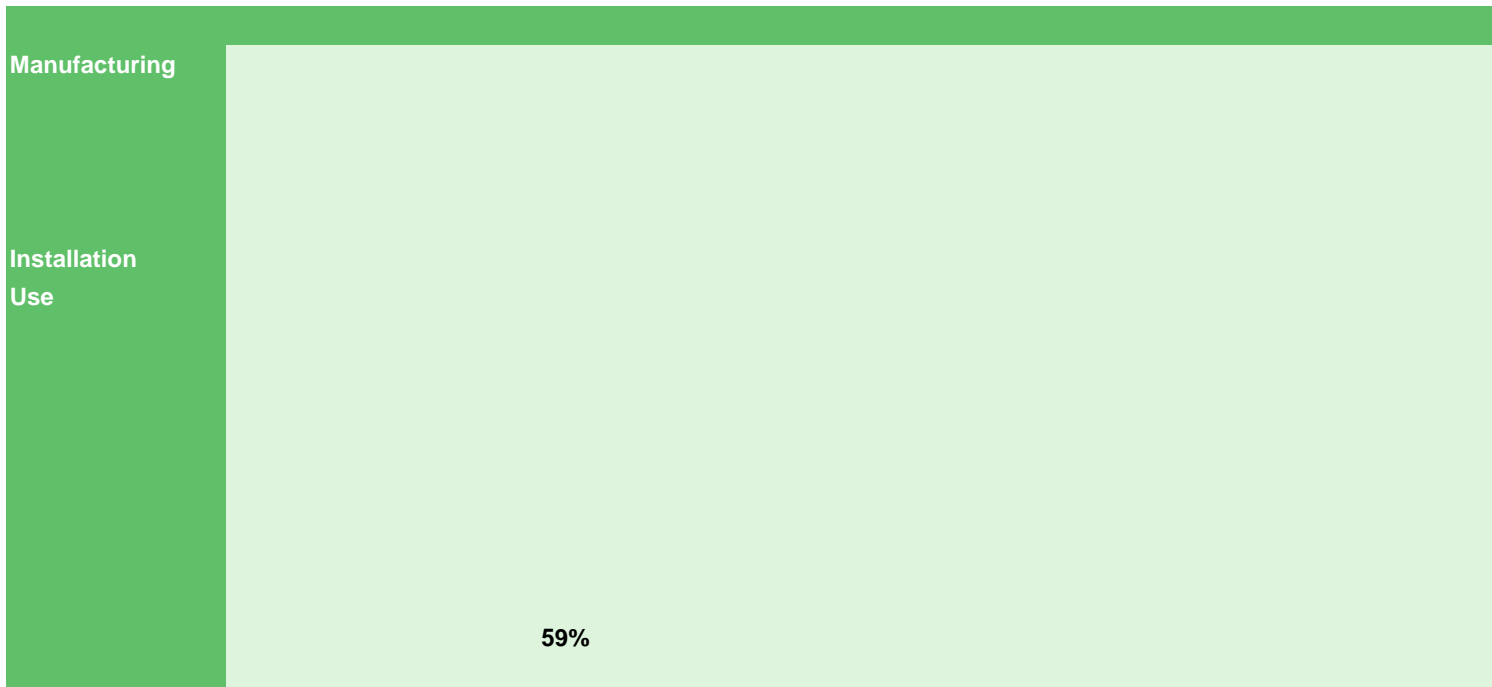

	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
	kg Sb eq	1,20E-03	1,20E-03	0*	0*	4,68E-06	0*
	kg SO ₂ eq	2,25E-01	3,16E-03	1,03E-04	0*	2,21E-01	5,59E-05
	kg PO ₄ ³⁻ eq	1,60E-02	2,42E-03	2,37E-05	3,17E-05	1,35E-02	1,94E-05
	kg CO ₂ eq	5,59E+01	1,78E+00	2,25E-02	1,65E-02	5,40E+01	4,74E-02
	kg CFC11 eq	3,67E-06	2,24E-07	0*	0*	3,45E-06	1,90E-09
	kg C ₂ H ₄ eq	1,26E-02	3,26E-04	7,33E-06	3,94E-06	1,22E-02	5,45E-06
	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
	m ³	1,95E+02					

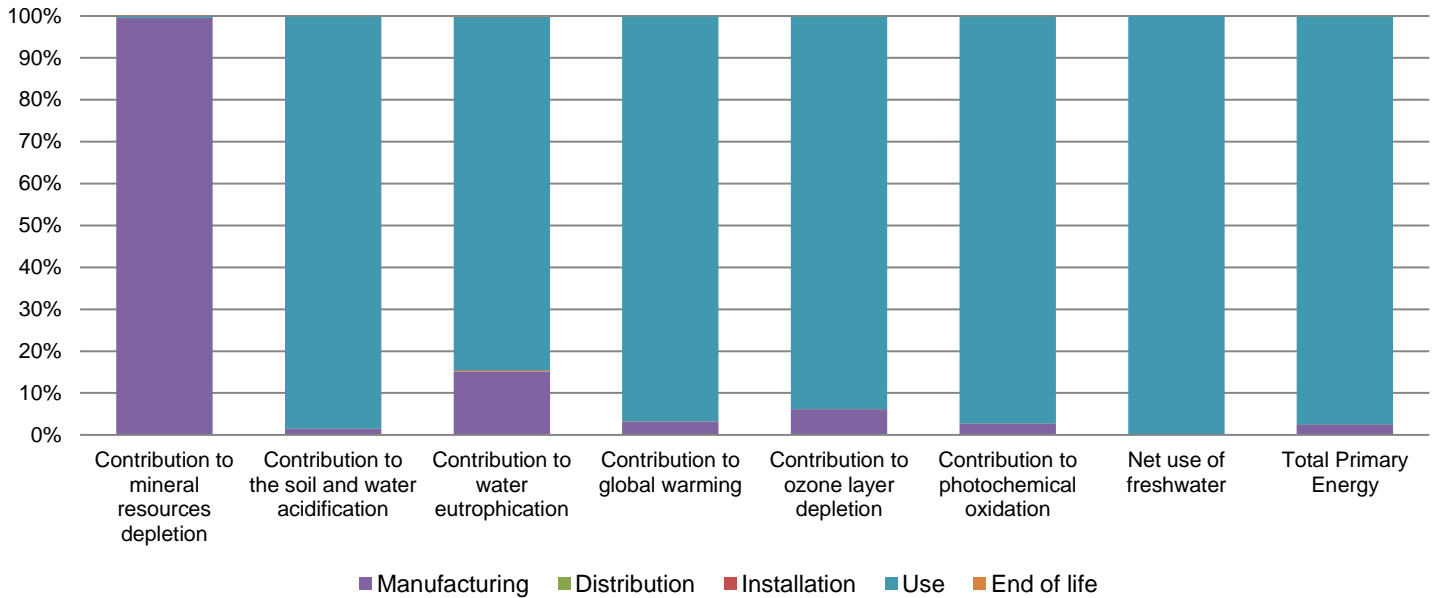

Optional indicators		SHUTTER CONTROL RELAY SWITCH WITH BLE CONNECTIVITY - NU350818						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	6,35E+02	2,23E+01	3,16E-01	0*	6,12E+02	2,41E-01	
Contribution to air pollution	m ³	2,70E+03	3,85E+02	9,58E-01	0*	2,31E+03	1,88E+00	
Contribution to water pollution	m ³	2,43E+03	1,91E+02	3,70E+00	8,51E-01	2,23E+03	2,81E+00	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	7,30E-02	7,30E-02	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	1,40E+02	2,75E+00	0*	0*	1,37E+02	0*	
Total use of non-renewable primary energy resources	MJ	9,63E+02	2,44E+01	3,18E-01	0*	9,38E+02	2,62E-01	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,40E+02	2,75E+00	0*	0*	1,37E+02	0*	
Use of renewable primary energy resources used as raw material	MJ	0,00E+00	0*	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	9,61E+02	2,27E+01	3,18E-01	0*	9,38E+02	2,62E-01	
Use of non renewable primary energy resources used as raw material	MJ	1,76E+00	1,76E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	2,87E+00	2,60E+00	0*	0*	2,83E-02	2,46E-01	
Non hazardous waste disposed	kg	2,02E+02	8,94E-01	0*	0*	2,01E+02	0*	
Radioactive waste disposed	kg	1,34E-01	3,83E-04	0*	0*	1,33E-01	0*	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	1,10E-01	1,50E-02	0*	0*	0*	9,47E-02	
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	1,04E-02	2,72E-04	0*	0*	0*	1,01E-02	
Exported Energy	MJ	1,83E-02	1,78E-02	0*	5,79E-04	0*	0*	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00320-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	05/2018	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2014			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS

Country Customer Care Center

<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

, 4, 7 : . 47

www.schneider-electric.com

Published by Schneider Electric

SCHN-00320-V01.01-EN

/ - . * P B

05/2018