
Product Environmental Profile

SSRH••• Heatsink, Panel Mount-SSR series







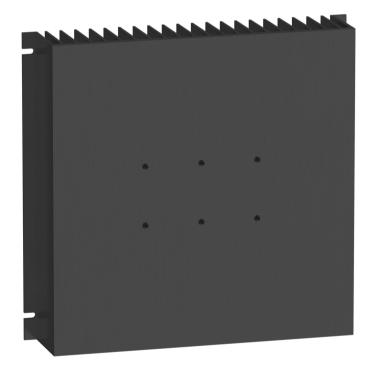


General information

Representative product	Heatsink, Panel Mount-SSR series -SSRHP02				
Description of the product	The product is a passive heat radiator that transfers the heat generated by the Solid State Relay away from the source, thereby allowing regulation of the relay temperature at the optimal levels to improve product performance.				
Description of the range	The range consists of heatsink for SSR series designed with panel mounting and holes for direct mounting and provided with different sizes to cater for different number of SSR relay mounting. The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.				
Functional unit	To provide effective heat dissipation for Solid State Relay through convection in order to keep it working at its optimum operating temperature. during 20 years with a 30% use rate, in compliance with French standards.				

Constituent materials

Reference product mass

3048.3 g including the product, its packaging and additional elements and accessories

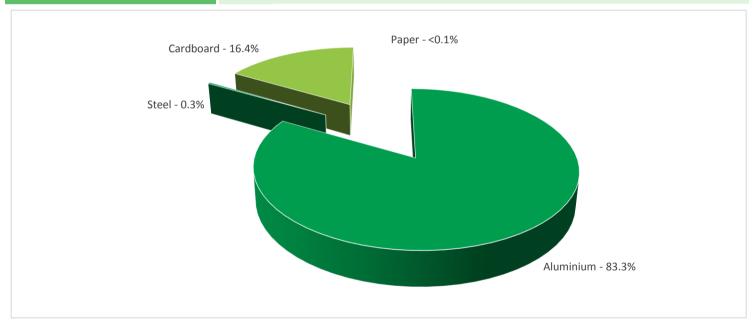

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

The Heatsink, Panel Mount-SSR series presents the following relevent environmental aspects							
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified						
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive						
	Packaging weight is 499 g, consisting of cardboard (99.96%), Paper (0.04%)						
	Product distribution optimised by setting up local distribution centres						
Installation	Ref SSRHP02 does not require any installation operations						
Use	The product does not require special maintenance operations.						
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials						
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.						
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 70% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).						

Environmental impacts

Reference life time	20 years					
Product category	Enclosures					
Installation elements	No special components needed					
Use scenario	This product does not have any energy consumption					
Geographical representativeness	World					
Technological representativeness	The product is a passive heat radiator that transfers the heat generated by the Solid State Relay away from the source, thereby allowing regulation of the relay temperature at the optimal levels to improve product performance.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Mexico	0	0	0		

Compulsory indicators	Heatsink, Panel Mount-SSR series - SSRHP02						
et indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
bution to mineral resources depletion	kg Sb eq	1.65E-05	1.65E-05	1.57E-08	0*	0*	7.56E-09
bution to the soil and water acidification	$kg SO_2 eq$	3.07E-01	3.04E-01	1.80E-03	1.50E-04	0*	7.40E-04
bution to water eutrophication	kg PO ₄ ³⁻ eq	5.75E-02	5.69E-02	4.14E-04	3.54E-05	0*	1.74E-04
bution to global warming	$kg CO_2 eq$	4.08E+01	4.01E+01	3.93E-01	4.78E-02	0*	2.39E-01
bution to ozone layer depletion	kg CFC11 eq	7.20E-06	7.18E-06	7.97E-10	3.93E-09	0*	1.64E-08
bution to photochemical oxidation	kg C₂H₄ eq	1.56E-02	1.54E-02	1.28E-04	1.57E-05	0*	7.95E-05
ırces use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
se of freshwater	m3	3.64E-01	3.64E-01	0*	5.84E-05	0*	2.92E-04
Primary Energy	MJ	5.57E+02	5.47E+02	5.56E+00	7.40E-01	0*	3.71E+00
bution to global warming bution to ozone layer depletion bution to photochemical oxidation surces use se of freshwater	$kg PO_4^{3-} eq$ $kg CO_2 eq$ $kg CFC11$ eq $kg C_2H_4 eq$ Unit m3	5.75E-02 4.08E+01 7.20E-06 1.56E-02 Total 3.64E-01	5.69E-02 4.01E+01 7.18E-06 1.54E-02 Manufacturing 3.64E-01	4.14E-04 3.93E-01 7.97E-10 1.28E-04 Distribution 0*	3.54E-05 4.78E-02 3.93E-09 1.57E-05 Installation 5.84E-05	0* 0* 0* 0* 0* Use	1. 2. 1. 7. En

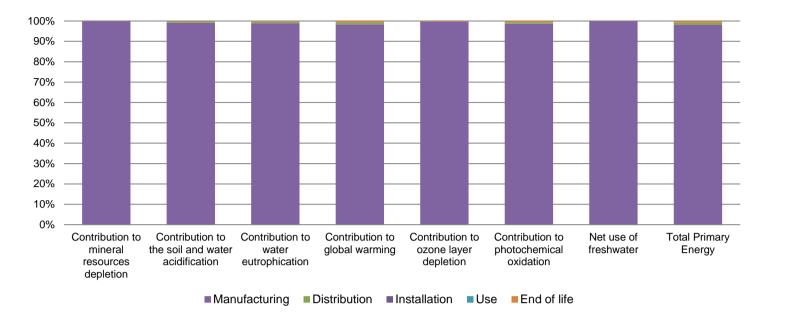

Optional indicators	Heatsink, Panel Mount-SSR series - SSRHP02						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	4.44E+02	4.35E+02	5.53E+00	6.75E-01	0*	3.38E+00
Contribution to air pollution	m³	3.67E+03	3.62E+03	1.67E+01	5.28E+00	0*	2.63E+01
Contribution to water pollution	m³	4.86E+03	4.76E+03	6.47E+01	5.65E+00	0*	2.81E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	0.00E+00	0*	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.59E+01	3.59E+01	7.41E-03	0*	0*	4.14E-03
Total use of non-renewable primary energy resources	MJ	5.21E+02	5.11E+02	5.55E+00	7.39E-01	0*	3.71E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.57E+01	2.57E+01	7.41E-03	0*	0*	4.14E-03
Use of renewable primary energy resources used as raw material	MJ	1.03E+01	1.03E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.21E+02	5.11E+02	5.55E+00	7.39E-01	0*	3.71E+00
Use of non renewable primary energy resources used as raw material	MJ	3.20E-03	3.20E-03	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	9.32E+00	4.99E+00	0*	1.00E+00	0*	3.32E+00
Non hazardous waste disposed	kg	2.39E+02	2.39E+02	0*	0*	0*	0*
Radioactive waste disposed	kg	6.75E-02	6.74E-02	9.95E-06	0*	0*	1.78E-05
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.04E+00	2.59E-01	0*	0*	0*	1.78E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6, database version 2017-03.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Depending on the impact analysis, the environmental indicators of other products in this family may be proportional extrapolated by the mass of the product.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N° ENVPEP1308009_V2 Drafting rules PCR-ed3-EN-2015 04 02

Date of issue 05/2017 Supplemented by PSR-0005-ed2-EN-2016 03 29

Validity period 5 years Information and reference documents www.pep-ecopassport.org

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal X Externa

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP1308009_V2

© 2017 - Schneider Electric - All rights reserved

05/2017