




## DIMENSIONS



## ACCESSOIRES

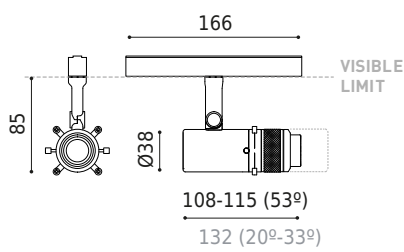

TRACK 48V OPTIONS

## PRODUIT

|           |                                     |
|-----------|-------------------------------------|
| Nom       | COCO SHAPER 48V SHORT 53° 3000K NTW |
| Référence | A5190111NTW-S                       |
| Coleur    | Noir Texturé - Rail Blanc           |
| RAL       | 9005                                |
| Catégorie | TRACK LIGHTS                        |

## SOURCE DE LUMIÈRE

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Type                               | LED                                   |
| Flux lumineux brut                 | 680 lm                                |
| Température de couleur             | 3000 K - Autres K, veuillez consulter |
| Stabilité chromatique              | MacAdam Step 2                        |
| Indice de reproduction chromatique | CRI > 90                              |
| Puissance                          | 6 W                                   |
| Efficacité                         | 108 lm/W                              |
| Durée de vie de la LED             | L80B10 > 60.000h                      |

## LUMINAIRE | DONNÉES PHOTOMÉTRIQUES

|                            |     |
|----------------------------|-----|
| Efficacité lumineuse       | 37% |
| Angle du faisceau lumineux | 53° |

## LUMINAIRE | DONNÉES ÉLECTRIQUES

|                                 |                                          |
|---------------------------------|------------------------------------------|
| Valeurs de puissance du système | 6,92 W                                   |
| Tension                         | 48Vdc                                    |
| Variation d'intensité           | Non Dim - Autres DIM, veuillez consulter |
| Classe d'isolation électrique   | II                                       |

## D'AUTRES DONNÉES

|                           |                         |
|---------------------------|-------------------------|
| Étanchéité                | IP20                    |
| Contrôle sans fil         | Veuillez consulter      |
| Angle d'inclinaison       | 90°                     |
| Angle de rotation         | 360°                    |
| Type de rail              | Track 48V               |
| Poids                     | 260 g                   |
| Poids avec emballage      | 434 g                   |
| Dimensions de l'emballage | 200 x 188 x 144 mm      |
| Unités par emballage      | 1                       |
| Matériaux                 | Aluminium / Verre Optic |



La famille Coco présente le nouveau luminaire Coco Shaper pour parfaire vos mises en lumière. Projecteur de découpe compact et puissant, Coco profile la lumière pour donner des effets graphiques grâce à ses lentilles et couteaux ajustables. Fidèle au langage esthétique de sa collection et de taille minimale pour ses performances, Coco Shaper crée des scénographies uniques en projetant le contour géométrique souhaité : des cercles, des polygones quadrilatères ou triangulaires. Il est disponible en version rail 48V et en version encastrée pour une installation ponctuelle. Son choix d'optiques en version fixe de 53° ou variable de 20° à 33°, permet non seulement d'ajuster la taille, mais aussi la clarté et la précision d'une forme.

DIAGRAMME POLAIRE



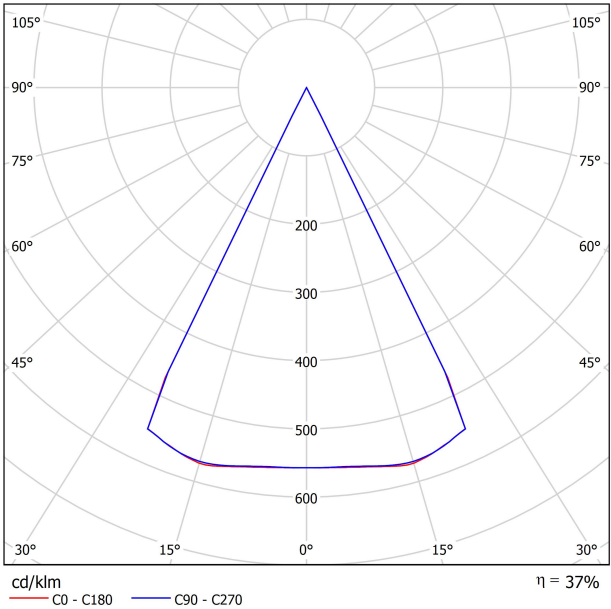


DIAGRAMME CONIQUE

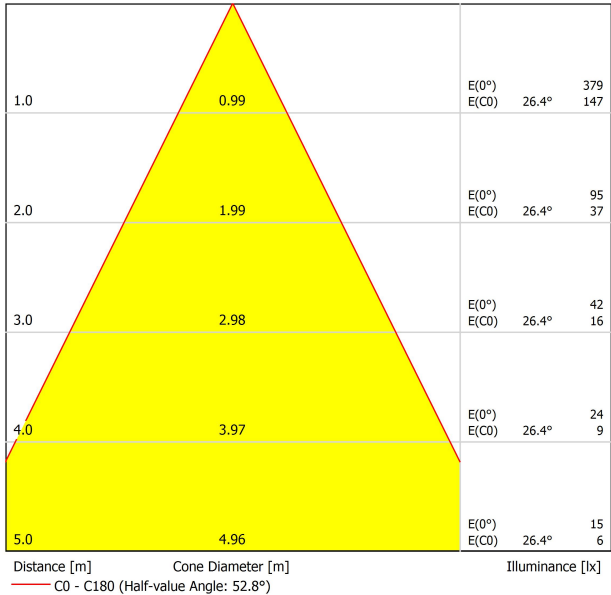




## TRACK 48V TRIMLESS

|                                          |                      |
|------------------------------------------|----------------------|
| TRACK 48V TRIMLESS 1m                    | A338-01-00-   N   WT |
| TRACK 48V TRIMLESS 2m                    | A338-02-00-   N   WT |
| TRACK 48V TRIMLESS 3m                    | A338-03-00-   N   WT |
| TRACK 48V TRIMLESS Corner 90° One Plane  | A338-06-00-   N   WT |
| TRACK 48V TRIMLESS Corner 90° Two Planes | A338-07-00-   N   WT |

PLASTERBOARD CEILING, MANDATORY THICKNESS 12,5mm.  
RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE  
INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING.




TRIMLESS INSTALLATION GUIDE  
<https://youtu.be/tgGsQdaYe-w>



## TRACK 48V SURFACE

|                                        |                       |
|----------------------------------------|-----------------------|
| TRACK 48V SURFACE 1m                   | A338-11-00-   NT   WT |
| TRACK 48V SURFACE 2m                   | A338-12-00-   NT   WT |
| TRACK 48V SURFACE 3m                   | A338-13-00-   NT   WT |
| TRACK 48V SURFACE Corner 90° One Plane | A338-14-00-   NT   WT |
| TRACK 48V SURFACE T-Joint              | A338-15-00-   NT      |
| TRACK 48V SURFACE X-Joint              | A338-16-00-   NT      |



## TRACK 48V SURFACE SHORT


|                                              |                       |
|----------------------------------------------|-----------------------|
| TRACK 48V SURFACE SHORT 1m                   | A338-21-00-   NT   WT |
| TRACK 48V SURFACE SHORT 2m                   | A338-22-00-   NT   WT |
| TRACK 48V SURFACE SHORT 3m                   | A338-23-00-   NT   WT |
| TRACK 48V SURFACE SHORT Corner 90° One Plane | A338-24-00-   NT   WT |
| TRACK 48V SURFACE SHORT T-Joint              | A338-25-00-   NT      |
| TRACK 48V SURFACE SHORT X-Joint              | A338-26-00-   NT      |



COLOUR | N ■ RAL 9005 | NT ■ RAL 9005 | WT □ RAL 9016 |

### TRACK 48V TRIMLESS


#### Corner 90° One Plane




\*Electrical connection not included

### TRACK 48V TRIMLESS

#### Corner 90° Two Planes




\*Electrical connection not included

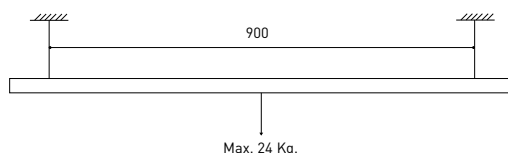


### TRACK 48V SURFACE


#### Corner 90° One Plane



#### T-Joint




#### X-Joint




Electrical connection not included | Straight joiner included

### TRACK 48V SURFACE SHORT


#### Corner 90° One Plane



#### T-Joint



#### X-Joint



Electrical connection not included | Straight joiner included



## CONSTANT VOLTAGE LED POWER SUPPLY

|                            | P    | V   | D (A x B x C)   |
|----------------------------|------|-----|-----------------|
| <b>0434-01-61*</b>   N   W | 100W | 48V | 298 x 19 x 16mm |
| <b>0434-01-69*</b>   N   W | 250W | 48V | 268 x 22 x 44mm |
| <b>0434-01-62</b>          | 150W | 48V | 350 x 30 x 18mm |
| <b>0434-01-80</b>          | 250W | 48V | 400 x 40 x 22mm |

220  
240 V~ | \*To be installed inside the track.


» 282

## DROP VOLTAGE TABLE

| POWER (W) | CABLE SECTION (mm²) | CABLE LENGTH (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
| 100       | 0,75                | 50               | 50 | X  | X  |
|           | 1,5                 | 50               | 50 | 40 | 25 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |
| 250       | 0,75                | 20               | X  | X  | X  |
|           | 1,5                 | 35               | 20 | X  | X  |


### LED POWER SUPPLY

**0434-01-61**




### LED POWER SUPPLY

**0434-01-69 \*\***




### LED POWER SUPPLY

**0434-01-62**




### LED POWER SUPPLY

**0434-01-80**




\*\*Not recommended for Track 48V Surface Short

## ALL 48V TRACK




Live-End Connector 48V

A338-00-01- | N | W |




Central Connector 48V

A338-00-02- | N | W |



L-Joint Connector 48V


A338-00-12- | N | W |



Corner 90° Connector One Plane 48V


A338-00-24- | N | W |

\*Not suitable for trimless version




T-Joint Connector 48V

A450-00-07- | N |



X-Joint Connector 48V

A450-00-08- | N |



Wireless Control 48V

0434-01-31- | N | W | Casambi/AAG Stucchi App



Cover Gap 1m 48V

A338-00-30- | N | W |

## TRIMLESS 48V



Trimless T-Bracket 48V


A338-00-03



Trimless Clamp for M6 ROD 48V

A338-00-09

\*See accessories quantities



Trimless Long T-Bracket 48V


A338-00-04



Trimless Track Clamp 48V

A338-00-10

\*See accessories quantities



Trimless Straight Joiner 48V (2 Units)


A338-00-05- | N | WT |



Trimless Suspension Kit 48V

A338-00-08

\*See accessories quantities



Trimless Plaster Installation Guard 1m 48V

A338-00-21

\* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

## TRIMLESS, SURFACE & SUSPENSION 48V



### End 48V

A338-00-06- | NT | WT |



### End feed 48V

A338-00-07- | NT | WT |

## SURFACE & SUSPENSION SHORT 48V



### Short End 48V


A338-00-18- | NT | WT |



### Short End feed 48V

A338-00-19- | NT | WT |

## SURFACE & SURFACE SHORT 48V



### Power Supply Case 48V


A338-00-29- | NT | WT | 150 W

220 V ~  
240



INCL


To be installed aside 48V Surface Tracks



### Surface Straight Joiner 48V

A338-00-11

## SUSPENSION & SUSPENSION SHORT 48V



### Wired Power Supply Case 48V

A338-00-25- | NT | WT | 150 W NO DIM

A338-00-26- | NT | WT | 150 W DIM

220 V ~  
240




INCL



### Suspension Kit 48V (2 units)

A338-00-15- | NT | WT |



### Suspension Feed Kit 48V

A338-00-16- | N | W | NO DIM

A338-00-17- | N | W | DIM


For remote power supply

A338-00-27- | N | W | NO DIM

A338-00-28- | N | W | DIM

For power supply inside the track

## WIRE TRIMLESS ACCESSORIES



### FEED

#### MAINS THICK TRIMLESS\*

A023-00-01- | W | N | NO DIM

#### MAINS THICK TRIMLESS\*


A023-00-02- | W | N | DIM



REMOTE

INCL

Ø20



### FASTENING

#### STEEL CABLE TRIMLESS\*


A023-00-05- | W | N |




INCL

Ø20

#### MAINS THICK TRIMLESS



#### MAINS THICK TRIMLESS




#### STEEL CABLE TRIMLESS



\* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

## INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES

### INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL

### INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT

### ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI

### ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN




Interrumpir la alimentación del aparato

Cut the power supply to the luminaire

Couper l'alimentation du luminaire

Interrompere l'alimentazione dell'apparecchio

Stromversorgung der Leuchte unterbrechen




Quitar la(s) fuente(s) de luz para el desecho

Remove light source(s) for disposal

Retirer la (les) source(s) lumineuse(s) pour l'élimination

Rimuovere la/le sorgente/e di luce per lo smaltimento

Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho

Remove the battery for decommissioning

Retirer la batterie pour sa mise au rebut

Rimuovere la batteria per la dismissione

Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho

Remove control gear for disposal

Retirer le dispositif de commande pour l'élimination

Rimuovere l'alimentatore per lo smaltimento

Betriebsgerät zur Entsorgung ausbauen

Enviar los materiales a un centro de recogida RAEE

Send the materials to a WEEE collection centre

Envoyer les matériaux dans une déchetterie DEEE

Inviare i materiali ad un centro di raccolta RAEE

Die Materialien in einem WEEE-Zentrum entsorgen

