

LEO VARIOFLEX ADAPT

EN Installation Instructions	HR Uputstvo za montažu	SE Installationsanvisning
DE Montageanleitung	NL Montagehandleiding	RU Инструкция по монтажу
CZ Montážní návod	RO Instrucțiuni de montaj	SRB Instrukcija za instalaciju
DK Monteringsvejledning	IT Istruzioni di montaggio	SK Montážny návod
EE Paigaldusjuhend	LT Montavimo Instrukcijos	SLO Navodilo za montažo
FI Asennusohje	LV Instalācijas instrukcija	CN 安装说明书
FR Notice de montage	NO Monteringsanvisning	
HU Szerelési útmutató	PL Instrukcja montażu	

WARNING:

1. Ensure that any installation and maintenance be performed by a qualified electrician and that luminaire be wired in accordance with the latest IEE electrical regulations or the local equipments.
2. Ensure that the power supply is off before performing installation and maintenance and not switched on until the installation or maintenance is completed.
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Caution: Risk of electric shock


4. If the external flexible cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. Only to be installed outside arms reach.
6. This product contains a light source of energy efficiency class D.
7. Normal industrial luminaire, NOT for extreme usage as Cold Storage, Chemical plants etc.

Product Description	Wattage	SAP Code	L1	L2	W	H	Wind speed (m/s)	Windage at 13°(m²) Scx	Load
LEO VFA IP66 S 10000 830/40	67W	96701916	275	295	55	440	25	0.034	3.44kg
LEO VFA IP66 S 15000 830/40	100W	96701917	275	295	55	440	25	0.042	3.44kg
LEO VFA IP66 M 25000 830/40	167W	96701918	360	380	55	440	25	0.056	4.38kg
LEO VFA IP66 L 40000 830/40	267W	96701919	360	380	55	432	25	0.062	5.18kg
LEO VFA IP66 S 10000 827/40	67W	96701920	275	295	55	440	25	0.034	3.44kg
LEO VFA IP66 S 15000 827/40	100W	96701921	275	295	55	440	25	0.042	3.44kg
LEO VFA IP66 M 25000 827/40	167W	96701922	360	380	55	440	25	0.056	4.38kg
LEO VFA IP66 L 40000 827/40	267W	96701923	360	380	55	432	25	0.062	5.18kg
TECO LEO MOUNT POLE 42/60 GR	—	96701924	—	—	—	—	—	—	1.9kg
TECO LEO MOUNT POLE 76 GR	—	96701925	—	—	—	—	—	—	2.5kg
TECO LEO PLUG&PLAY PHOTOCCELL S MB	—	96701926	—	—	—	—	—	—	0.55kg
TECO LEO PLUG&PLAY PHOTOCCELL M/L MB	—	96701927	—	—	—	—	—	—	0.72kg






1 Info on replaceability:





www.thorn-eco.com

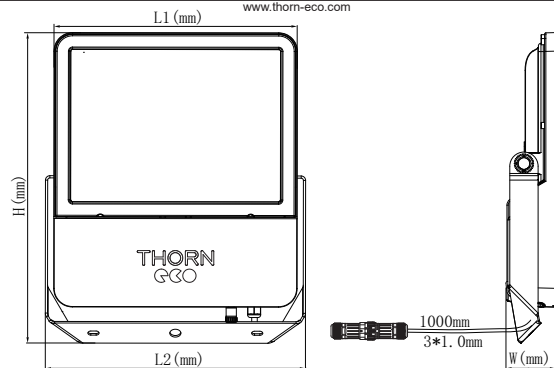

LEO VARIOFLEX ADAPT

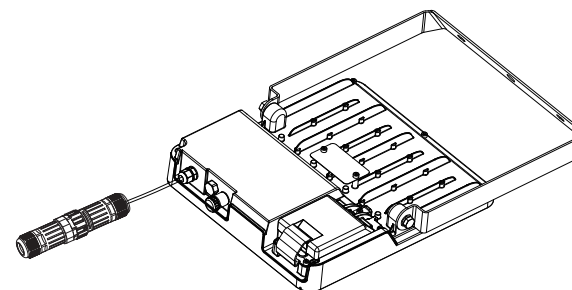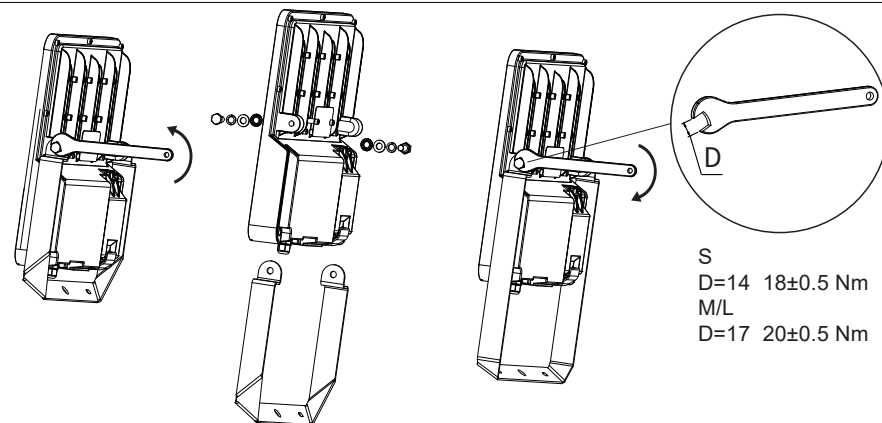

Remove the insert with a small screwdriver
Keep safe for future changes if required
After installing the sensor, the protection level and impact resistance level are reduced to IK04/IP65.



Accessories
Photocell Sensor
Luminaire is only on from Dusk

LEO VARIOFLEX ADAPT

1

(AC Power Input 100-277V AC)

2

	d
TE 10000 lm	185mm
TE 15000 lm	185mm
TE 25000 lm	220mm
TE 40000 lm	220mm

3

Parts A, B, C, D are NOT included.
Teile A, B, C, D sind nicht im Lieferumfang enthalten.
Pièces A,B,C, D non incluses.

A:Screw
M6x60

B:Washer
φ6.4xφ12x1.6

C:Spring washer
φ6.1xφ9.1x3.2

D:Nut
M6

4

5

6

Angle Switching
3531117D | 453140D

CCT Switching
5000K | 4000K

The insulation category of the control conductor and LV power supply is basic insulation.

LEO VARIOFLEX ADAPT

7

IK04
The product is horizontally installed on the wall.


1	2	Luminous Flux				
5000 lm	10000 lm	18000 lm	30000 lm			
7500 lm	12500 lm	22500 lm	35000 lm			
10000 lm	15000 lm	25000 lm	40000 lm			
10000 lm	15000 lm	25000 lm	40000 lm			

LED driver side
LED driver side

(AC IN 100~277V)
LED driver side

	A	B	C	
10000 lm	179	191	6.5	2*M6
15000 lm	179	191	6.5	2*M6
25000 lm	214	226	6.5	2*M6
40000 lm	214	226	6.5	2*M6

LEO VARIOFLEX ADAPT



ENGLISH

- The fitting should not be exposed to harsh chemicals. (e.g. Acids, fertilisers or lime).
- Never allow visible parts of the luminaire to be covered.
- Luminaire must not be cleaned with high pressure washers.
- The fittings is not suitable for use in high chlorine environments such as spas and swimming pools.
- Do not expose the luminaire to petroleum.
- Operational ambient temperature range -30°C to 40°C.
- Do not use if the luminaire, connectors or cabling are damaged.
- Minimum distance to sea 5 km.

DEUTSCH

- Das Produkt darf keinen aggressiven Chemikalien ausgesetzt werden (z.B. Säuren, Düngemittel oder Kalk).
- Sichtbare Teile der Leuchten dürfen nicht bedeckt werden.
- Die Leuchte darf nicht mit Hochdruckreinigern gereinigt werden.
- Die Leuchte ist nicht für den Einsatz in chlorhaltigen Umgebungen wie Spas und Schwimmbädern geeignet.
- Die Leuchte darf nicht in Kontakt mit Ölen kommen.
- Betriebstemperaturbereich von -30°C bis 40°C
- Bei Beschädigung der Leuchte, Steckverbinder oder Kabel darf die Leuchte nicht weiter betrieben werden.
- Mindestabstand zum Meer 5 km.

FRANCAIS

- Les luminaire ne doivent pas être exposés à des produits chimiques agressifs (par exemple, des acides, des engrais ou de la chaux).
- Ne jamais recouvrir le luminaire.
- Le luminaire ne doit pas être nettoyé avec un jet haute pression.
- Les produits ne conviennent pas aux environnements à forte teneur en chlore tels que les spas et les piscines.
- N'exposez pas le luminaire à l'essence.
- Température ambiante d'utilisation -30°C à 40°C
- Ne pas utiliser si le luminaire, les connecteurs ou le câblage sont endommagés.
- Distance minimale à la mer 5 km.

ITALIANO

- Il raccordo non deve essere esposto a sostanze chimiche aggressive. (ad es. acidi, fertilizzanti o calce).
- Non lasciare mai che parti visibili dell'apparecchio siano coperte.
- L'apparecchio non deve essere pulito con l'idropulitrice.
- L'apparecchio non è adatto per l'uso in presenza di cloro alto p.es. ambienti spa e piscine.
- Non esporre l'apparecchio al petrolio.
- Intervallo di temperatura ambiente operativo da -30°C a 40°C.
- Non utilizzare se l'apparecchio, i connettori o il cablaggio sono danneggiati.
- Distanza minima dal mare 5 km.

Suggested installation height: 8m.

