
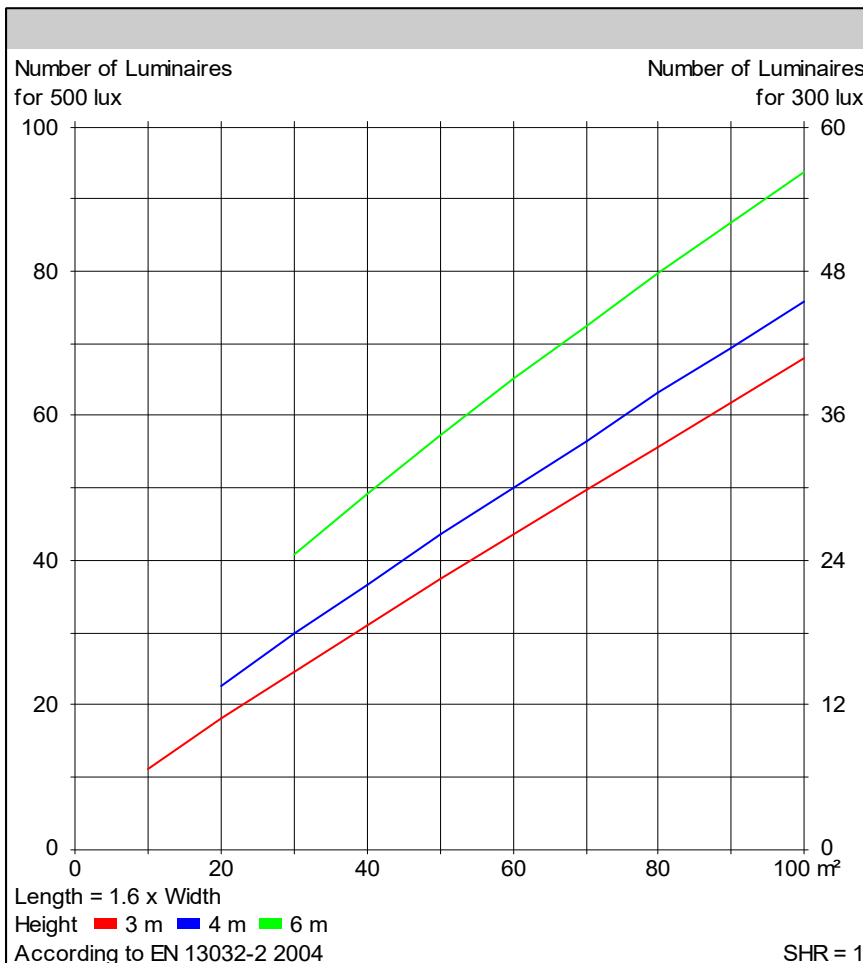


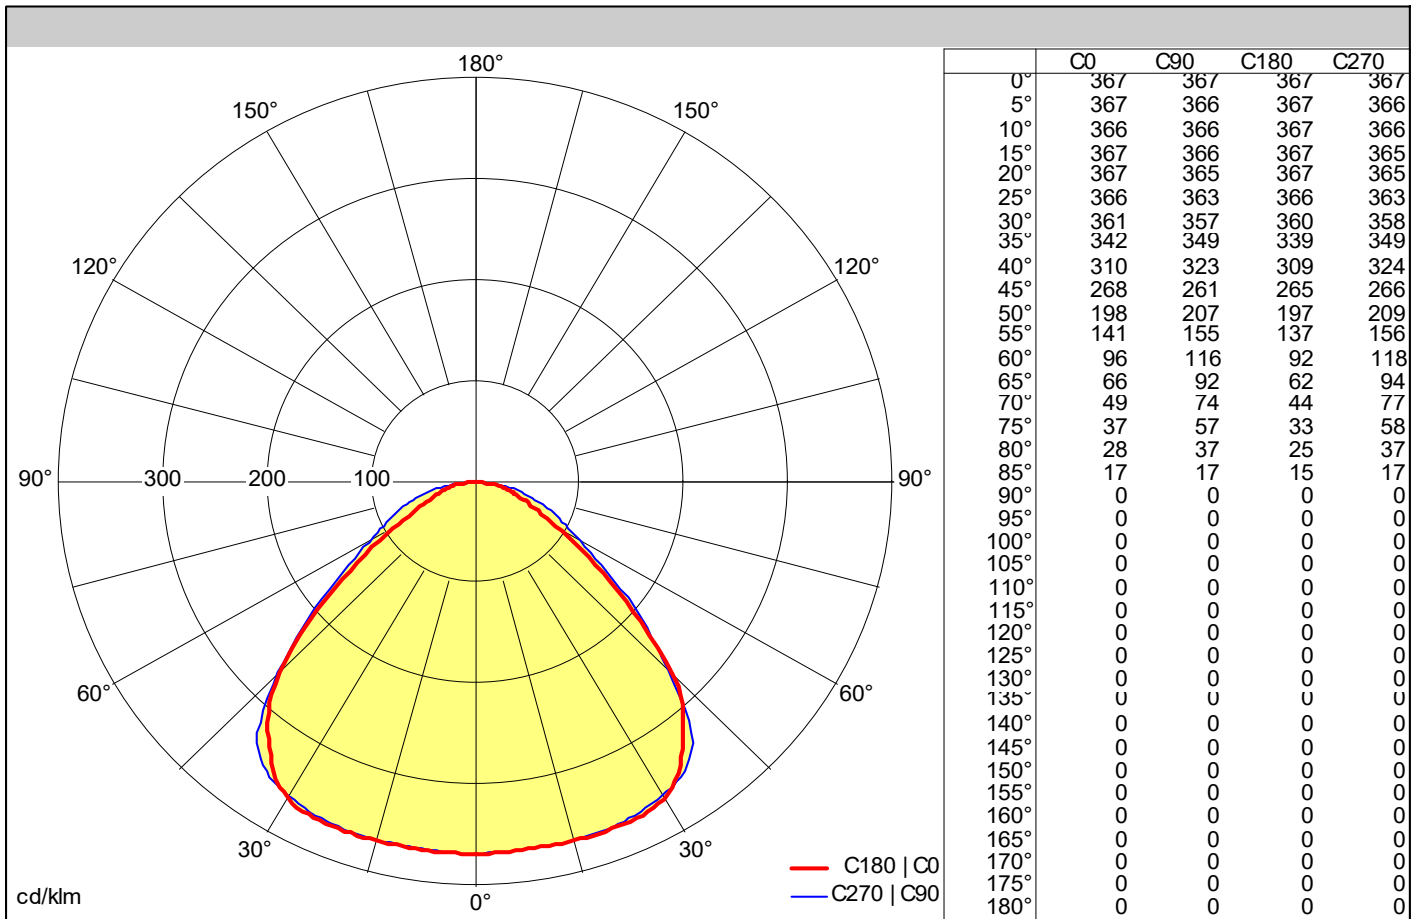

Light output ratio

LOR	100 %
ULOR	0 %
DLOR	100 %
FFR	0.00 (0:100)
BLF	1.00

Glare Evaluation

X = 4 H, Y = 8 H	S = 0.25 H
Reflection factors	70/50/20
UGR transversal	<28
UGR axial	<28

Classification

LITG	A40
EN	
BZ	
UTE	1.00 D
CIE Flux Codes	55 86 96 100 100