

22260891	DATA SHEET	
Valid from: 29.01.2024	AB-C4-(L*)PUR-M12FA-2L	

Product description

- Sensor/actuator cable, 4-pol, PUR halogen-free, black
- Angled M12-jack on free conductor end
- 2 LEDs



General characteristics

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260891	AB-C4-15,0PUR-M12FA-2L	15	angled

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	24 V DC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing	NBR

Line

Cable construction	4 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,27 mm ± 0,02 mm
Cable outer diameter D	4,7 mm ± 0,15mm
Insulation color	brown, white, blue, black

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260891EN Version: 00	Page 1 of 3
---	---------------------------------------	-------------

22260891	DATA SHEET	
Valid from: 29.01.2024	AB-C4-(L*)PUR-M12FA-2L	


Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Minimum bending radius, fixed installation	5 x D
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s ²
Cable weight	30 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 1 GΩ*km
Conductor resistance	≤ 58 Ω/km
Flame resistance	acc. to UL 758/1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815 DIN EN 50267-2-1
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A low adhesion abrasion resistant

Standards/Approvals

Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137


Technical drawing

Dimensional drawing

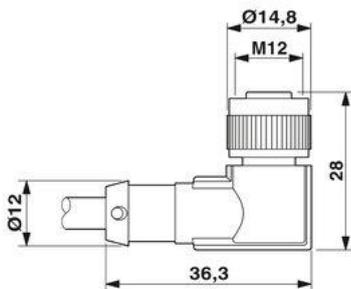


Jack M12 x 1, angled, with LEDs

Drawing

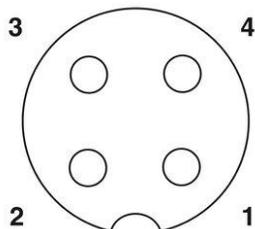


Pin assignment M12-jack, 4-pol, A-coding

Circuit diagram

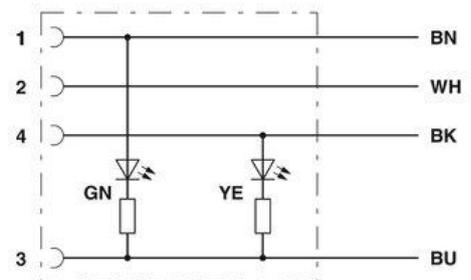

Pin assignment M12-jack

Wire cross section

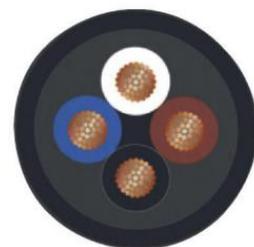

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260891EN Version: 00	Page 2 of 3
---	---------------------------------------	-------------

22260891	DATA SHEET	
Valid from: 29.01.2024	AB-C4-(L*)PUR-M12FA-2L	

Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260891EN Version: 00	Page 3 of 3
---	---------------------------------------	-------------