

22262105

DATA SHEETValid from:
28.11.2023**AB-C4-M8MS-(L*)PVC****LAPP****Product description**

- Sensor/actuator cable, 4-pol, PVC black
- Straight M8-plug on free conductor end

**General characteristics**

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -25 °C to +80 °C (-13°F to 176°F) (cable, fixed installation) -10 °C to +80 °C (14°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,2 Nm (M8-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22262105	AB-C4-M8MS-2,0PVC	2	straight
22262106	AB-C4-M8MS-5,0PVC	5	straight
22262107	AB-C4-M8MS-10,0PVC	10	straight

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	60 V DC / 48 V AC
Rated current	4 A
Oversupply category	II
Pollution degree	3

Mechanical properties**Jack**

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing, material	NBR

Line

Cable construction	4 x AWG24/32
Signal line, construction	32 x 0,1 mm
Conductor cross-section	0,25 mm ²
Conductor diameter including isolation	1,17 mm ± 0,02 mm







Cable outer diameter D	4,7 mm \pm 0,02mm
Insulation color	brown, white, blue, black
Sheath color	black, RAL 9005
Cable weight	33 kg/km
Outer coating, material	PVC
Wire insulation, material	PVC
Insulation resistance	$\geq 100 \text{ M}\Omega \cdot \text{km}$ (at 20 °C)
Conductor resistance	max. 79 Ω/km (at 20 °C)
Flame resistance	acc. to UL-Style 2464
Oil resistance	acc. to DIN EN 60811-2-1

Standards/Approvals

Product standard, M8 connector

IEC 61076-2-104

Technical drawing

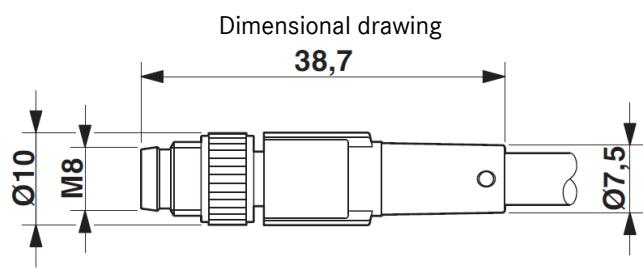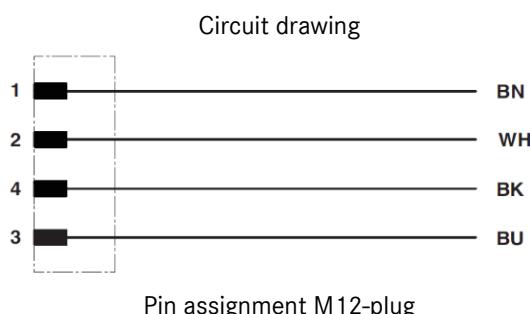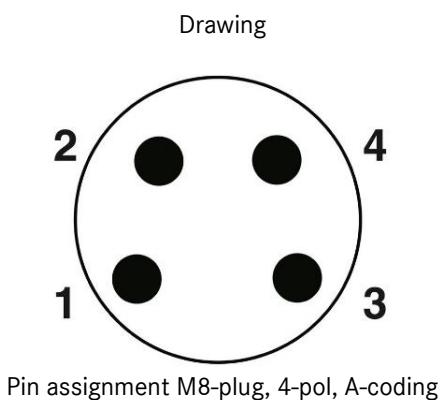

Application range

For medium mechanical load in dry areas

Note

Photographs are not true to scale and do not represent detailed images of the respective products.