



= "0"
7 "0"

Buzzer Horn LED Array
IP Rating: IP65
Temp: -25 °C to +50 °C
Unit weight: 184g
CE

Order code Voltage
H100BL030G/x 12-30V DC
• 12V dc 10mA
• 24V dc 24mA

• Beacon Current Consumption
• 12V dc 74mA
• 24V dc 80mA


H100BL230G/x 40-260V AC/DC
• 115V ac 50/60Hz 19mA
• 230V ac 50/60Hz 10mA

• Beacon Current Consumption
• 115V ac 50/60Hz 119mA
• 230V ac 50/60Hz 32mA

Dimensions : 94.2 x 135.2mm
1.5mm² terminals
Cable entry: 1 x 5-7mm push
through grommet

x = Lens colour
R = Red
A = Amber
B = Blue
G = Green
Y = Yellow

D

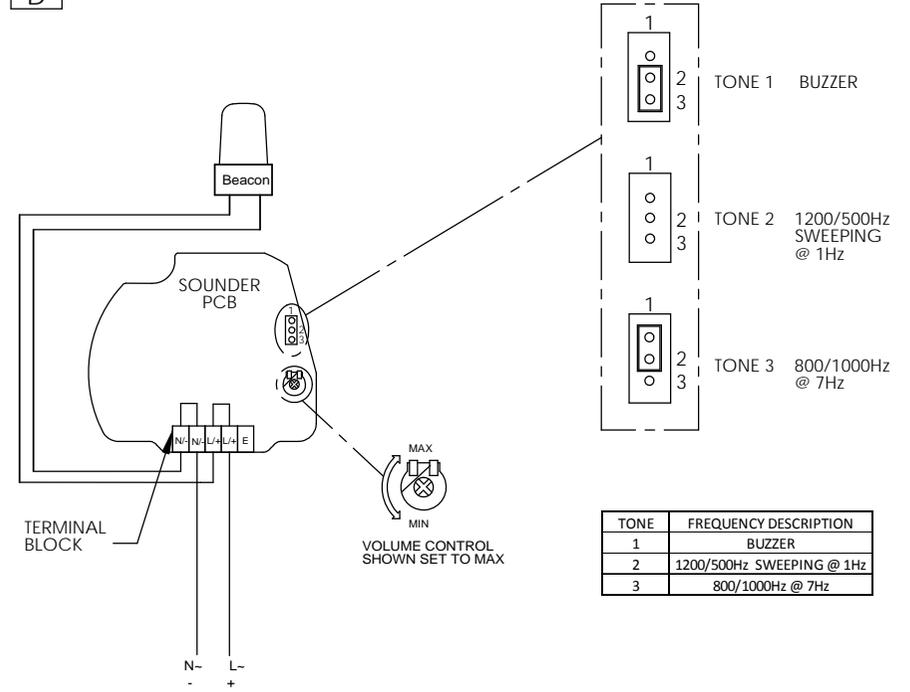


B

- ⚠ ATTENTION:** Installation must be carried out by an electrician in compliance with the latest codes and regulations.
- ⚠ ATTENTION:** Disconnect from power source before installation or service to prevent electric shock.
- ⚠ ATTENTION:** On strobe beacons allow a minimum of 2 minutes for hazardous high voltage to discharge from unit.
- ⚠ ATTENTION:** Lens on unit will be hot allow to cool prior to removal.


C

A


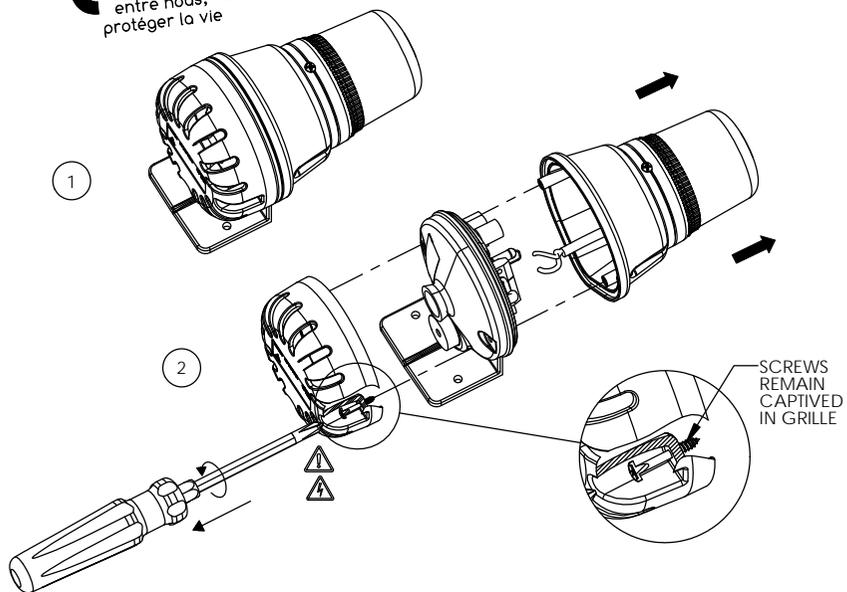


C

TERMINAL BLOCK	A/C INPUT	D/C INPUT
N/-	N-	-
N/+	N- (FROM BEACON)	-(FROM BEACON)
L/+	L-	+
L/+	L- (FROM BEACON)	+(FROM BEACON)
E		

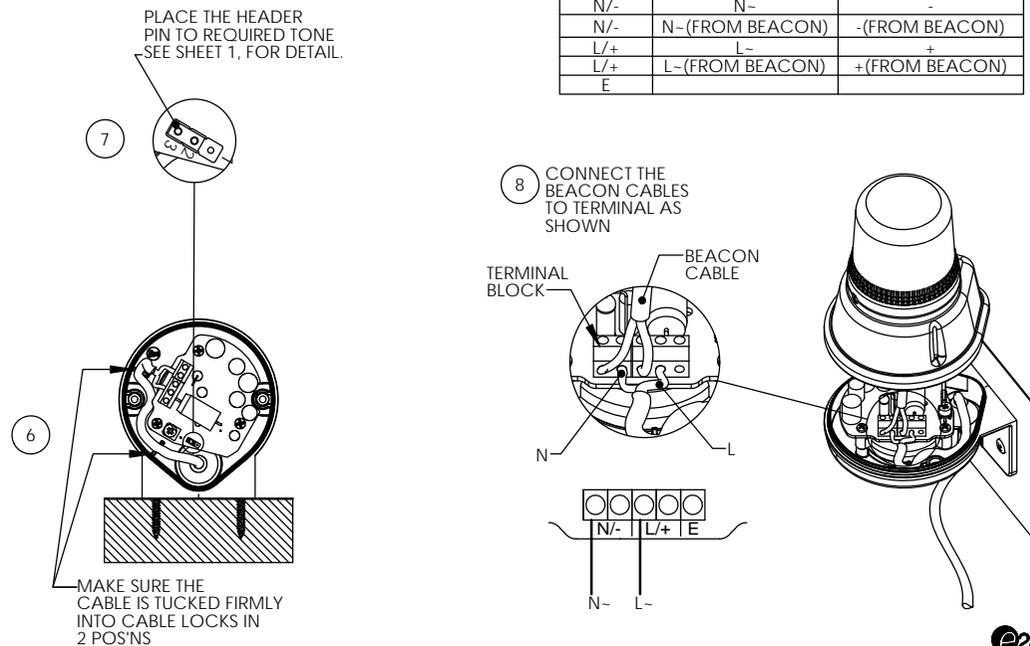

B

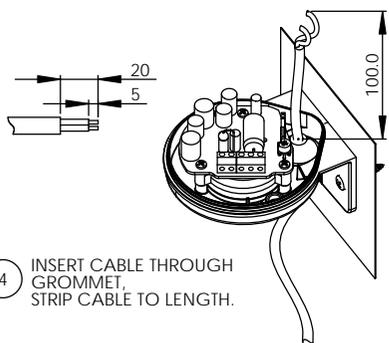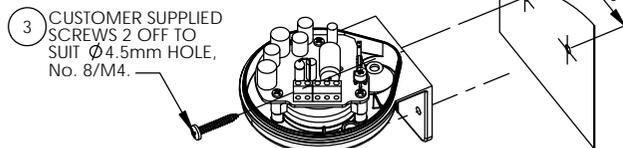

4 INSERT CABLE THROUGH GROMMET. STRIP CABLE TO LENGTH.

Dimensions in mm

D

