



Clifford & Snell®

**INSTALLATION &
TECHNICAL INFORMATION**

PLEASE READ PRIOR TO INSTALLATION



**Clifford and Snell Intrinsically Safe Combination Signal
YL50 Sounder Beacon Range**

VISUAL AND/OR AUDIBLE SIGNALLING DEVICES

APPROVALS AND CONFORMITIES




252163, Issue 2, 23/06/2023

1.0 Introduction

The Clifford & Snell Intrinsically Safe combination Sounder-Beacon range of products YL5IS (Yodalight) are ATEX certified. This range is approved to be installed in Group II (above ground) applications in Zones 0, 1, & 2 with gas groups IIA, IIB, IIC, and Zones 20, 21 & 22 for dust groups IIIC and carries a temperature classification of T4. The Sounder-Beacon range has a total of 32 alarm tones selectable via a DIP switch which is set upon installation. The beacons units are supplied operate with a 1Hz flash signal.

2.0 Intrinsically Safe Labelling

Each product will be given its own individual serial number, which is generated upon receipt of order. This will be printed onto the product label and attached to the side of each product. A label example is shown below:

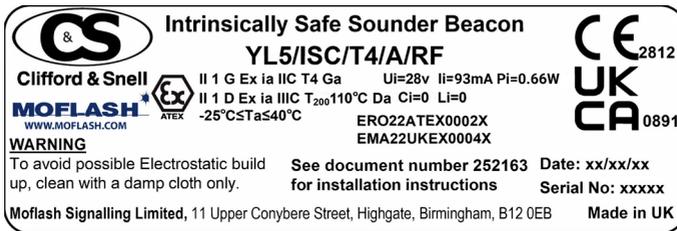

These products have been tested by notified body **Element Materials Technology**, who are UKAS accredited to BS EN ISO/IEC 17025:2005 and ISO/IEC 17065:2012. It is also a Notified Body for the ATEX Directive, UKEX/UKCA, an IECEx Certification Body and an IECEx Testing Laboratory.

The suffix X at the end of the certificate numbers indicate that there are special clauses added for safe use of these units.

3.0 Types of Approval and Standards Applied

The C&S YL5IS product has been approved to and/or conforms to the following standards:

IEC 60079-0:2017
EN IEC 60079-0:2018
IEC 60079-11:2011
EN 60079-11:2012

4.0 Zones, Groups and Temperature Classifications

The Clifford & Snell YL5IS is certified to the following:

YL5/IS*/*/T4

⊕ II 1 G Ex ia IIC T4 Ga,

⊕ II 1 D Ex ia IIIC T₂₀₀ 110°C Da.

This means that the units can be installed in locations with the following conditions when connected to an approved system:

Zones

Zone 0 Explosive gas air mixture continuously present.

Zone 1 Explosive gas air mixture likely to occur in normal operation.

Zone 2 Explosive gas air mixture not likely to occur, and if it does, it will only exist for a short time.

Zone 20 Explosive dust air mixture is continuously present.

Zone 21 Explosive dust air mixture likely to occur in normal operation.

Zone 22 Explosive dust air mixture not likely to occur, and if it does, it will only exist for a short time.

Gas Groupings

IIA Propane Group, IIB Ethylene Group and IIC Hydrogen and Acetylene

Dust

IIIA Fibres and Flying, IIIB Flour and Grain, IIIC Coal Dust and Metal Dust.

Ambient Conditions

Operating Temperature Range: $-25^{\circ}\text{C} < T_a < 40^{\circ}\text{C}$

Storage Temperature Range: $-40^{\circ}\text{C} < T_a < 70^{\circ}\text{C}$

Max. Relative Humidity: 95% @ 40°C

The maximum surface temperature of an operating product will not exceed 110°C.

A Declaration of Conformity and the ATEX Certificates are available upon request or alternately visit www.moflash.co.uk.

5.0 Installation

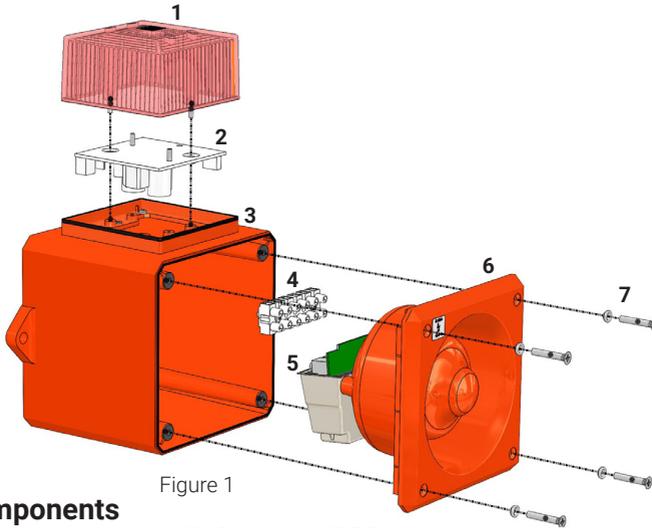


Figure 1

Key Components

- | | |
|-------------------|------------------------|
| 1. Lens | 5. Sounder PCB |
| 2. Beacon PCB | 6. Sounder Front Cover |
| 3. Back Box | 7. Retaining Screws |
| 4. Terminal Block | |

General Requirement

The Sounder must be installed in accordance with the latest EN60079-0 or equivalent IEC specification. A suitably rated Galvanic Isolator or Zener Barrier must also be used, with consideration for any local installation requirements. Installation should only be carried out by appropriately competent and qualified personnel.

- The location of the Sounder should be chosen with due regard to the area over which the signalling device must be audible.
- These units are suitable for wall or ceiling mounting.
- Environmental exposure conditions during installation should be dry. Moist or wet conditions should be avoided.
- Avoid mounting the product where it may be subjected to excessive vibration.

Mounting

Devices should be mounted using the two lugs projecting from the case. The lugs are bored 8mm on 153mm centres. The minimum length of fixing screw required is 25mm. To maintain the IP rating of the enclosure, any cable entries must be fitted with a suitably rated cable gland (not included). Max cable termination 2.5mm². Dimensional drawing can be seen on page 5.

DIMENSIONAL DRAWING

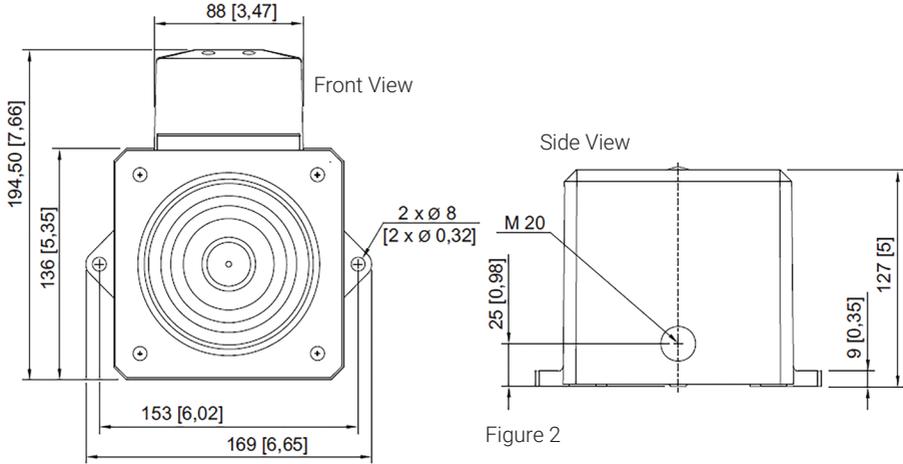


Figure 2

6.0 Wiring

Single Stage Alarm

- Connect the leads according to the circuit diagram (Figure 3)
- Supply the active device with power.

The unit contains 2 printed circuit boards (one for the sounder & one for the beacon). The PCBs can be wired independently or can be connected together by looping in and out of the Terminal Block.

Independent wiring

A dual-channel safety barrier or double intrinsically safe connection is required.

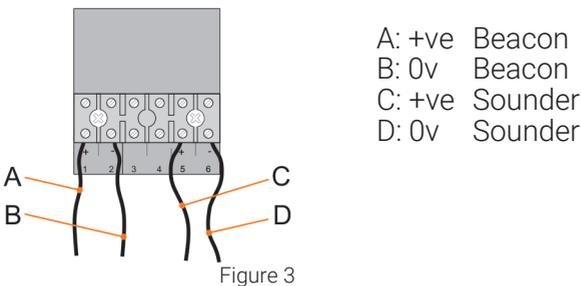


Figure 3

WARNING:

Explosion hazard due to selecting the wrong cables! Non-compliance could result in severe or fatal injuries.

If using separate safety barriers for the sounder and beacon, observe the cable specifications stated on the selected Zener barrier or the isolator certificate.

Loop in/Loop out wiring

A single-channel safety barrier or single intrinsically safe connection is required. Wires C & D are not included on delivery.




Figure 4

Two Stage Alarm

The C&S YL5/S has options for first and second sounder stages.

Stage 1 tones

Selected by using the DIP switch on the Sounder PCB (Figure 8). Tone descriptions can be found in the Tone Table on Page 12.

Stage 2 tones

Each first stage tone has a pre-programmed second stage which is listed in the Tone Table. Users are able to switch between the first and second stage tones by wiring the unit in one of 2 ways.

Second Stage Activation

3rd wire option

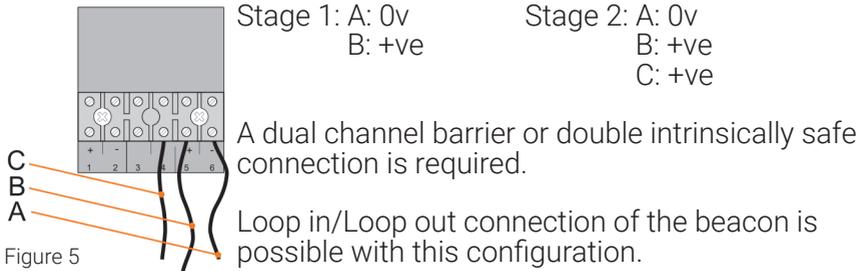


Figure 5

2 wire option (reverse polarity)

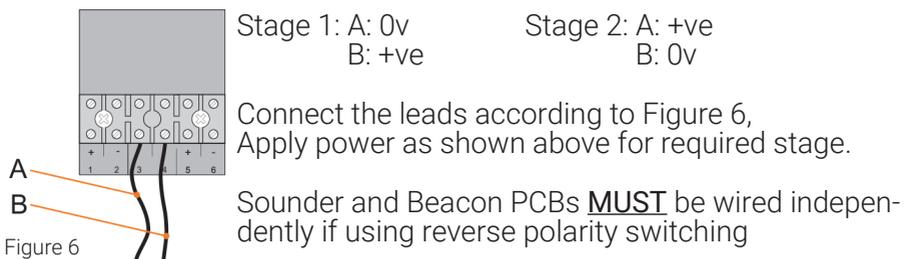



Figure 6

Line Monitoring

If Line Monitoring is required, this can be achieved by using an end-of-line resistor. For this purpose, a wire-wound or metal film resistor with a resistance value of at least 750 Ohm and rated power of at least 2 W or a 4700 Ohm and a rated power of at least 0.4 W.


The line monitoring facility allows the integrity of the line to the sounder to be monitored through the barrier. Two sounders of the same type can be connected in parallel. The resistor can be fitted as per the diagram below (Figure 7).

Line monitoring is optional, and it is the responsibility of the system designer to decide if it is required.

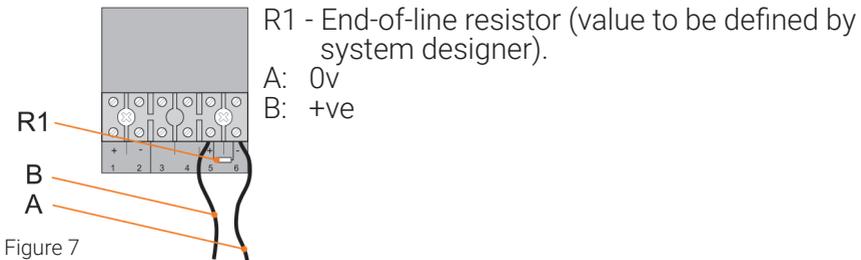


Tone Selection & Volume Control

The C&S YL5/S unit has a total of 32 alarm tones that can be selected upon installation. This is done via the DIP switch shown below. The Tone Table is shown on page 12 of this document.

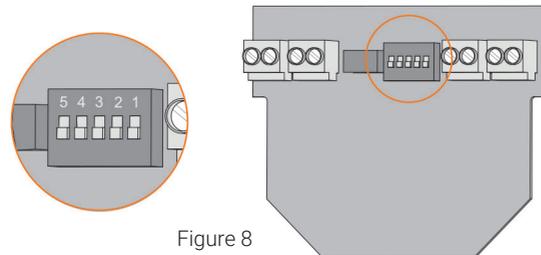

Arrange the settings of the DIP switch using a suitable tool.

- DIP switch “up” corresponds to “1”
- DIP switch “down” corresponds to “0”

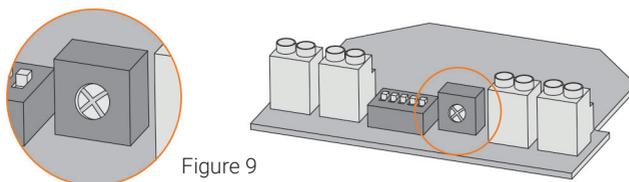

Volume of the product can be reduced by adjusting the POT on the sounder PCB anticlockwise. (Max reduction 15dB).

Barrier/Isolator Information

Connection into the unit must be via a suitably rated Zener Barrier or Galvanic Isolator.

If these units are powered directly without a Barrier/Isolator, the PCBs will be permanently damaged and warranty will be void.

Example of single channel barrier connection

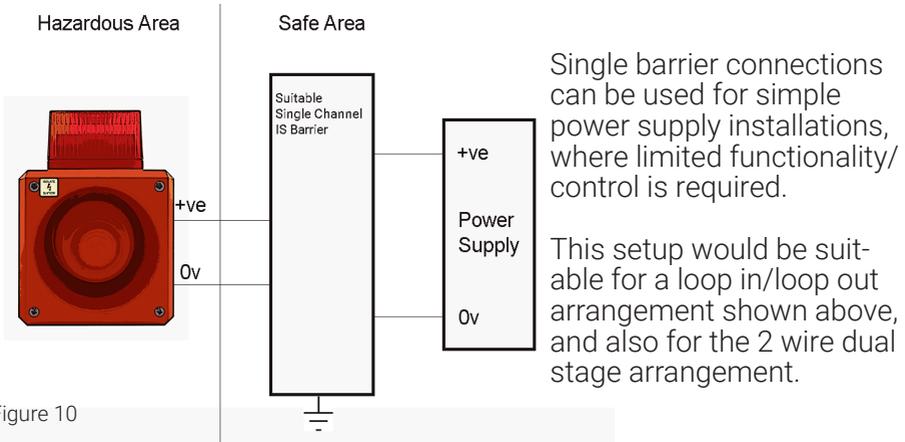


Figure 10

Example of dual channel barrier connection

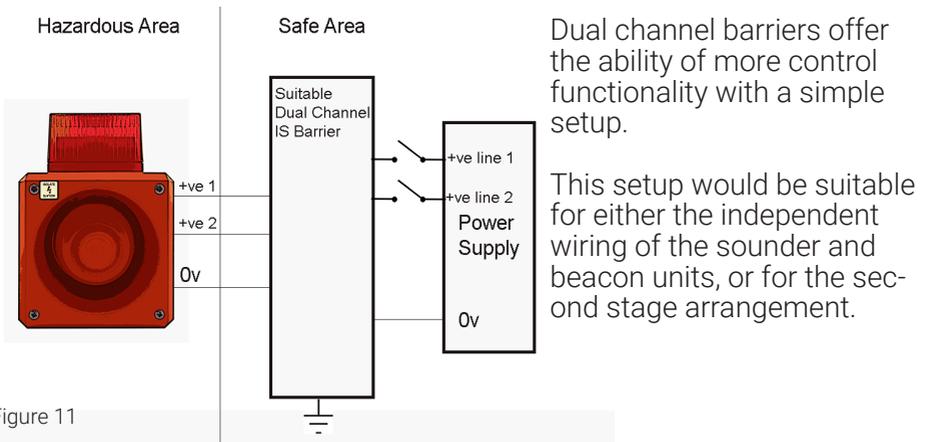


Figure 11

Galvanic Isolators

The Galvanic Isolators have the advantage of not requiring an isolated high integrity earth to be installed, which is required for Zener Barriers. These Isolators are often more expensive per unit but may reduce installation costs as the earth is not required.

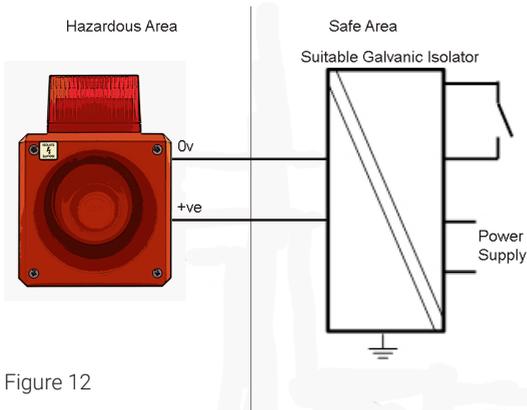


Figure 12

Single isolator connections can be used for simple power supply installations, where limited functionality/control is required.

This setup would be suitable for a loop in/loop out arrangement shown above, and also for the 2 wire dual stage arrangement.

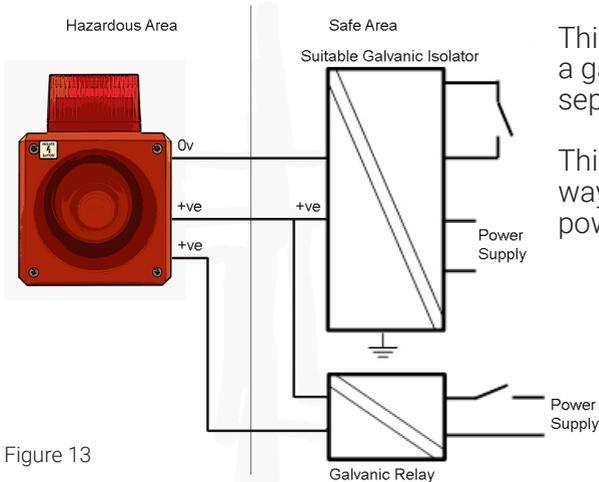


Figure 13

This is an example of using a galvanic isolator with a separate galvanic relay.

This is another acceptable way for the product to be powered.

As with the Zener barriers, the Sounder and the Beacon can be triggered independently when using Galvanic Isolators, however an additional Intrinsically Safe relay is required to make the additional connection.

As with all equipment in the system, the correct ratings must be maintained to keep the integrity and safety to the correct levels. The relay can be switched to change between Sounder or Beacon or Both.

7.0 Maintenance

Little or no maintenance is required during the normal working life of the product. The C&S YL5 Intrinsically Safe enclosures are resistant to most acids, alkalis and chemicals and have been designed to withstand severe weather conditions. However it is suggested that continuous supervision and periodic inspections may be required in relation to the requirements of the installation as per IEC 60079-17.

To avoid the possibility of a potential electrostatic charge build up, it is recommended that the exterior of the product is periodically wiped down with a clean damp cloth. At this point, a visual inspection is recommended to ensure that the product is in good working order and no damage has been sustained during its normal operation.

The enclosure is non-conducting and may generate an ignition-capable level of electrostatic charge under certain extreme conditions. It is the responsibility of the user to ensure that the equipment is installed in a location where it will not be subjected to external conditions that might cause a build-up of electrostatic charge on the surface of the unit.

8.0 Conditions for Use

The C&S Intrinsically Safe Signalling Range uses an enclosure rated at IP66 with suitably rated cable gland fitted (not supplied). To ensure that this rating is maintained once installed, a suitable cable gland must be used which matches this level of protection. The base of the unit contains one M20 aperture for cabling purposes.

Specific Conditions of Use:

1. Clean equipment regularly to prevent dust build-up with a damp or anti-static cloth only.
2. Equipment only suitable for fixed installation.
3. It must be ensured that the equipment is installed in accordance with IEC 60079-14 and IEC 60079-25 and that capacitance and inductance limits are not exceeded by distributed capacitance (Cc) or distributed inductance (Lc) due to cable length.

9.0 Technical Data

- Operating voltage: 16.2 - 26.4vDC
- Current Consumption:

Supply	Certified Barrier / Isolator Parameters	Current Consumption (Tone 1)	Sound Output (dB(A) @ 1m)
24vDC	28v/300Ω	24mA	100
18vDC	28v/300Ω	33mA	97

- Entity Parameters:

	Beacon	Sounder	Combined
U_i	28v	28v	28v
I_i	93mA	93mA	93mA
P_i	0.66W	0.66W	0.66W
C_i	0	0	0
L_i	0	0	0

- Line Monitoring: Yes

Acoustic Data

- Volume: Max. 105dB(A) @ 1m
- Volume Control: 15 dB(A) adjustment (T4 Models only)
- Sound Stages: 2
- Sound Selection: via DIP Switch

Luminous Characteristics

- Light Source: 8 LED Array
- Flash Rate: 60 FPM (1Hz)
- Lens Colour: Amber, Red, Green, Opal, Blue, Clear

Mechanical Data

- Cable Entries: 1x M20

Material

- Enclosure: ABS UL94 5VB, Flame Retardant
- Lens: Polycarbonate, UV Stable UL94 HB, FR
- Assembly Parts: Stainless Steel
- IP Rating: Up to IP66 to IEC 60529 (with suitably rated cable gland, not supplied)

9.0 Tone Table

First Stage Tone	Tone Description	Frequency (Hz)	Repetition Rate	Second Stage Tone	Tone Selection DIP Switch					dB(A) @ 1m (±3dB)	Current Draw (mA)
					1	2	3	4	5		
1	Alternating	800-1000	0.5	3						101	26
2	Alternating	2500-3100	0.5	4	0					99	38
3	Alternating (fast)	800-1000	0.25	7		0				100	26
4	Alternating (fast)	2500-3100	0.25	8	0	0				99	38
5	Alternating	440-554	0.4/0.1	14			0			98	24
6	Alternating	430-470	1.0	14	0		0			97	24
7	Alternating (v.fast)	800-1000	0.13	12		0	0			100	26
8	Alternating (v.fast)	2500-3200	0.07	13	0	0	0			99	38
9	Alternating	440-554	2.0	10				0		99	24
10	Continuous Tone	700	-	1	0			0		98	25
11	Continuous Tone	1000	-	31		0		0		101	26
12	Continuous Tone	1000	-	7	0	0		0		101	26
13	Continuous Tone	2300	-	2			0	0		105	34
14	Continuous Tone	440	-	9	0		0	0		97	24
15	Interrupted Tone	1000	2.0	31		0	0	0		100	26
16	Interrupted Tone	420	1.25	30	0	0	0	0		96	24
17	Interrupted Tone	1000	0.5	1					0	96	26
18	Interrupted Tone	2500	0.25	4	0				0	98	37
19	Interrupted Tone	2500	0.5	2		0			0	95	36
20	Interrupted Tone	700	6/12	10	0	0			0	97	25
21	Interrupted Tone	1000	1.0	32			0		0	100	26
22	Interrupted Tone	700	4.0	10	0		0		0	96	25
23	Interrupted Tone	700	0.25	10		0	0		0	95	24
24	Interrupted Tone	720	0.7/0.3	10	0	0	0		0	97	24
25	Int, fast, rising volume	1400	0.25	26				0	0	97	31
26	Fast siren	250-1200	0.085	11	0			0	0	99	25
27	Rising constant fall	1000	10/40/10	17		0		0	0	100	26
28	ISO 8201 Evacuation	800-1000	As	11	0	0		0	0	100	26
29	Fast Whoop	500-1000	0.15	32			0	0	0	98	25
30	Slow Whoop	500-1200	4.5	12	0		0	0	0	101	26
31	Reverse sweep	1200-500	1.0	11		0	0	0	0	97	25
32	Siren	500-1200	3.0	26	0	0	0	0	0	98	25

Moflash Signalling Limited accepts no liability for any consequences following use of this document. Any technical specifications and products referred to within this document are subject to change without notice due to continual improvement and product development policies any changes will be with consent of relevant notified body. All dB(A) figures are subject to environmental conditions. The units are sold under Moflash standard conditions of sale, available on request.

Moflash Signalling Limited, 11 Upper Conybere Street, Highgate, Birmingham, UK