


Caractéristiques techniques / Características técnicas / Características técnicas / Caratteristiche tecniche												
Modèle-Référence / Modelo-Referencia / Modello-Riferimento / Modelo-Referência	BL12146501/BL12146502/BL12146503/BL12146504 BL12206501/BL12206502/BL12206503/BL12206505 BL12306501/BL12306502/BL12306503/BL12306504											
Tension nominale / Tensión nominal / Tensione nominale / Tensão nominal	230V~50Hz											
Puissance nominale / Potencia nominal / Potenza nominale / Potência nominal	14W			20W			30W					
Type-Longueur de câble / Tipo-Longitud del cable / Tipo-Longhezza del cavo / Tipo-Comprimento do cabo	Connexion rapide dans le produit / fast connectors inside the product											
Indice de protection / Grado de protección / Indice di protezione / Grau de protecção	IP 65											
Dimensions / Dimensiones / Dimensioni / Dimensões	300*300*93,5			300*300*93,5			360*360*93,5					
Lampes LED / Lámparas LED / Lampade LED / Lâmpadas LED	LED											
Nombre de LEDs / Número de LEDs / Numero di LEDs / Número de LEDs	-											
Flux lumineux nominal / Flujo luminoso nominal / Flusso luminoso nominale / Fluxo luminoso nominal	1675	1600	1690	1610	2440	2230	2460	2275	3630	3430	3680	3490
Durée de vie nominale / Vida útil nominal / Durata di vita nominale / Tempo de vida nominal	≥ 50000 h (L70 @ 25°C) *											
Détecteur / Sensor	NO	NO	YES	YES	NO	NO	YES	YES	NO	NO	YES	YES
Température de couleur / Temperatura de color / Temperatura di colore / Temperatura de cor	4000	3000	4000	3000	4000	3000	4000	3000	4000	3000	4000	3000
Indice de rendu des couleurs / Índice de rendimento de color / Índice di resa del colore / Índice de restituição das cores	≥ 83 Ra											
Angle de faisceau nominal / Ángulo del haz luminoso nominal / Ângulo del fascio nominal / Ângulo nominal do feixe	110°											
Facteur de puissance / Factor de potencia / Fattore di potenza / Fator de potência	> 0.9											

! L'installation doit être réalisée par un professionnel qualifié
Veuillez couper l'alimentation générale afin d'éviter les risques d'électrocutions
Veuillez vous assurer de la bonne tension du réseau
Ne pas être à moins de 0.3m de tout objet inflammable ou sensible à la chaleur

! installation and maintenance must be performed by qualified person
Please make sure to turn the power off before installation
Please make sure the lamp is working with the correct input voltage
The minimum distance from lighted objects to luminaires shall be kept at least 0.3m

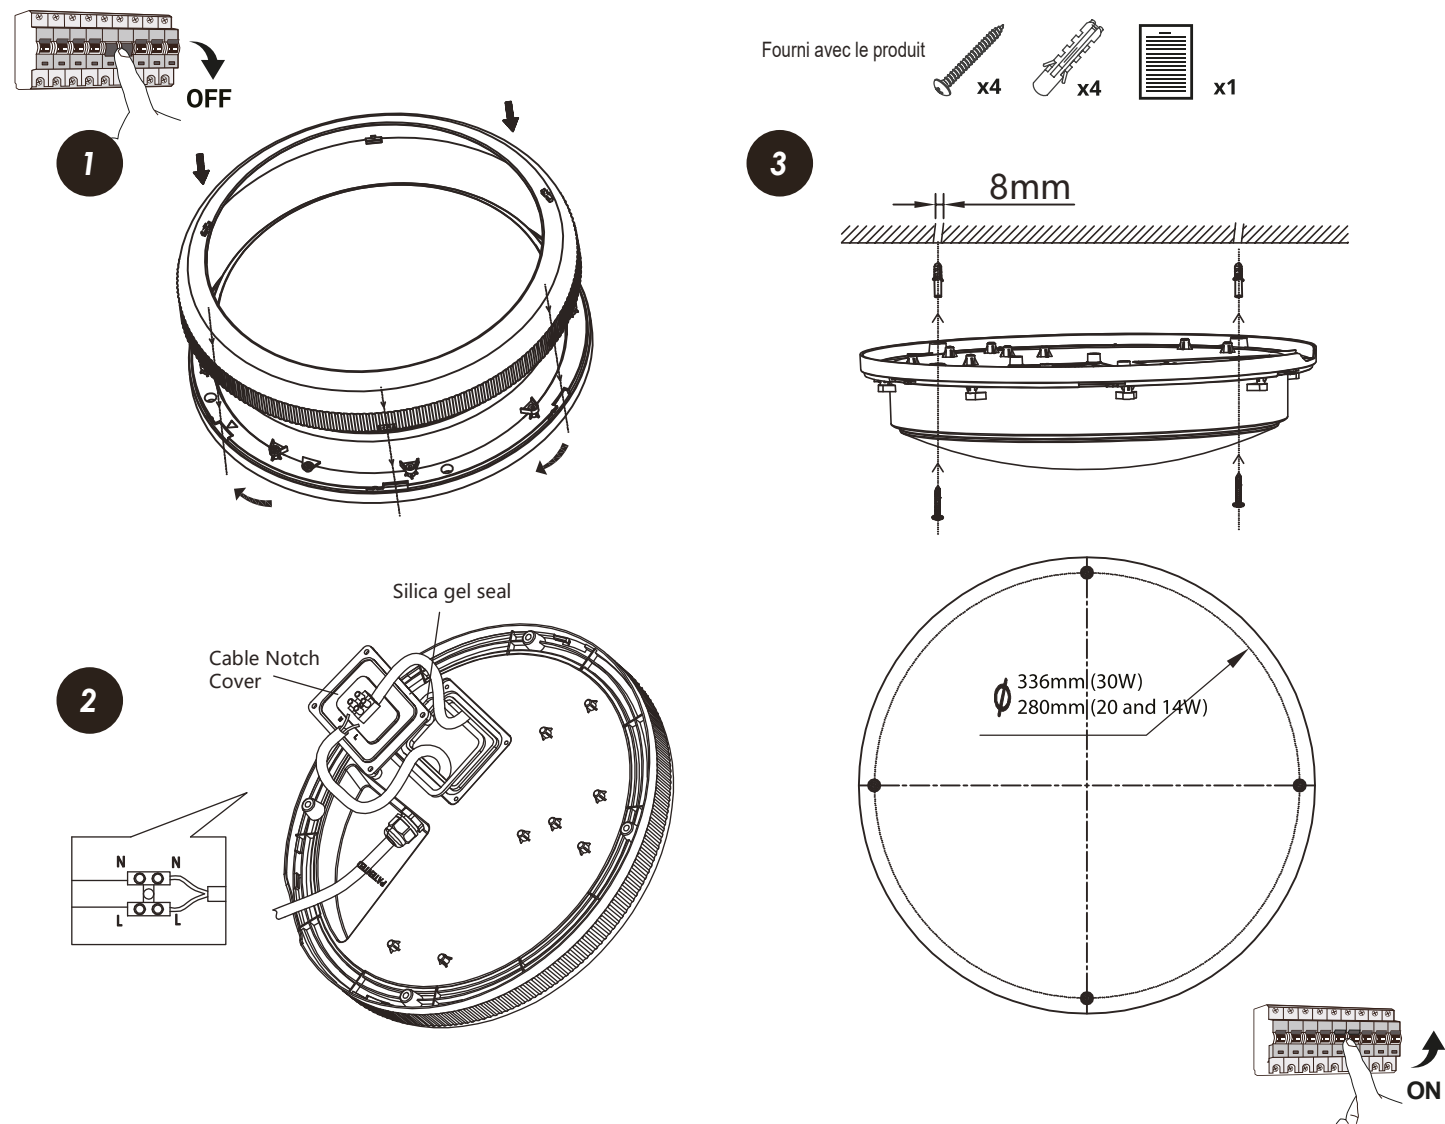

Version avec détecteur / Sensor version:

HF system : 5.8 GHz, ISM wave band <0,5W
P consumption : (standby)
Zone de détection / detection zone : Max 12m x 6m

Réglage usine / factory settings : distance 6m; 90 sec; 10lx

Sensibilité à la détection / detection sensibility : 10%, 25%, 50%, 75%, 100%
Temporisation / Hold time : 5s, 30s, 90s, 3mn, 20mn, 30mn
Luminosité / Daylight sensor : 2lx, 10lx, 25lx, 50lx, No
Angle de détection / Detection angle : mur / wall : 150° plafond / ceiling : 360°
Temp de fonctionnement / Operating Temp : -20°C to 50°

Comment régler / How to set ? :



Ouvrir le luminaire, retirer le diffuseur (8 vis) /
Open the luminaire, remove the difuser (8 screws)
ATTENTION : effectuer cette manoeuvre hors tension

Réglage / Settings

I: up to 6m
II: up to 4m
III: up to 3m
IV: up to 2m
V: up to 1m

ON		1	2	3	
	ON	ON	ON	100%	
		ON	ON	75%	
		ON	ON	50%	
		ON	ON	25%	
		ON	ON	10%	

distance de détection max

I: 5s
II: 30s
III: 90s
IV: 3min
V: 20min
VI: 30min

ON		4	5	6	
	ON	ON	ON	5s	
		ON	ON	30s	
		ON	ON	90s	
		ON	ON	3min	
		ON	ON	20min	
		ON	ON	30min	

temporisation


I: 2lux,
II: 10lux,
III: 25lux,
IV: 50lux,
V:

nuit / night
nuit / night
pénombre / twilight
pénombre / twilight
hors service* / disable*

ON		7	8	9	
	ON	ON	ON	2lux	
	ON	ON	ON	10lux	
	ON	ON	ON	25lux	
	ON	ON	ON	50lux	
	ON	ON	ON	Disable	

sensibilité à la lumière

* détectera que les mouvements, ne prendra pas en compte la luminosité
only motion is detected regardless the daylight level

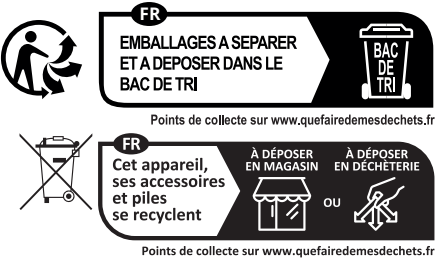

Les données contenues dans ce manuel ne sont fournies qu'à titre d'information et peuvent être sujettes à modification, sans notification préalable. Beled se réserve le droit de modifier le produit ainsi que son manuel sans aucune restriction ou obligation de prévenir l'utilisateur. Ainsi, il est possible que le produit acheté diffère quelque peu de celui décrit au sein du présent document. La dernière version du manuel en ligne prévaut sur celle-ci. Pour l'obtenir, rendez-vous sur <https://www.beledpro.fr/fr/>

The data contained in this manual is provided for information purposes only and may be subject to change without prior notice. Beled reserves the right to modify the product and its manual without any restriction or obligation to notify the user. It is therefore possible that the product purchased may differ slightly from that described in this document. The latest version of the online manual takes precedence over this one. To obtain it, visit <https://www.beledpro.fr/fr/>