

# ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Product designation		Rotary cam
9		switches
Product type designation  General characteristics		7GN40
Switching diagram		20 - Dahlander motor 2-speed reversing switch
N° of elements		6
Mounting form		O - Rear mounting with black handle
Contact characteristics		
Rated insulation voltage Ui		
IEC/EN	V	690
UL/CSA	V	600
Rated impulse withstand voltage Uimp  Conventional free air thermal current Ith	kV	6
	۸	40
IEC/EN UL/CSA	A	40 50
	A V	480
Rated operational voltage	<u> </u>	
Rated operational impulse voltage	kV	4
Maximum fuse size for short-circuit protection In (gG)  10kA	Α	40
15kA	A	40
25kA	A	40
50kA	A	40
63kA	Α	40
Rated short time current Icw		
1s	Α	1000
Conductivity		10/5 mA/V
Operational current le IEC/EN		
AC1/AC21A		
	Α	40
AC15		
110V	Α	25
220/230V	Α	22
380/400V	Α	12
660/690V	Α	2
Rated operational power in AC		
Three-phase AC-3		
220/230V	kW	8
380/440V	kW	15
500/690V	kW	15
Single-phase AC-3	L/\ <i>\\</i>	2
110V	kW	3
220/230V 380/440V	kW kW	6.5 8
Three-phase AC23A	IV V V	U
220/230V	kW	8
380/440V	kW	18.5
500/690V	kW	22
Single-phase AC23A		
110V	kW	3




# ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

		220/230V	kW	6
		380/440V	kW	11
Rated operational curr				
	DC21A	4017	•	40
		48V	Α	40
		60V	Α	40
		110V	Α	6
		220V	A	0.9
	DC23A (poles in series)			
		24V	Α	40 (1)
		48V	Α	40 (2)
		60V	Α	40 (3)
		110V	Α	20 (3)
		220V	Α	12 (4)
	DC13			
		24V	Α	40
		48V	Α	32
		60V	Α	16
		110V	Α	3
Power dissipation			W	2.0
Mechanical features				
Terminals screw				M4
Tightening torque for t	erminals max		Nm	1.2
Conductor size				
	AWG - Rigid cable			
		min	AWG	16
		Max	AWG	8
	AWG - Flexible cable	Wich	71110	
	AVVG T TEXIBIC CUBIC	min	AWG	16
		Max	AWG	10
	Conductor size (IEC) - Flexible cable	IVIAX	AWG	10
	Conductor Size (IEC) - Plexible cable	min	mama <sup>2</sup>	1.5
		min Max	mm² mm²	1.5 6
	Conductor size (IEO) Divid calls	IVIAX	ППП	0
	Conductor size (IEC) - Rigid cable			4.5
		min	mm²	1.5
NA 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Max	mm²	10
Mechanical life			cycles	5x10 <sup>6</sup>
UL technical data	and Programme (see			
Motor power for direct				
	for three-phase motor	100:		_
		120V	HP	5
		240V	HP	10
		480V	HP	20
		600V	HP	20
	for single-phase motor			
		120V	HP	2
		240V	HP	5
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+55
				_
	Storage temperature			
	Storage temperature	min	°C	-40

**ENERGY AND AUTOMATION** 


### ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

Resistance & Protection
Frontal IP degree
IP40
Terminals IP degree
IP00
Dimensions

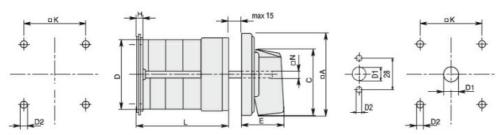

Series	Dimensions							L Number of elements												
Series	□A	С	ØD	ØD2	Е	Н	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
7GN12	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN20	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN25	48	39.5	43	5	26.5	5	36	6	42.5	56.1	69.7	83.3	96.9	110.5	124.1	137.7	151.3	164.9	178.5	192.1
7GN32	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN40	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN63	65	53	62	6	34.5	7.5	68	7	53.3	71.4	89.5	107.6	125.7	143.8	161.9	180	198.1	216.2	234.3	252.4
7GN125	90	70.5	86	6	41.4	7.5	68	9	74.8	103.9	133	162.1	191.2	220.3	249.4	278.5	307.6	336.7	365.8	394.9

#### Wiring diagrams

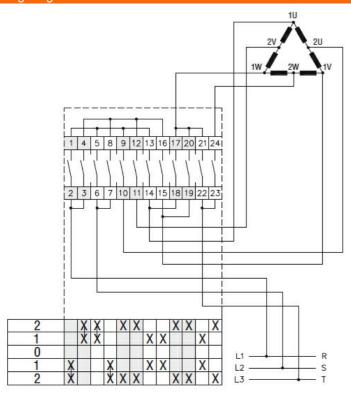

#### Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1



### 7GN4020O

ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 40A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

	UL60947-4-1							
Certificates								
	cCSAus							
	EAC							
	UL							
ETIM classification	n							

ETIM 8.0

EC001029 -Selector switch, complete