

22260781	DATA SHEET	
Valid from: 24.01.2024	AB-PC4-(L*)PUR-M12FS	

Product description

- Sensor/actuator cable, 4-pol, PUR halogen-free, black
- Straight M12-jack on free conductor end



General characteristics

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -25 °C to +80 °C (-13°F to 176°F) (cable, fixed installation) -5 °C to +80 °C (23°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260781	AB-PC4-2,0PUR-M12FS	2	straight
22260782	AB-PC4-5,0PUR-M12FS	5	straight
22260783	AB-PC4-10,0PUR-M12FS	10	straight

Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	250 V
Rated current at 40 °C	4 A
Overvoltage category	II
Pollution degree	3

Mechanical properties

Jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing

Line

Cable construction	4 x AWG18/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,75 mm ² (Poewr line)
Conductor diameter including isolation	1,75 mm ± 0,02 mm

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260781EN Version: 07	Page 1 of 2
---	---------------------------------------	-------------


22260781	DATA SHEET	
Valid from: 24.01.2024	AB-PC4-(L*)PUR-M12FS	

Cable outer diameter D	5,9 mm ± 0,15mm
Insulation color	brown, white, blue, black
Sheath color	grey-black, RAL 7021
Number of bending cycles	2.000.000
Bending radius	59 mm
Traveling distance	5 m
Traveling speed	3 m/s
Acceleration	5 m/s ²
Cable weight	57 kg/km
Outer coating, material	PUR
Wire insulation, material	PVC
Insulation resistance	≥ 1 MΩ*km (bei 20 °C)
Conductor resistance	≤ 26 Ω/km (bei 20 °C)
Flame resistance	acc. to UL 758/1581 FT2 UL 758/1581 (horizontal)
Oil resistance	acc. to DIN EN 60811-2-1, 168h at 100 °C


Standards/Approvals

Product standard, M12 connector	IEC 61076-2-101
---------------------------------	-----------------


Technical drawing

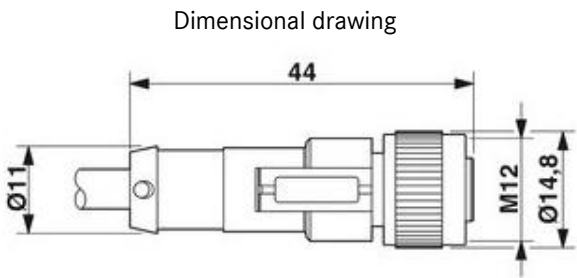


Jack M12 x 1, straight

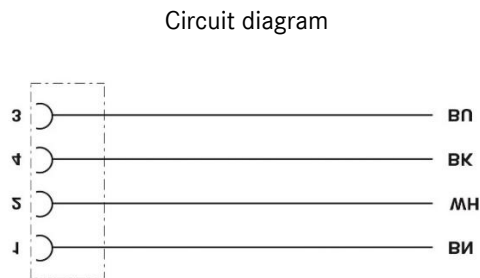

Pin assignment M12-jack



Pin assignment M12-jack, 4-pol, A-coding



Application range

For increased mechanical load and rough operating conditions

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260781EN Version: 07	Page 2 of 2
---	---------------------------------------	-------------