

61742400	<b>DATA SHEET</b>
Valid from: 14.03.2024	<b>Shrink tube PROTECT</b>

Shrink tube for industrial applications:  
For electrical insulation, Strain relief, wire bundling and protection.



**Material:** Polyolefin


**Technical features:**

Shrink ratio: 2:1  
 Shrink temperature: >90°C  
 Temperature range: -55°C bis +135°C

**Color:** black  
green/yellow

**Additional features:**

Tensile strength: 13 N/mm<sup>2</sup>  
 Elongation at break: 300%  
 Longitudinal change: -10% up to +1%  
 Dielectric strength: 20 kV/mm  
 Volume resistivity: 10<sup>14</sup> Ω/cm  
 Flammability: acc. to UL 224

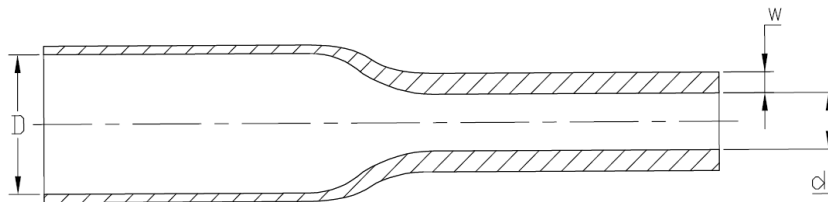

**Dimensions:**

Package Unit	Part No.	Size D inch	Inner Diameter mm		Recovered wall thickness w mm
			supplied D	recovered d	
<b>Box</b>					
	<b>Black</b>				
	61742423	3/64	1,2	0,6	0,41
	61742424	1/16	1,6	0,8	0,43
	61742425	3/32	2,4	1,2	0,51
	61742426	1/8	3,2	1,6	0,51
	61742427	3/16	4,8	2,4	0,51
	61742428	1/4	6,4	3,2	0,65
	61742429	3/8	9,5	4,8	0,65
	61742430	1/2	12,7	6,4	0,65
	61742431	3/4	19,1	9,5	0,77
	61742433	1	25,4	12,7	0,89
<b>Pieces</b>					
	<b>Black</b>				
	61742400	3/64	1,2	0,6	0,41
	61742401	1/16	1,6	0,8	0,43
	61742402	3/32	2,4	1,2	0,51

61742400	<b>DATA SHEET</b>
Valid from: 14.03.2024	<b>Shrink tube PROTECT</b>

	61742403	1/8	3,2	1,6	0,51
	61742404	3/16	4,8	2,4	0,51
	61742405	1/4	6,4	3,2	0,65
	61742406	3/8	9,5	4,8	0,65
	61742407	1/2	12,7	6,4	0,65
	61742408	3/4	19,1	9,5	0,77
	61742409	1	25,4	12,7	0,89
	<b>Green/Yellow</b>				
	61742416	1/8	3,2	1,6	0,51
	61742417	3/16	4,8	2,4	0,51
	61742418	1/4	6,4	3,2	0,65
	61742419	3/8	9,5	4,8	0,65
	61742420	1/2	12,7	6,4	0,65
	61742421	3/4	19,1	9,5	0,77
	61742422	1	25,4	12,7	0,89

Commodity product, not a Lapp product.