83256155 DATA SHEET Valid from: FLEXIMARIA® Water ring Johnson

FLEXIMARK® Wrapping labels LCK 70 WH



General description

17.09.2018

- For cable marking and for printing with commercial laser printers
- A transparent foil is wrapped around the cable and pasted over the printed fields, that the printing is protected against abrasion and pollution
- Resistant to chemicals, UV-radiation, moisture and some oils
- Diverse criteria as ageing resistance and chemical resistance are tested by the independent SP institute in according to SP 2171 test method

Characteristics:

Colour White

Material Halogen-free polyester

Thickness 0.025 mm

Temperature range -40°C to +125°C

Minimum working temperature: +10°C


83256155

DATA SHEET

Valid from: 17.09.2018

FLEXIMARK® Wrapping labels LCK 70 WH



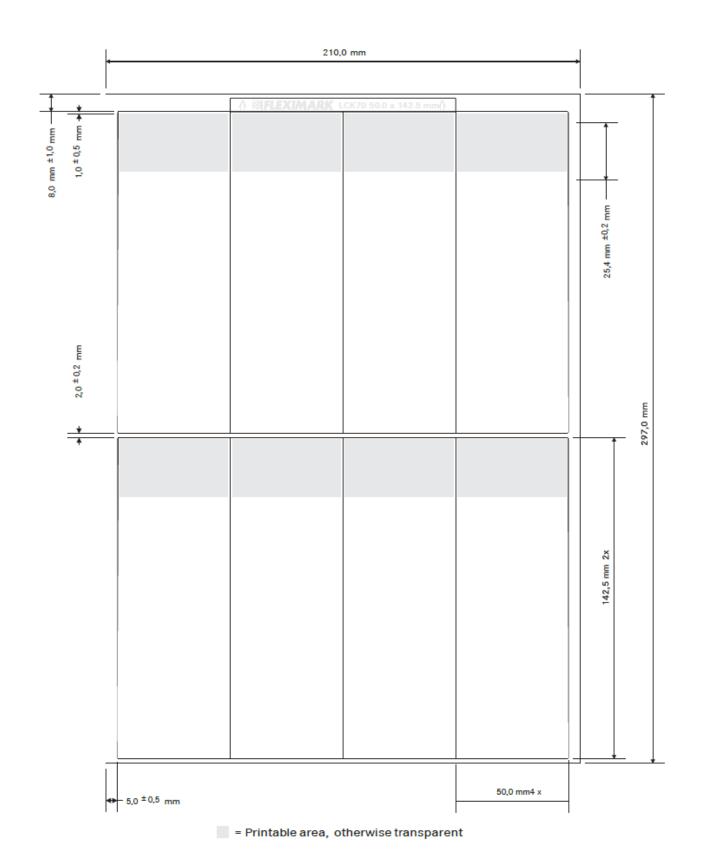

Elaborated by: FLEXIMARK AB	Document: DB83256155EN Version: 01	Page 2 of 2
I LEMINARIK AD	Version. Or	