Plug : TM31P-TM-88P

HRS
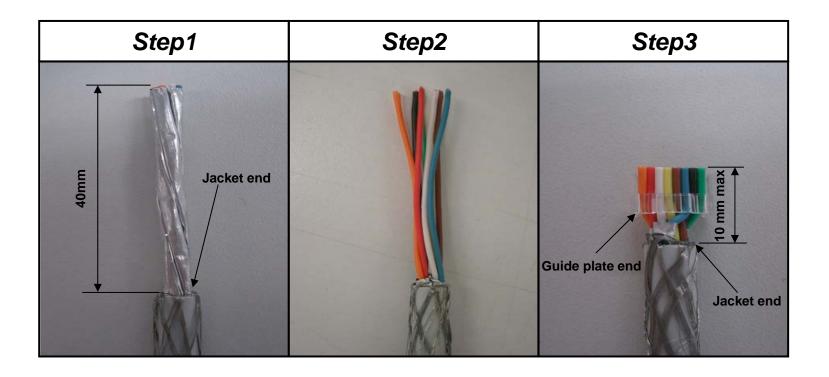
Cable assembly method to have CAT6a performance

Plug design makes it possible for users to lengthen jacket end

and have steady CAT6a performance.

Step1	*Step2*	*Step3*
40mm — Jacket end		Guide plate end — 10 mm max — Jacket end

Plug ：TM31P-TM-88P

HRS

Cable assembly method to have CAT6a performance

**Plug design makes it possible for users to lengthen jacket end
and have steady CAT6a performance.**

Step4	*Step5*	*Step6*
17mm Copper tape		