


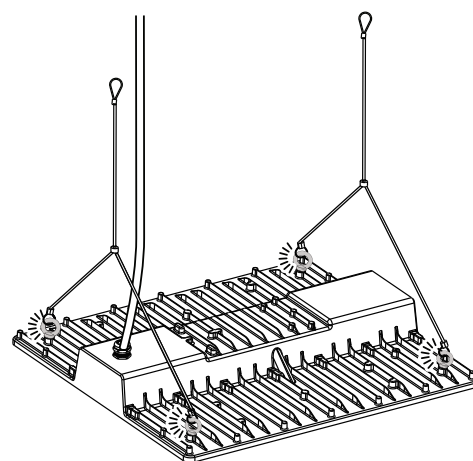




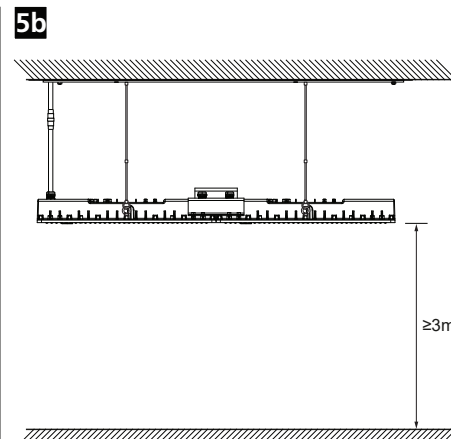

	L [mm]	W [mm]	H1 [mm]	H2 [mm]		ta [°C]
9 klm	446	481	66	86	<5.0	 +50 -30
13 klm	446	481	66	86	<5.0	 +50 -30
20 klm	446	481	66	86	<5.0	 +50 -30
26 klm	446	481	66	86	<5.0	 +50 -30
32 klm	446	481	66	86	<5.0	 +50 -30
40 klm	446	963	66	96	<11.0	 +50 -30
52 klm	446	963	66	96	<11.0	 +50 -30


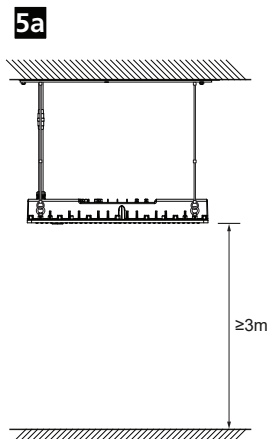


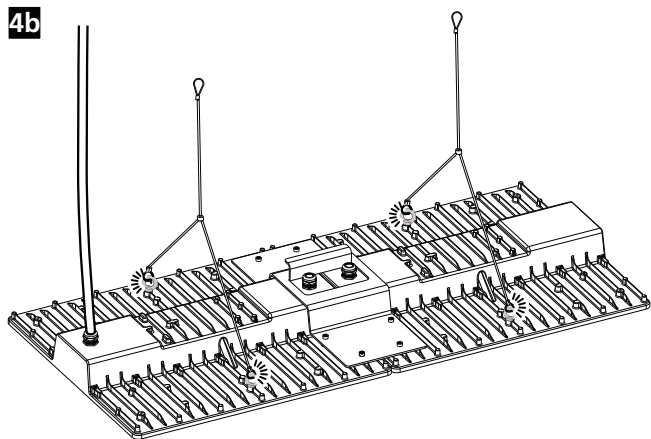

6 ⚡ 220-240V + DALI ~



Min. 600V AC / 5A, IP65



5 x 1.0mm²

Y-type

