


Concord



Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.07	5200 4180
1.0	0.14	2700 1540
1.5	0.21	900 480
2.0	0.28	510 280
2.5	0.35	320 180
3.0	0.42	230 130

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (half beam angle: 8.9°)

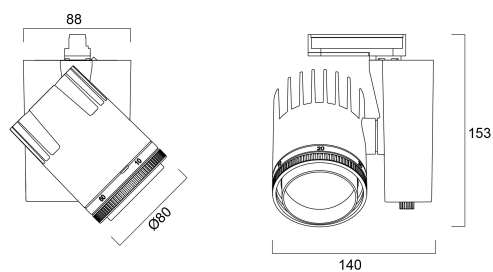