

SPLICING BLOCK FOR 2 FLEXBUS CONDUCTORS 220MM² OR 360MM² FOR LENGTH EXTENSION

CATALOG NUMBER

FLEXSB220-360



The nVent ERIFLEX Splicing Blocks are designed for extending Flexbus conductors with a strong, compact design that ensures high short-circuit resistance and easy installation in various positions. They support extensions above 25 meters for 220-960mm² conductors and above 15 meters for 1280-1810mm² conductors. The blocks feature a powder-painted aluminum connector to prevent galvanic corrosion and nonmagnetic stainless steel screws.

The flexible insulated cover provides Class II insulation, resists high temperatures up to 115°C, has an IP55 rating for water and dust protection, and is treated to resist rodent and termite attacks. The blocks comply with IEC 61 439-1 and IEC 60 364 standards and carry CE and UKCA certifications.

FONCTIONS

Strong and compact design for high short-circuit resistance

High-temperature resistant cover treated against rodent and termite attacks

Compliance with IEC standards and CE/UKCA certifications

Multiple connection options: vertical, horizontal, flat position, or on edge

Durable and reliable performance in various applications

IP55 water and dust resistance

UV-resistant material

Flame-retardant, Low smoke, Halogen-free

CARACTÉRISTIQUES DU PRODUIT

Article Number: 508163

Material: Thermoplastic Elastomer;Ethylene Propylene Rubber

Complies With: IEC® 60695-2-11 (Glow Wire Test 960 °C);IEC® 61439.1;IEC® 61439,1 Class II;IEC® 60364

Cross Section: 220mm²;360mm²

A : 264 mm

B : 111 mm

C : 120 mm

IP Rating: IP55

Dielectric Strength: 20

Flammability Rating: UL® 94V-0

Halogen Free Rating: UL® 2885;IEC® 60754-1;IEC® 62821-2

Low Smoke Rating: UL® 2885;IEC® 61034-2;ISO 5659-2

Insulation Elongation: 500 % max.

Insulation Thickness: 3 mm

Working Temperature: -50 à 115 °C


Température d'installation min. : 5

UV Resistance Rating: UL® 2556;UL® 854

Rodent & Termite Proof: Tested as per GB/T 34016-2017 & DIN EN 117

Unit Weight: 2,1 kg

DIAGRAMS

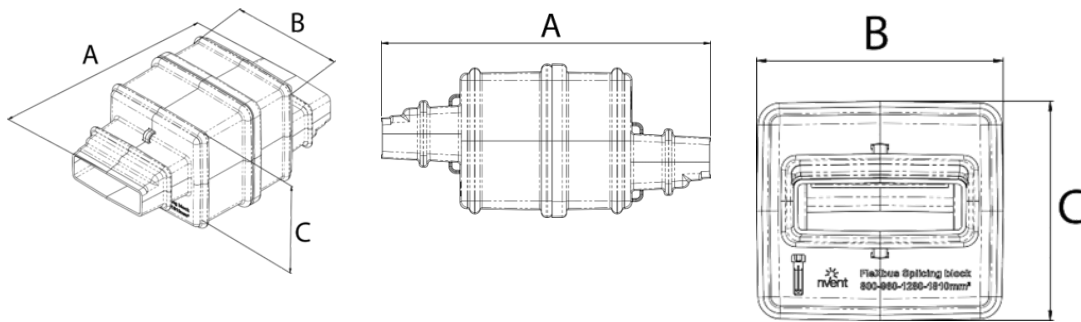

AVERTISSEMENT

Les produits nVent doivent être installés et utilisés conformément aux consignes figurant dans les fiches d'instructions et les documents de formation des produits nVent. Les fiches d'instructions sont disponibles à l'adresse suivante : www.nvent.com et auprès de votre représentant du service client nVent. Une mauvaise installation, une utilisation incorrecte, une application erronée ou toute autre forme de non-respect scrupuleux des instructions et avertissements de nVent peuvent entraîner un dysfonctionnement du produit, des dommages matériels, des lésions corporelles graves et le décès et/ou annuler votre garantie.

Amérique du Nord

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER